GENERAL NOTES

1.1 CONTRACTOR TO VERIFY ALL DIMENSIONS ON SITE BEFORE WORK COMMENCES. ANY DISCREPANCIES TO BE REPORTED BACK TO THE ARCHITECTS' OFFICE IMMEDIATELY.

1.2 ALL DIMENSIONS ARE IN METRIC AND BASIC LENGTH ARE IN MILLIMETRES.

1.3 ALL FIGURED DIMENSIONS TO TAKE PRECEDENT TO SCALED DIMENSIONS.

1.4 SEWERAGE & SANITARY PIPING LAYOUT REFER TO C/S & M/E ENGRS' DWGS.

1.5 R.C. DRAWINGS & CALCULATIONS TO BE SUBMITTED BY STRUCTURAL ENGINEER BEFORE WORK COMMENCES.

1.6 DRAINAGE LAYOUT & DETAILS TO BE SUBMITTED BY ENGINEER BEFORE WORK COMMENCES.

1.7 ALL 115MM THICK BRICKWALL EXCEEDING 4500MM IN LENGTH TO BE PROVIDED WITH R.C. STIFFENERS.

1.8 ALL BRICKWORK TO BE REINFORCED WITH `EXMET' AT EVERY 4TH COURSE.

1.9 TO PROVIDE DPC TO ALL GROUND FLOOR BRICKWORK.

1.10 ALL DOOR & WINDOW OPENINGS TO BE PROVIDED WITH R.C. LINTELS.

1.11 ALL BRICKWALLS TO BE PLASTER / SKIMCOAT & PAINTED FINISHED TO APPROVAL UNLESS OTHERWISE STATED.

1.12 ALL RC WALLS TO BE SKIM COAT / PAINTED TO A MINIMUM THICKNESS OF 3MM & A MAXIMUM OF 5MM UNLESS OTHERWISE STATED.

SITE MASTER PLAN LEGEND

🟥	SITE BOUNDARY
─ · ─	XQL,T13;6M BUILDING SETBACK FROM SITE BOUNDARY LINE(AHJ REQUIREMENT)
───	XQL;12M BUILDING SETBACK FROM SITE BOUNDARY LINE(AHJ REQUIREMENT)
═══	TYPE1:Security K4 Anti-Climb Fence
══ ══	TYPE2:2400MM Normal Security Anti-Climb Fence (Without Retaining Wall)
▥	PEDESTRIAN CROSSING
⁘	LANDSCAPE

LOGISTICS AND ACCESS DIAGRAM PLAN LEGEND

LEGEND	
- - ➜	LOGISTICS ROUTE
- - ➜	PERSONNEL ROUTE

FIRE ESCAPE LEGEND

LEGEND	
- - ➜	FIRE ESCAPE

FIRE COMPARTMENTATION PLAN LEGEND

LEGEND	
- - -	2 HOUR FIRE RATED CONCRETE PANEL WALL
- - -	CONCRETE PANEL WALL
- - -	CAST IN SITU CONCRETE WALL
- - -	COMPOSITE ROCK WOOL INSULATED WALL PANEL

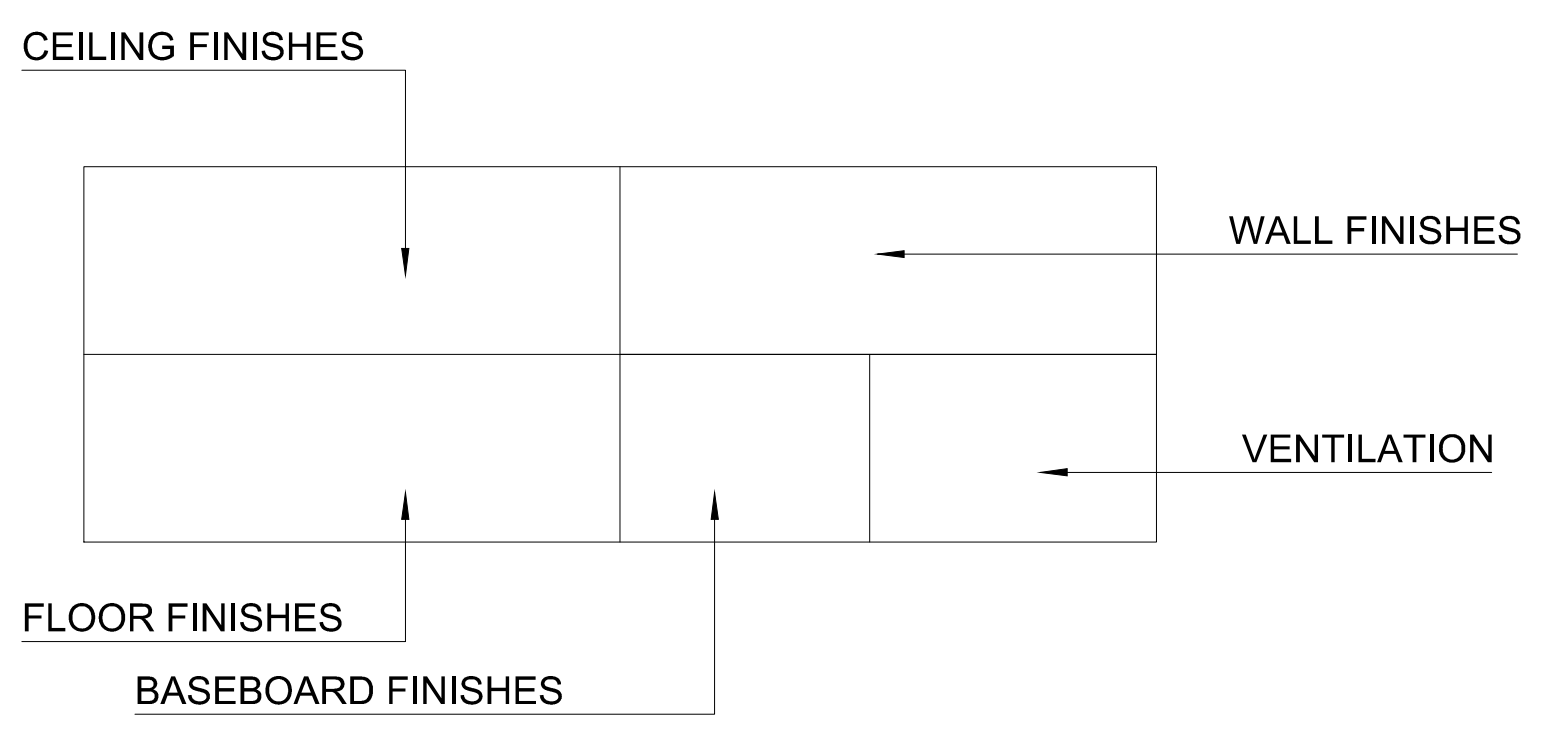

ANTI-TERMITE TREATMENT :
ANTI TERMITE TREATMENT SHALL BE EXECUTED BY APPROVED APPLICATOITHE CONTRACTOR SHALL ALLOW FOR :
1. WORKING IN 4-STAGES
2.PROVSIONOFA FIVE (5L VEARS ONT UARANIEE BY MANUJACLER AND APPICAOR COMMENCING FROMTHE DALE OF CERFICALE OF PRACICAL COMPEION ON QUALLY OF MAIERALS AND STANDARD OF WOKMANSHIL
3. PROVISION OF TREATMENT AGAINST TERMITE ATTACK DURING THE QUARANTEE PERIOD FREE OF CHARGE TO THE EMPLOYER THE TERMITICIDE TO BE USED IS "HEXTAR" OR APPROVED EQUIVALENT LMIDACLOPNID: AT A DILUTION RATE OF 1:800: TO COMPLY WITH THE SPECIALIST REQUIREMENTS
TREATMENT METHOD:POWER SPRAY THE COMPACTED SOIL SURFACE AT THE RATE OF 5 LITRES/M2 OF TERMICIDE AT THE CORRECT CONCENTRAION FOR EVERY SQUARE METER POWER SPRAY THE COMPACTED SOILSURFACE FOR PILE CAP, GROUND BEAM, GROUND FOOR, AND APRON AT THE RATE OF 5 ITRESLM2 OF TEMITICIDE FOR EVERY SOUARE METER

BEFORE POURING THE CONCRETE FOR THE STRUCTURAL FLOOR SLAB ON THE GROUND LEVEL, A 0.2MM THICK PE DAMP-PROOF MEMBRANE SHALL BE LAID IN AN ADDITIONAL LAYER TO MEET THE MOISTURE-PROOF REQUIREMENTS FOR THE GROUND FLOOR.

FLOOR FINISHES

CODE NO.	DESCRIPTION	SPECIFICATION	Vender
F-1	STRUCTURE SLAB	NO FLOOR FINISHING	LOCAL
F-2	CONCRETE WEAR-RESISTANT FLOOR FINISH	CURING AGENT_CARBORUNDUM	LOCAL
F-3	CONCRETE STEEL TROWEL FINISH	CONCRETE SCREED + CURING AGENT	LOCAL
F-4	CONCRETE SCREED + EPOXY FLOORING	CONCRETE STEEL TROWEL FINISH, TOP PAINT WITH LOW VOC,EPOXY COATING; LOW VOC CONTENT & EMISSION PRIMER FOR EPOXY COATING	LOCAL
F-5	CONCRETE STEEL TROWEL FINISH	CONCRETE SCREED + CURING AGENT+ 1.2mm THKCEMENTITIOUS WATERPROOF COATING	LOCAL
F-6	CONCRETE SCREED + EPOXY FLOORING	EPOXY+ 1.2mm THKCEMENTITIOUS WATERPROOF COATING	LOCAL
F-7	CERAMIC TILE	600X600 CERAMIC TILE ON CONCRETE STEEL TROWEL FINISH; LOW VOC CONTENT & EMISSION ADHESIVE	LOCAL
F-8	PORCELAIN TILE	600X600 12MM THK NON-SLIP HOMOGENOUS TILE (R10) ON 1.2mm THKCEMENTITIOUS WATERPROOF COATING, LOW VOC TILE ADHESIVE AND GROUT	LOCAL
F-9	CERAMIC TILE	300X300 12MM THK CERAMIC TILE,LOW VOC TILE ADHESIVE AND GROUT	LOCAL
F-10	OIL-RESISTANT FLOOR	CONCRETE SCREED + CURING AGENT + OILPROOFING	LOCAL
F-11	ANTI-STATIC EPOXY FLOORING	ANTI-STATIC + EPOXY+ 1.2mm THKCEMENTITIOUS WATERPROOF COATING	LOCAL
F-12	ANTI-STATIC RAISED FLOOR	ANTI-STATIC + ESD CALCIUM SULFATE RAISED FLOOR SYSTEM WITH HPL FINISH ON CONCRETE SCREED + EPOXY(800MM HIGH) + 1.2mm THKCEMENTITIOUS WATERPROOF COATING	LOCAL
F-13	RAISED FLOOR	ESD CALCIUM SULFATE RAISED FLOOR SYSTEM WITH HPL FINISH ON CONCRETE SCREED + EPOXY(800MM HIGH) + 1.2mm THKCEMENTITIOUS WATERPROOF COATING	LOCAL
F-14	METAL MESH CATWALK	METAL MESH CATWALK ON STRUCTURE FRAME	LOCAL
F-15	WATERPROOFING ROOF	SELF-ADHESIVE POLYMER-MODIFIED BITUMEN WATERPROOFING MEMBRANE(3+3mmTHK.)+NON-CURING RUBBER ASPHALT WATERPROOF COATING(2mmTHK.)+XPS INSULATION BOARD(75mmTHK R-12(12 BTU/(h·°F·ft2)(2.12(K·m2)/W))Or Better) (XPS insulation board density ≥ 30 kg/m³, compressive strength ≥ 250 kPa) +REINFORCED CONCRETE COVER(50mm THK For Roof Slab Top Coat With TOA Heatshield Paint SRI≥82)	LOCAL

CEILING FINISHES

CODE NO.	DESCRIPTION	SPECIFICATION	VENDER
C-1	EXPOSED CEILING	EXPOSED CEILING, NO PAINT FINISH	LOCAL
C-2	EXPOSED CEILING	ANTI-DUST PAINT	LOCAL
C-3	MOISTURE-PROOF PAINT	MOISTURE-PROOF PAINT ON CONCRETE CEILING SLAB	LOCAL
C-4	CALCIUM SILICATE BOARD CEILING	600X600MM LOW VOC CONTENT & EMISSION CALCIUM SILICATE BOARD,10MM.THK ,INSTALLED ON T-GRID SUSPENSION SYSTEM	LOCAL
C-5	ALUMINIUM BUCKLE PLATE CEILING	MOISTURE PROOF ALUMINIUM BUCKLE PLATE CEILING + ANTI-DUST PAINT SOFFIT	LOCAL
C-6	GRID CEILING SYSTEM	600X1200MM HEAVY DUTY SUSPENSION GRID DUST FREE / LOW VOC CONTENT & EMISSION CEILING TILE ANTI-DUST PAINT ON CONCRETE CEILING SLAB	LOCAL
C-7	EXPOSED CEILING	EXPOSED CEILING, SKIM COATED LOW VOC CONTENT & EMISSION PAINT	LOCAL

WALL FINISHES

CODE NO.	DESCRIPTION	SPECIFICATION	VENDER
W-1	EXPOSED WALL	CONCRETE SEALER	LOCAL
W-2	SCRUB RESISTANT PAINTED WALL	SKIM COAT WITH SCRUB RESISTANT PAINT	LOCAL
W-3	PAINTED WALL	SKIM COAT WITH PAINT	LOCAL
W-4	ANTI-DUST PAINTED WALL	SKIM COAT WITH ANTI-DUST PAINT	LOCAL
W-5	CERAMIC TILE WALL	12MM THK WATERPROOF HOMOGENOUS TILE	LOCAL

BASEBOARD FINISH

CODE NO.	DESCRIPTION	SPECIFICATION	VENDER
B-1	EXPOSED BASEBOARD	NO FINISH	LOCAL
B-2	STAINLESS STEEL BASEBOARD	10mm THK STAINLESS STEEL	LOCAL
B-3	CERAMIC TILE BASEBOARD	12mm THK CERAMIC TILE	LOCAL

WALL MATERIAL SELECTION

WALL NO.	DESCRIPTION	SPECIFICATION	VENDER
P1	CAST-IN-PLACE CONCRETE PANEL WALL	CAST-IN-PLACE CONCRETE PANEL WALL(DETAILED STRUCTURAL CONSTRUCTION DRAWINGS)	LOCAL
P2	PRE-CAST CONCRETE PANEL WALL	100MM PRE-CAST CONCRETE PANEL WALL(INCLUDES 30MM RESERVED INSTALLATION DISTANCE)(U-value < 0.5 W/(m²·K)	LOCAL
P3	LIGHT STEEL CALCIUM SILICATE BOARD	100 MM LIGHT GAUGE STEEL FRAMING WITH FIBER CEMENT CALCIUM SILICATE COMPOSITE BOARD PARTITION	LOCAL
P4	PRECAST ACC CONCRETE WALL PANELS	100MM PRECAST ACC CONCRETE WALL PANELS(U-value < 0.5 W/(m²·K)	LOCAL
P5	PRECAST ACC CONCRETE WALL PANELS	200MM PRECAST ACC CONCRETE WALL PANELS	LOCAL
P6	CONCRETE BLOCK WALL	200MM CONCRETE BLOCK WALL	LOCAL

DOOR SCHEDULE

	DESCRIPTION	SISE(MM) WIDTH X HEIGHT
2HR FD1	G.I METAL FRAME SINGLE LEAF2 HOUR FIRE RATED SOLID STEEL DOOR PANEL	1100 X 2400
2HR FD2	G.I METAL FRAME DOUBLE LEAF 2 HOUR FIRE RATED SOLID STEEL DOOR PANEL (THE DOOR OPENS 180 DEGREES)	2200 X3100
2HR FD3	G.I METAL FRAME DOUBLE LEAF 2 HOUR FIRE RATED SOLID STEEL DOOR PANEL	1800 X 2400
2HR FD4	G.I METAL FRAME DOUBLE LEAF 2 HOUR FIRE RATED SOLID STEEL DOOR PANEL	1500 X 2200
2HR FD5	G.I METAL FRAME DOUBLE LEAF 2 HOUR FIRE RATED SOLID STEEL DOOR PANEL	900 X 2200
2HR FD6	G.I METAL FRAME DOUBLE LEAF 2 HOUR FIRE RATED SOLID STEEL DOOR PANEL (THE DOOR OPENS 90 DEGREES)	2200 X3100
2HR FD7	G.I METAL FRAME DOUBLE LEAF 2 HOUR FIRE RATED SOLID STEEL DOOR PANEL	1500 X 1700
GD1	ALUMINUM-FRAMED CASEMENT DOOR WITH ALUMINUM FIXED GLASS PANEL, TO BE EXECUTED ACCORDING TO MANUFACTURER'S DETAILS	3600 X 4000
D1	WOODEN-FRAMED CASEMENT DOOR, TO BE EXECUTED ACCORDING TO MANUFACTURER'S DETAILS	1100 X 2400
D2	G.I METAL FRAME SINGLE LEAF SOLID STEEL DOOR PANEL	1800 X 2400
D3	S/S FRAME WITH S/S REVOLVING DOOR AND CASEMENT DOOR TO MANUF'S DETAIL AND ARCH'S APPROVAL	2200 X 3500
D4	WOODEN-FRAMED CASEMENT DOOR, TO BE EXECUTED ACCORDING TO MANUFACTURER'S DETAILS	1100 X 2400
D5	PERFORATED ALUMINUM PANEL	1100 X 2400
D6	WOODEN-FRAMED CASEMENT DOOR, TO BE EXECUTED ACCORDING TO MANUFACTURER'S DETAILS	900 X 2400
RS1	ALUMINIUM ROLLER SHUTTER TO MANUF'S DETAIL	2600 X 3600
RS2	ALUMINIUM ROLLER SHUTTER TO MANUF'S DETAIL	9000 X 4000
RS3	ALUMINIUM ROLLER SHUTTER TO MANUF'S DETAIL	3600 X 4000
W1	1.4MIM THK. POWDER COATED ALUMN. FRAME WITH 6MIM THK. DARK GREY TINTED TEMPEREDGLASS TOP HUNG WINDOW TO MANUF'S DETAIL COMPLY SIRIM CERTIFICATE	2400 X 800
W2	1.4MIM THK. POWDER COATED ALUMN. FRAME WITH 6MIM THK. DARK GREY TINTED TEMPEREDGLASS TOP HUNG WINDOW TO MANUF'S DETAIL COMPLY SIRIM CERTIFICATE	1200 X 800
W3	FORCED-ENTRY CLASS WNDOW TO MANUF'SDETAIL(BULLET PROOF GLASS)	3300 X 2100
W4	FORCED-ENTRY CLASS WNDOW TO MANUF'SDETAIL	2800 X 2400
W5	FORCED-ENTRY CLASS WNDOW TO MANUF'SDETAIL	3700 X 1500
W6	1.4MM THK. POWDER COATED ALUMN.FRAME FIXED DETACHABLE LOUVERS TO MANUF'S DETAIL	φ250
W7	1.4MM THK. POWDER COATED ALUMN.FRAME FIXED DETACHABLE LOUVERS TO MANUF'S DETAIL	450 X 300
W8	1.4MM THK. POWDER COATED ALUMN.FRAME FIXED DETACHABLE LOUVERS TO MANUF'S DETAIL	450 X 250
W9	1.4MM THK. POWDER COATED ALUMN.FRAME FIXED DETACHABLE LOUVERS TO MANUF'S DETAIL	600 X 600
W10	1.4MM THK. POWDER COATED ALUMN.FRAME FIXED DETACHABLE LOUVERS TO MANUF'S DETAIL	2600 X 1600

▦	Steel ladder grating plate
◜	Pintu Rintangan API 1 Atau 2 Jam Tertutup Sendiri.
▭	Steel Strucyural Column
▨	Reinforced Concrete Structural Column
▥	Drainage Ditch, Depth Reference Plane

▩	REINFORCED CONCRETE STRUCTURAL COLUMN
☒	0KW/RACK
▭	12KW/RACK
⊠	16KW/RACK
⊗	13.50KW/RACK
⧄	21KW/RACK
▦	STRUCTURAL SLAB DROP 500 MM
▒	STRUCTURAL SLAB DROP 50 MM
⬡	1200mm×2000mm(WIDTH X DEPTH) EVACUATION ROUTES
▧	DUST-TRAP CARPET MEASURINIG
]	TEEL LADDER, DETAILED INSTALLATION PER

NOTE :
2 HOUR FIRE RATED LIFT DOORS
FOR NON PROTECTED LIFT LOBBIES
*FIREMAN INTERCOM AT ALL
*ISOLATION SWITCH AT LIFT LOBBY
* THE "SFL" MARKED IN THE DRAWING REFERS TO THE STRUCTURAL FLOOR LEVEL, WHILE THE FINISHED FLOOR LEVEL (FFL) IS DETERMINED BASED ON FLOOR FINISHES

CLIENT :

GULF EDGE DC 01

87 Wireless Road, M Thai Tower 11th. Floor, All Seasons Place, Lumpini,
Pathumwan, Bangkok 10330, Thailand

CONTRACTOR :

华西发展(泰国)有限公司
บริษัท หัวซือ ดีเวลลอปเม้นต์ (ประเทศไทย) จำกัด
HUASHI DEVELOPMENT CO.,LTD
No. 202, Room No. 1403, 14/F, Le Concorde Building,
Ratchadapisek Road, Huaykhwang Sub-District,
Huaykhwang District, Bangkok Metropolitan 10310.

CONSULTANT :

ARbay
บริษัท เอ อาร์ เบย์ จำกัด
ARbay Company Limited
31 st Floor Bangkok Insurance Building
25 South Sathorn road Thungmahamek
Sathorn Bangkok 10120 THAILAND
T +66 (0) 2286 8199
F +66 (0) 2286 2863
info@arbay.co.th

CONSULTANT :

Qbic Engineers & Architects Co.,Ltd.
8 Soi KALONG 4 SANAMBINNAM ROAD,
THASAI SUB-DISTRICT, MUANG NONTHABURI DISTRICT
, NONTHABURI.
Tel 662-950-4374
Fax 662-580-3231
E-Mail : qbic@qbic.co.th, www.qbic.co.th
QBIC ENGINEERS AND ARCHITECTS CO.,LTD.

CONSULTANT :

MITR
MITR TECHNICAL CONSULTANT CO.,LTD.
1168/8 12th FLOOR, LUMPINI TOWER BUILDING,
RAMA IV RD., THUNGMAHAMEK, SATHORN, BANGKOK 10120, THAILAND
TEL : 0-2679-9079-84
FAX : 0-2679-9085 E-mail: mitr_dd@mitr.com

Architect :	SIGNATURE
ประกิต พนานุรัตน์ วสถ. 580 ที่อยู่ 251/1 ถ.จารุเมือง แขวงรองเมือง เขตปทุมวัน กรุงเทพมหานคร โทรศัพท์ 02-286-8199	

Structural Engineer :	SIGNATURE
วิศวกรผู้ออกแบบโครงสร้าง	
ณัฐสม สงวนวงษ์ วย 1423 ที่อยู่ 2/1 ซ.รามคำแหง 150 ถ.รามคำแหง แขวง สะพานสูง เขต สะพานสูง กทม. 10240	

Structural Inspector :	SIGNATURE
วิศวกรผู้ตรวจสอบโครงสร้าง	
โกมล จุฑาภัทร วย 964 ที่อยู่ 24/18 ซ.นวมินทร์ 129 ถ. นวมินทร์ แขวง นวลจันทร์ เขต บึงกุ่ม กทม. 10230	

Electrical Engineer :	SIGNATURE
วิศวกรผู้ออกแบบระบบไฟฟ้ากำลัง	
นายสุภัทร บูรณวิทย์ วฟก.1265 ที่อยู่ 21 ซอยทานสัมฤทธิ์ 13 ตำบลท่าทราย อ.เมืองนนทบุรี จ.นนทบุรี 11000	

Mechanical Engineer :	SIGNATURE
วิศวกรผู้ออกแบบระบบเครื่องกลและปรับอากาศ	
นายประสิทธิ์ เกียวสุนทร วภ.1221 ที่อยู่ 44/372 ซอยบางกระดี่ 35/1 แขวงแสมดำ เขตบางขุนเทียน กทม. 10150	ประสิทธิ์

Sanitary Engineer :	SIGNATURE
วิศวกรผู้ออกแบบระบบสุขาภิบาล และดับเพลิง	
นายทศวรรษ สันนฤทธิ์ วส. 215 ที่อยู่ บ้านเลขที่ 99/107 หมู่ที่ 3 ต.ศีรษะจรเข้น้อย อ.บางเสาธง จ.สมุทรปราการ 10540	ทศวรรษ

ISSUE/REVISION

REV.	DESCRIPTION	DATE
A	90% DEVELOPED	09/05/2026

PROJECT NAME :
GEDC 01

LOCATION:
Nikhom Phattana district, Rayong ,industrial estate,CPGC

BUILDING :
SITE PLAN

90% DEVELOPED

TITLE :
LEGEND AND GENERAL NOTES

JOB NO.	SCALE 1:100
DRAWN HJC	REF.
CHECKED LJC	DWG.NO. MPK00-90-A-GN-003
APPROVED LXD	
DATE 2026.05.09	

NOTE : THIS PRINT IS OF A CONFIDENTIAL NATURE, IT SHALL NOT BE TRACED,PHOTOGRAPHED,PHOTOSTATED OR REPRODUCED IN ANY MANER,NOR USED FOR ANY PURPOSE WHATSOEVER EXCEPT BY WRITTEN PERMISSION