TYPICAL SECURITY MESH DETAILS

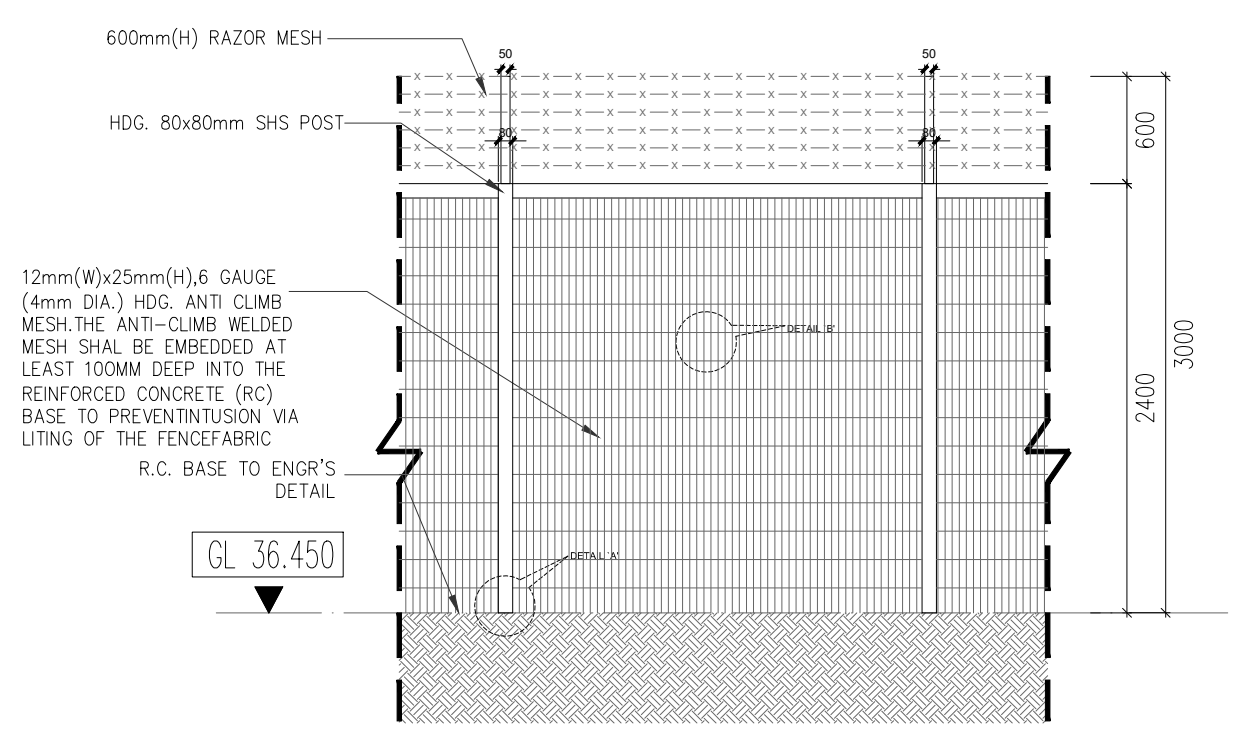
600mm(H) RAZOR MESH
HDG. 80x80mm SHS POST
12mm(W)x25mm(H),6 GAUGE (4mm DIA.) HDG. ANTI CLIMB MESH.THE ANTI-CLIMB WELDED MESH SHAL BE EMBEDDED AT LEAST 100MM DEEP INTO THE REINFORCED CONCRETE (RC) BASE TO PREVENTINTUSION VIA LITING OF THE FENCEFABRIC
R.C. BASE TO ENGR'S DETAIL
DETAIL 'B'
DETAIL 'A'
GL 36.450
50
80
600
2400
3000

ELEVATION E2
SCALE 1:50

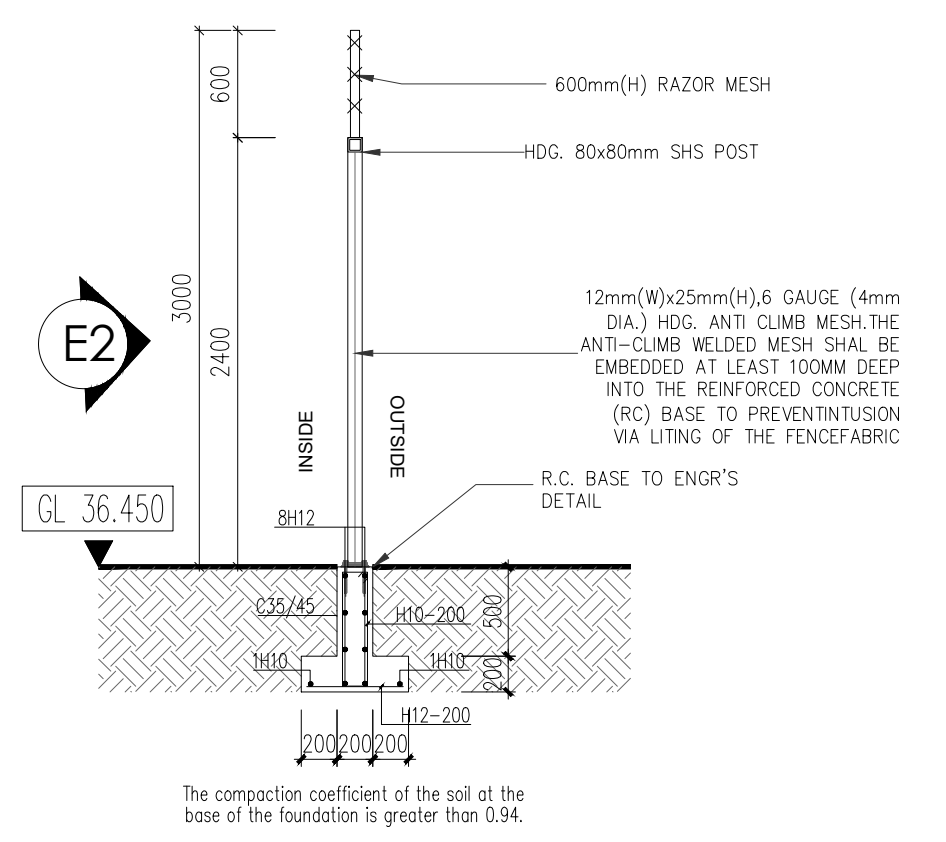
600mm(H) RAZOR MESH
HDG. 80x80mm SHS POST
12mm(W)x25mm(H),6 GAUGE (4mm DIA.) HDG. ANTI CLIMB MESH.THE ANTI-CLIMB WELDED MESH SHAL BE EMBEDDED AT LEAST 100MM DEEP INTO THE REINFORCED CONCRETE (RC) BASE TO PREVENTINTUSION VIA LITING OF THE FENCEFABRIC
R.C. BASE TO ENGR'S DETAIL
E2
INSIDE
OUTSIDE
GL 36.450
8H12
C35/45
H10-200
1H10
H12-200
200 200 200
500
200
600
2400
3000

The compaction coefficient of the soil at the base of the foundation is greater than 0.94.

SECTION S2-S2
SCALE 1:50

TYPE Q FENCING

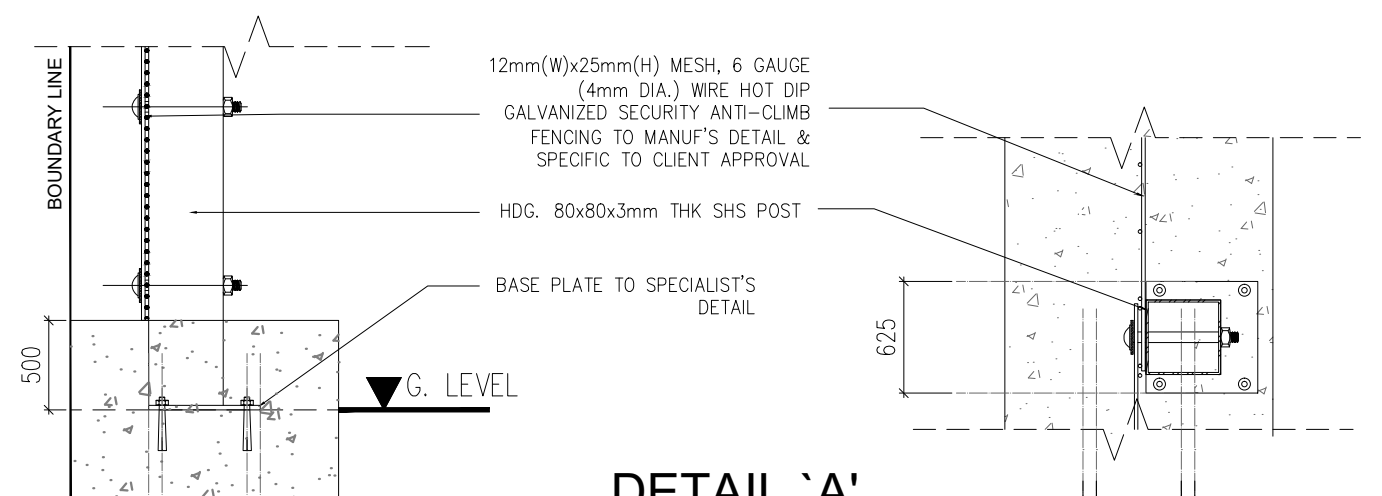
BOUNDARY LINE
12mm(W)x25mm(H) MESH, 6 GAUGE (4mm DIA.) WIRE HOT DIP GALVANIZED SECURITY ANTI-CLIMB FENCING TO MANUF'S DETAIL & SPECIFIC TO CLIENT APPROVAL
HDG. 80x80x3mm THK SHS POST
BASE PLATE TO SPECIALIST'S DETAIL
G. LEVEL
500
475
75
625

DETAIL `A'
SCALE 1:10

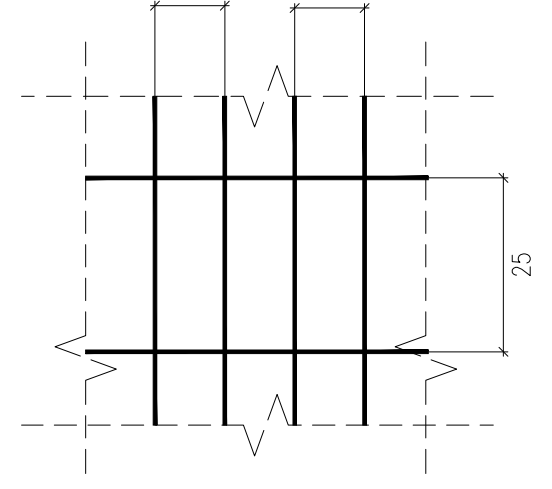

DETAIL `B'
SCALE : NTS

FENDER PILE DETAILS

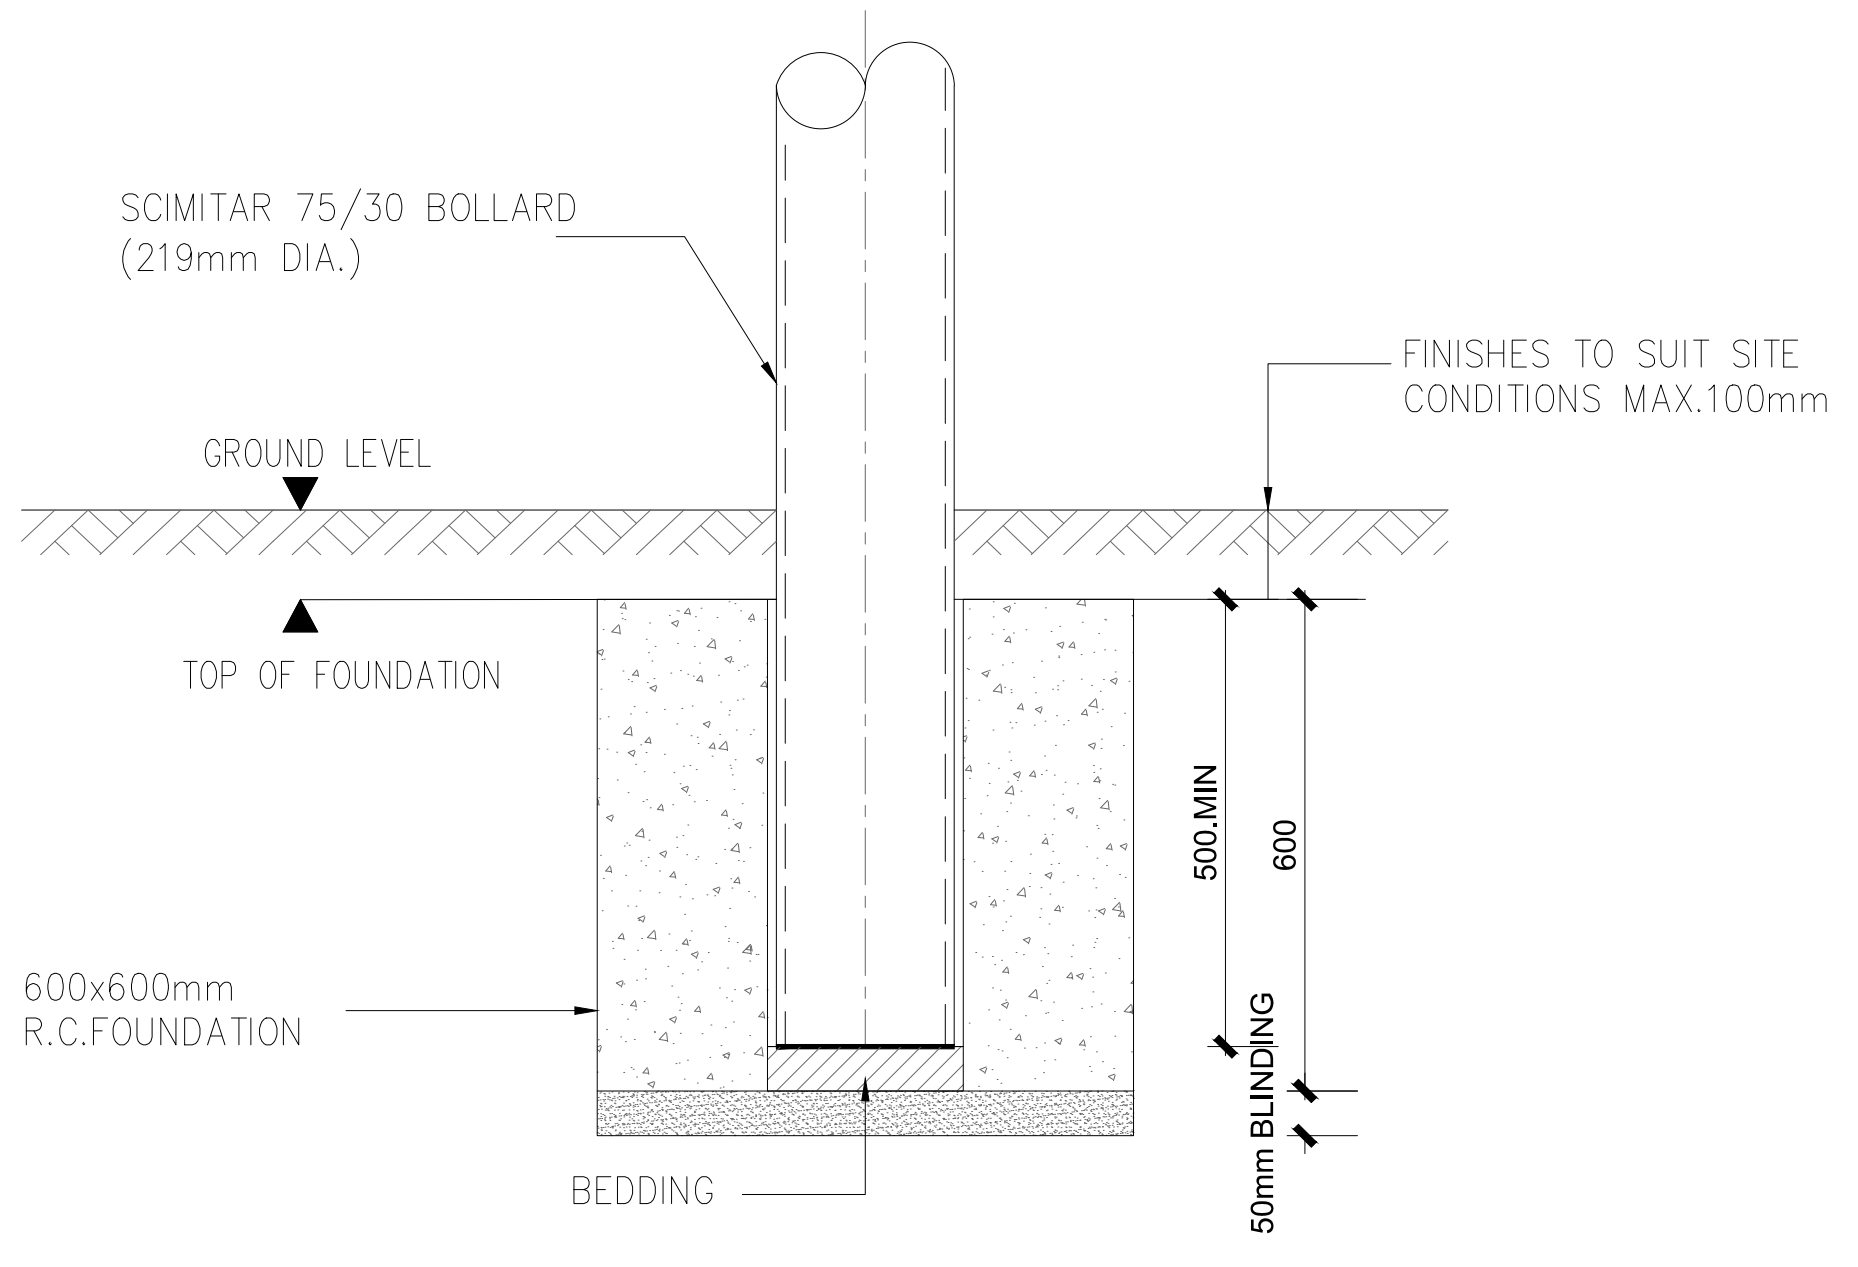

SECTION
SCALE 1:10

TYPICAL SECURITY WALL CONSTRUCTION DETAILS

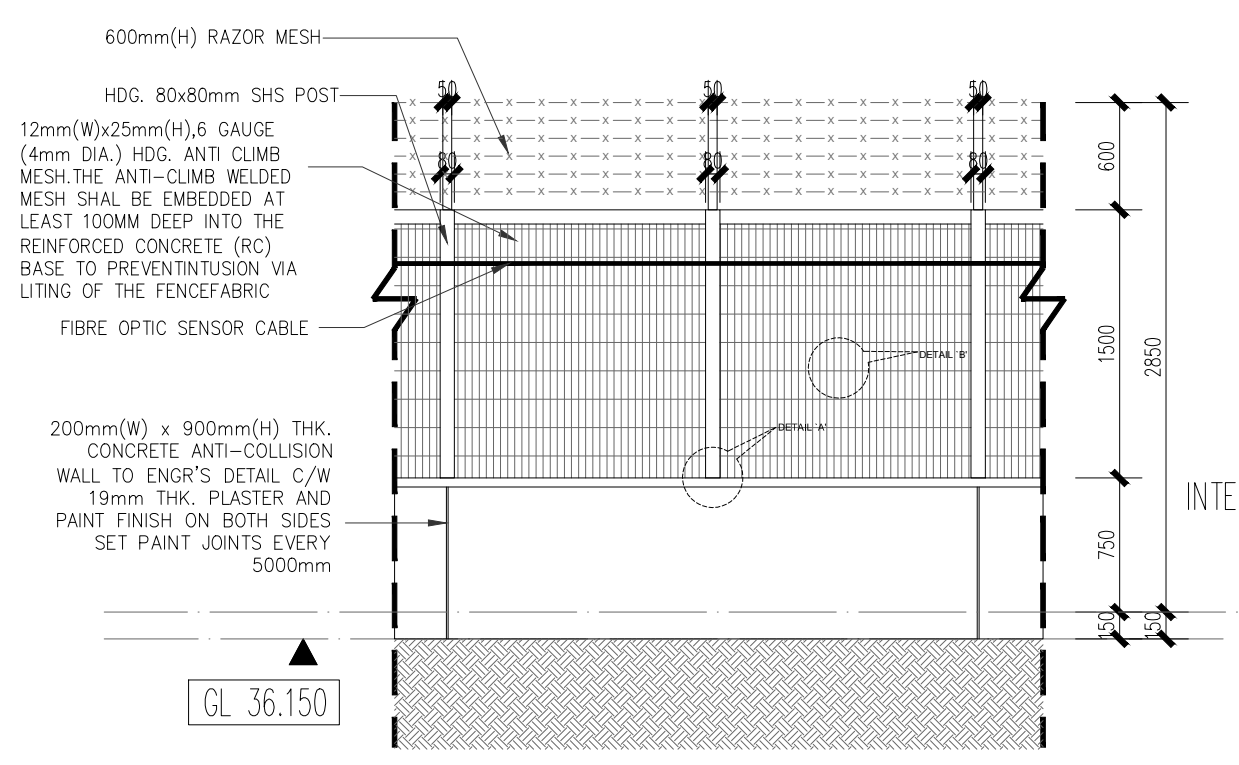
600mm(H) RAZOR MESH
HDG. 80x80mm SHS POST
12mm(W)x25mm(H),6 GAUGE (4mm DIA.) HDG. ANTI CLIMB MESH.THE ANTI-CLIMB WELDED MESH SHAL BE EMBEDDED AT LEAST 100MM DEEP INTO THE REINFORCED CONCRETE (RC) BASE TO PREVENTINTUSION VIA LITING OF THE FENCEFABRIC
FIBRE OPTIC SENSOR CABLE
200mm(W) x 900mm(H) THK. CONCRETE ANTI-COLLISION WALL TO ENGR'S DETAIL C/W 19mm THK. PLASTER AND PAINT FINISH ON BOTH SIDES SET PAINT JOINTS EVERY 5000mm
DETAIL 'B'
DETAIL 'A'
GL 36.150
600
1500
750
150
2850

ELEVATION E1
SCALE 1:50

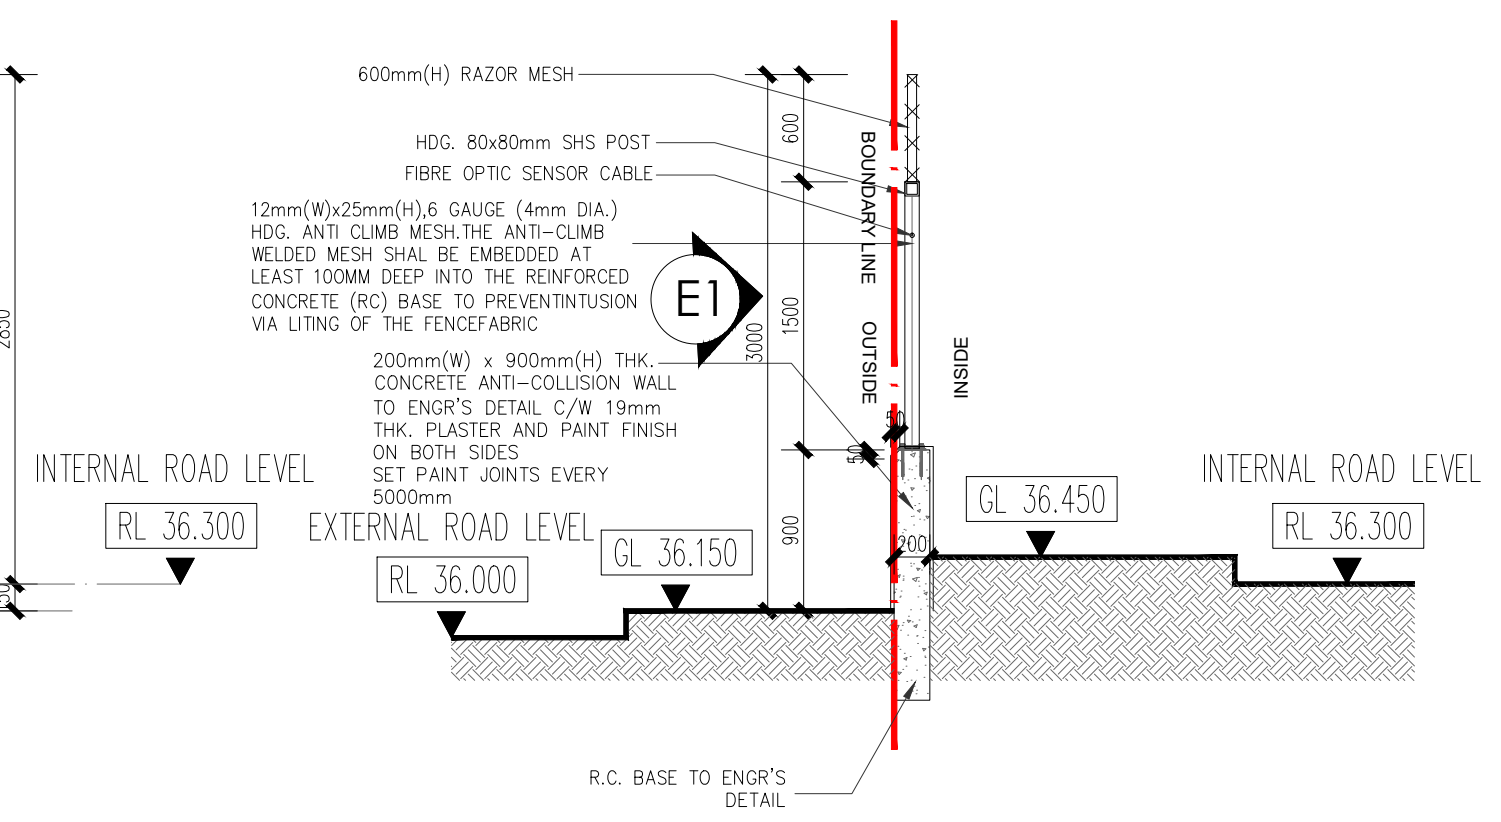
INTERNAL ROAD LEVEL
RL 36.300
600mm(H) RAZOR MESH
HDG. 80x80mm SHS POST
FIBRE OPTIC SENSOR CABLE
12mm(W)x25mm(H),6 GAUGE (4mm DIA.) HDG. ANTI CLIMB MESH.THE ANTI-CLIMB WELDED MESH SHAL BE EMBEDDED AT LEAST 100MM DEEP INTO THE REINFORCED CONCRETE (RC) BASE TO PREVENTINTUSION VIA LITING OF THE FENCEFABRIC
200mm(W) x 900mm(H) THK. CONCRETE ANTI-COLLISION WALL TO ENGR'S DETAIL C/W 19mm THK. PLASTER AND PAINT FINISH ON BOTH SIDES SET PAINT JOINTS EVERY 5000mm
E1
BOUNDARY LINE
OUTSIDE
INSIDE
EXTERNAL ROAD LEVEL
RL 36.000
GL 36.150
GL 36.450
INTERNAL ROAD LEVEL
RL 36.300
R.C. BASE TO ENGR'S DETAIL
600
1500
900
3000
200

SECTION S1-S1
SCALE 1:50

TYPE A TYPE L-Q FENCING

TYPICAL SECURITY WALL CONSTRUCTION DETAILS

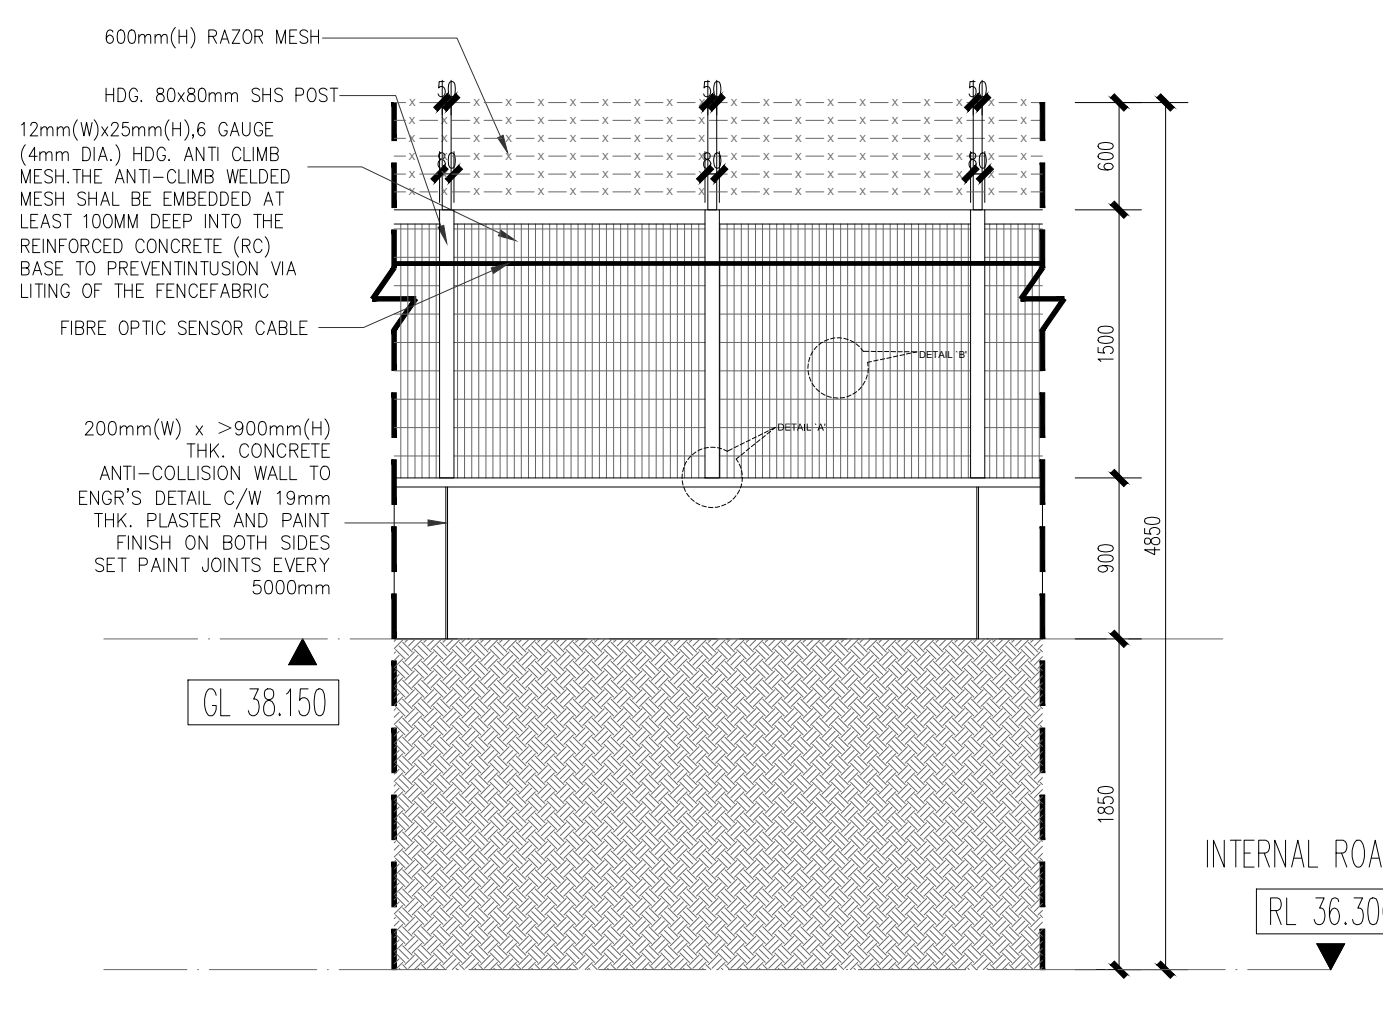
600mm(H) RAZOR MESH
HDG. 80x80mm SHS POST
12mm(W)x25mm(H),6 GAUGE (4mm DIA.) HDG. ANTI CLIMB MESH.THE ANTI-CLIMB WELDED MESH SHAL BE EMBEDDED AT LEAST 100MM DEEP INTO THE REINFORCED CONCRETE (RC) BASE TO PREVENTINTUSION VIA LITING OF THE FENCEFABRIC
FIBRE OPTIC SENSOR CABLE
200mm(W) x >900mm(H) THK. CONCRETE ANTI-COLLISION WALL TO ENGR'S DETAIL C/W 19mm THK. PLASTER AND PAINT FINISH ON BOTH SIDES SET PAINT JOINTS EVERY 5000mm
DETAIL 'B'
DETAIL 'A'
GL 38.150
INTERNAL ROAD LEVEL
RL 36.300
600
1500
900
1850
4850

ELEVATION E4
SCALE 1:50

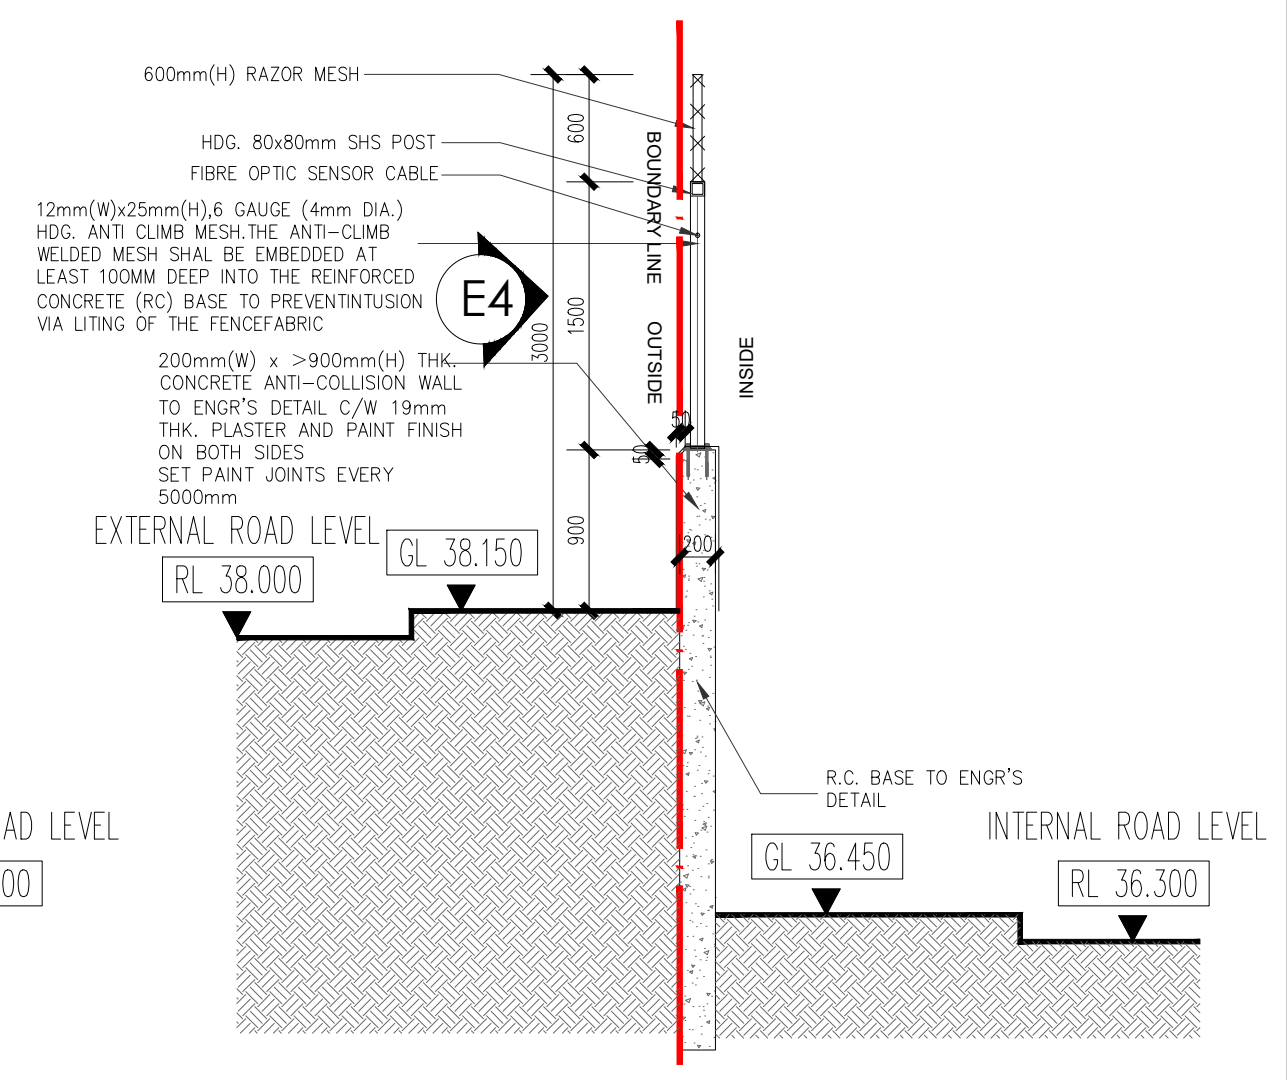
600mm(H) RAZOR MESH
HDG. 80x80mm SHS POST
FIBRE OPTIC SENSOR CABLE
12mm(W)x25mm(H),6 GAUGE (4mm DIA.) HDG. ANTI CLIMB MESH.THE ANTI-CLIMB WELDED MESH SHAL BE EMBEDDED AT LEAST 100MM DEEP INTO THE REINFORCED CONCRETE (RC) BASE TO PREVENTINTUSION VIA LITING OF THE FENCEFABRIC
200mm(W) x >900mm(H) THK. CONCRETE ANTI-COLLISION WALL TO ENGR'S DETAIL C/W 19mm THK. PLASTER AND PAINT FINISH ON BOTH SIDES SET PAINT JOINTS EVERY 5000mm
E4
BOUNDARY LINE
OUTSIDE
INSIDE
EXTERNAL ROAD LEVEL
RL 38.000
GL 38.150
R.C. BASE TO ENGR'S DETAIL
GL 36.450
INTERNAL ROAD LEVEL
RL 36.300
600
1500
900
3000
200

SECTION S4-S4
SCALE 1:50

TYPE B-K FENCING

TYPICAL SECURITY WALL CONSTRUCTION DETAILS

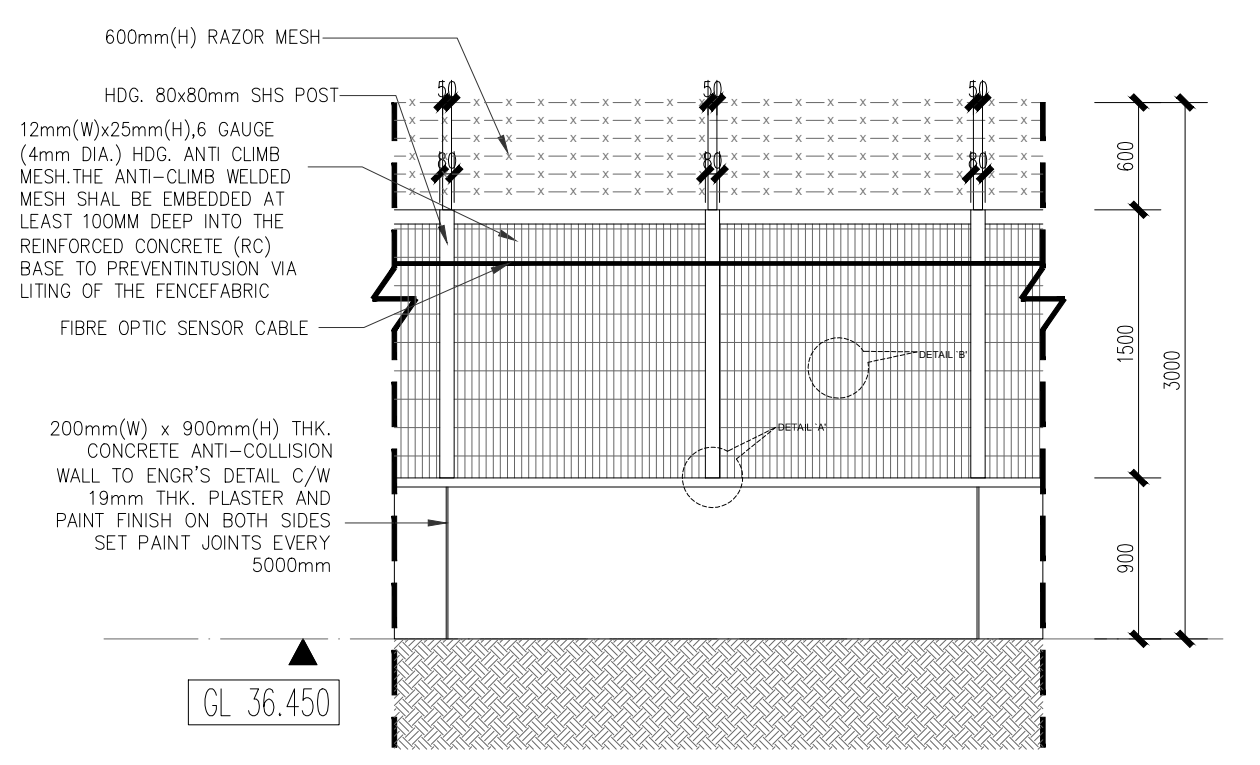
600mm(H) RAZOR MESH
HDG. 80x80mm SHS POST
12mm(W)x25mm(H),6 GAUGE (4mm DIA.) HDG. ANTI CLIMB MESH.THE ANTI-CLIMB WELDED MESH SHAL BE EMBEDDED AT LEAST 100MM DEEP INTO THE REINFORCED CONCRETE (RC) BASE TO PREVENTINTUSION VIA LITING OF THE FENCEFABRIC
FIBRE OPTIC SENSOR CABLE
200mm(W) x 900mm(H) THK. CONCRETE ANTI-COLLISION WALL TO ENGR'S DETAIL C/W 19mm THK. PLASTER AND PAINT FINISH ON BOTH SIDES SET PAINT JOINTS EVERY 5000mm
DETAIL 'B'
DETAIL 'A'
GL 36.450
600
1500
900
3000

ELEVATION E3
SCALE 1:50

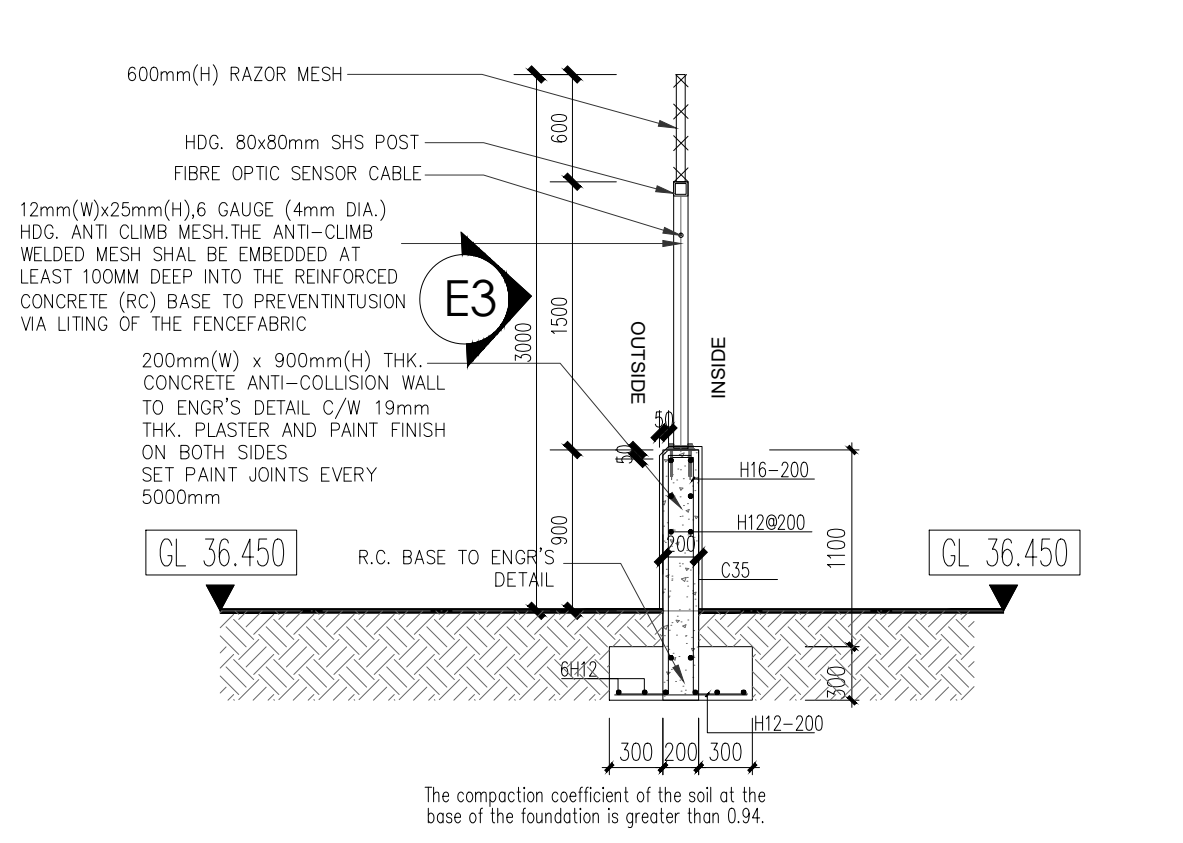
600mm(H) RAZOR MESH
HDG. 80x80mm SHS POST
FIBRE OPTIC SENSOR CABLE
12mm(W)x25mm(H),6 GAUGE (4mm DIA.) HDG. ANTI CLIMB MESH.THE ANTI-CLIMB WELDED MESH SHAL BE EMBEDDED AT LEAST 100MM DEEP INTO THE REINFORCED CONCRETE (RC) BASE TO PREVENTINTUSION VIA LITING OF THE FENCEFABRIC
200mm(W) x 900mm(H) THK. CONCRETE ANTI-COLLISION WALL TO ENGR'S DETAIL C/W 19mm THK. PLASTER AND PAINT FINISH ON BOTH SIDES SET PAINT JOINTS EVERY 5000mm
E3
OUTSIDE
INSIDE
GL 36.450
R.C. BASE TO ENGR'S DETAIL
H16-200
H12@200
C35
6H12
H12-200
300 200 300
1100
300
600
1500
900
3000
200

The compaction coefficient of the soil at the base of the foundation is greater than 0.94.

SECTION S3-S3
SCALE 1:50

TYPE R FENCING

TEMPORARY FENCE DETAILS

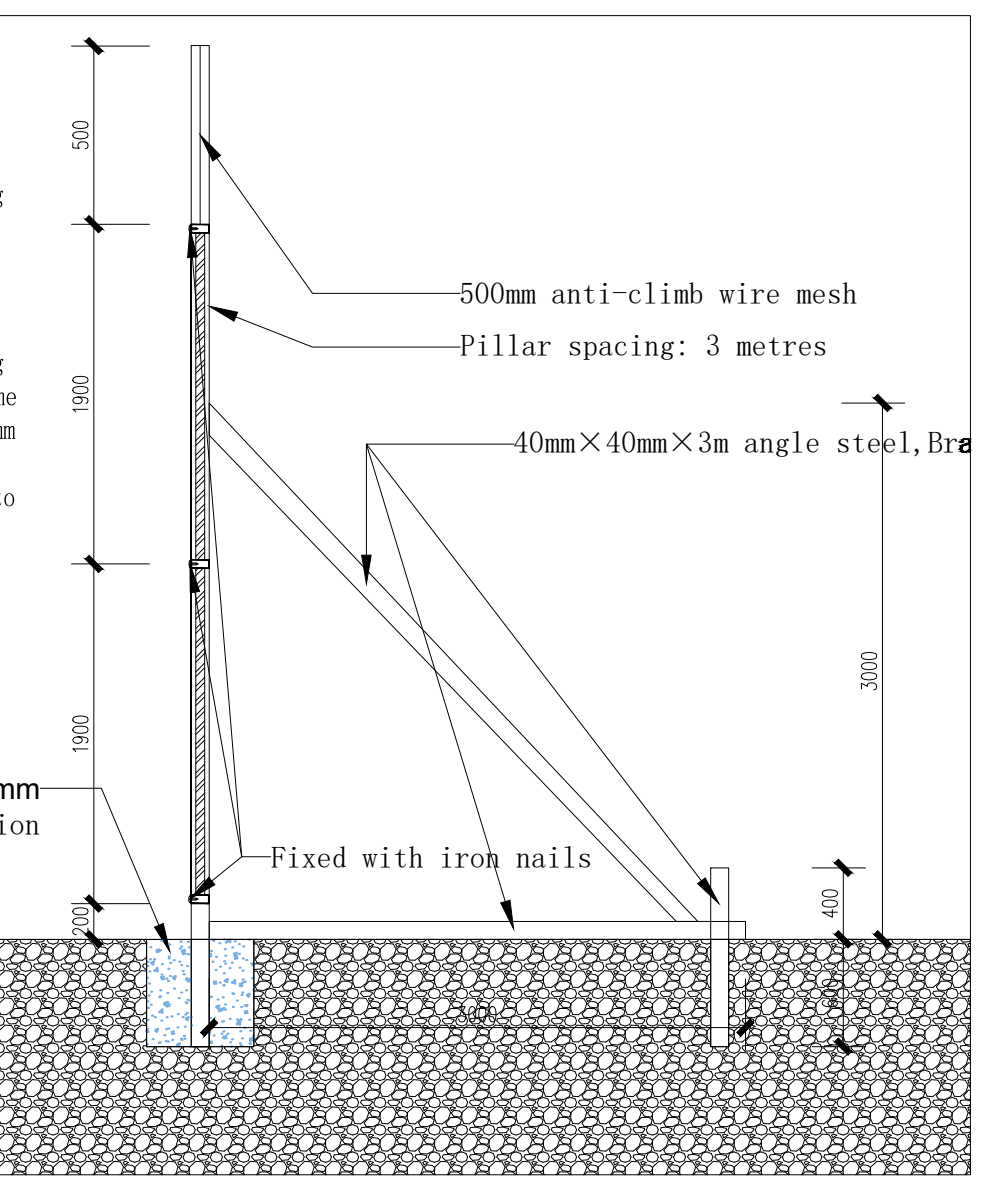
500mm anti-climb wire mesh
Pillar spacing: 3 metres
40mm×40mm×3m angle steel,Bra
300mm*300mm*300mm Concrete foundation
Fixed with iron nails
500
1900
1900
200
3000
400
600
3000

Description:
The frame uprights are fabricated from 50mm x 50mm x 1.2mm steel tubing welded together; horizontal rails and partition uprights are fabricated from 50mm x 25mm x 1.2mm steel tubing welded together. The frame surface is clad with 0.3mm thick color-coated steel sheet, which is secured to the steel tubing frame using nails.

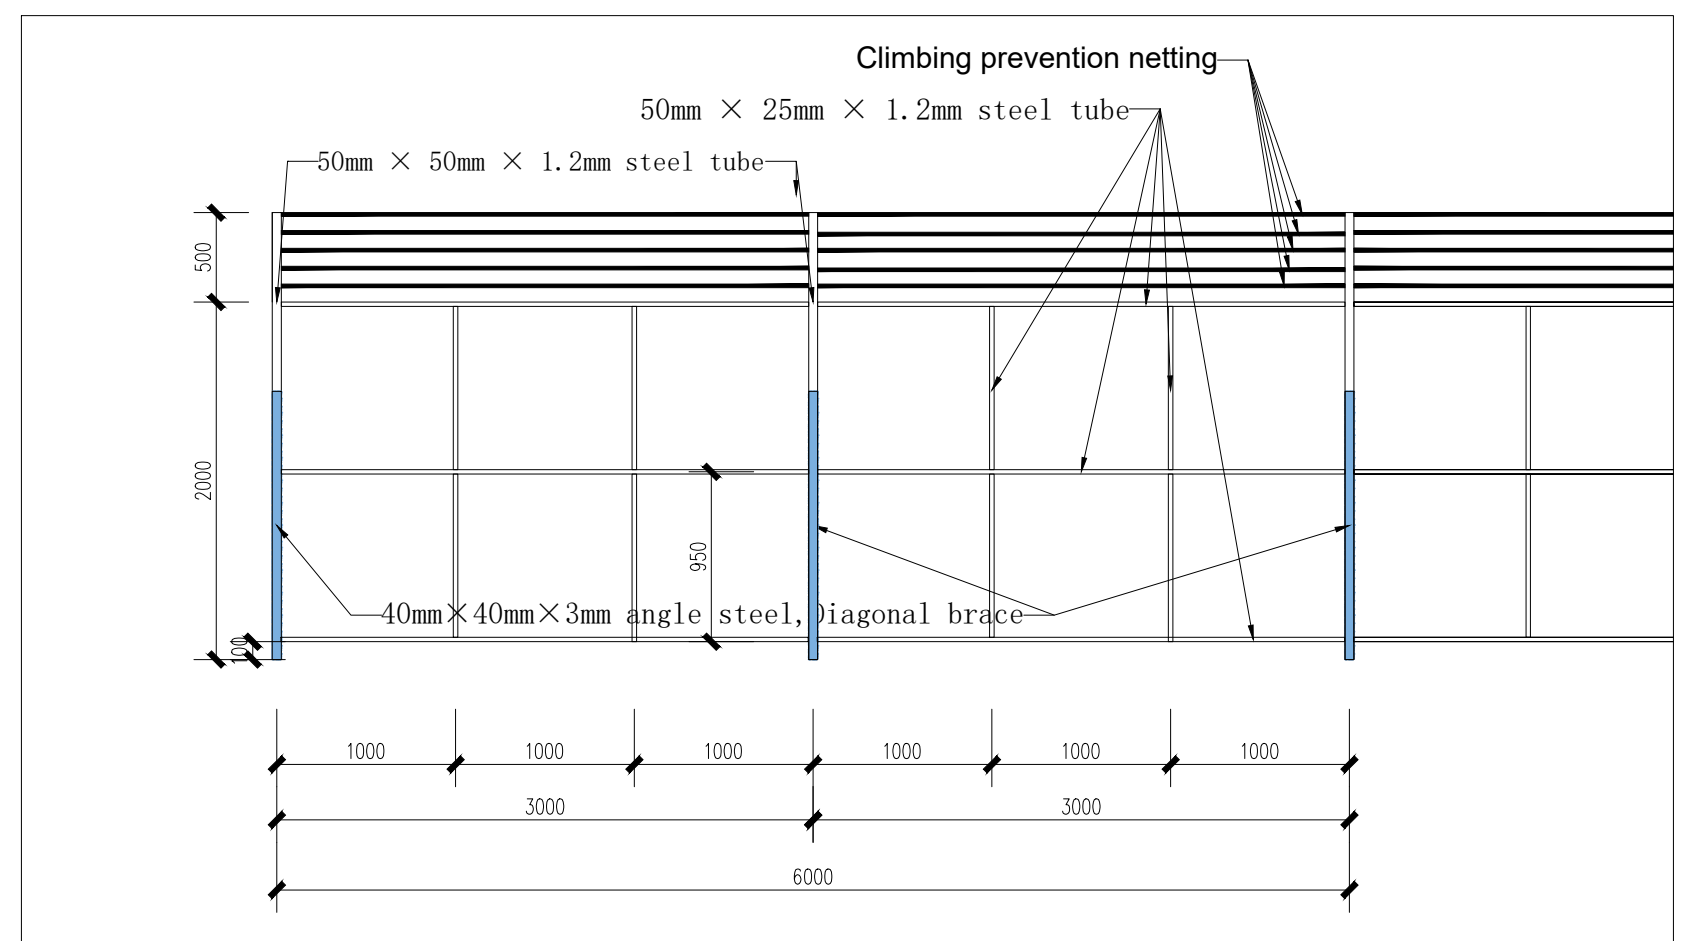
Climbing prevention netting
50mm × 25mm × 1.2mm steel tube
50mm × 50mm × 1.2mm steel tube
40mm×40mm×3mm angle steel,Diagonal brace
500
2000
950
100
1000
1000
1000
1000
1000
1000
3000
3000
6000

Fence Elevation Drawing

Detailed Drawing of Barrier Fencing

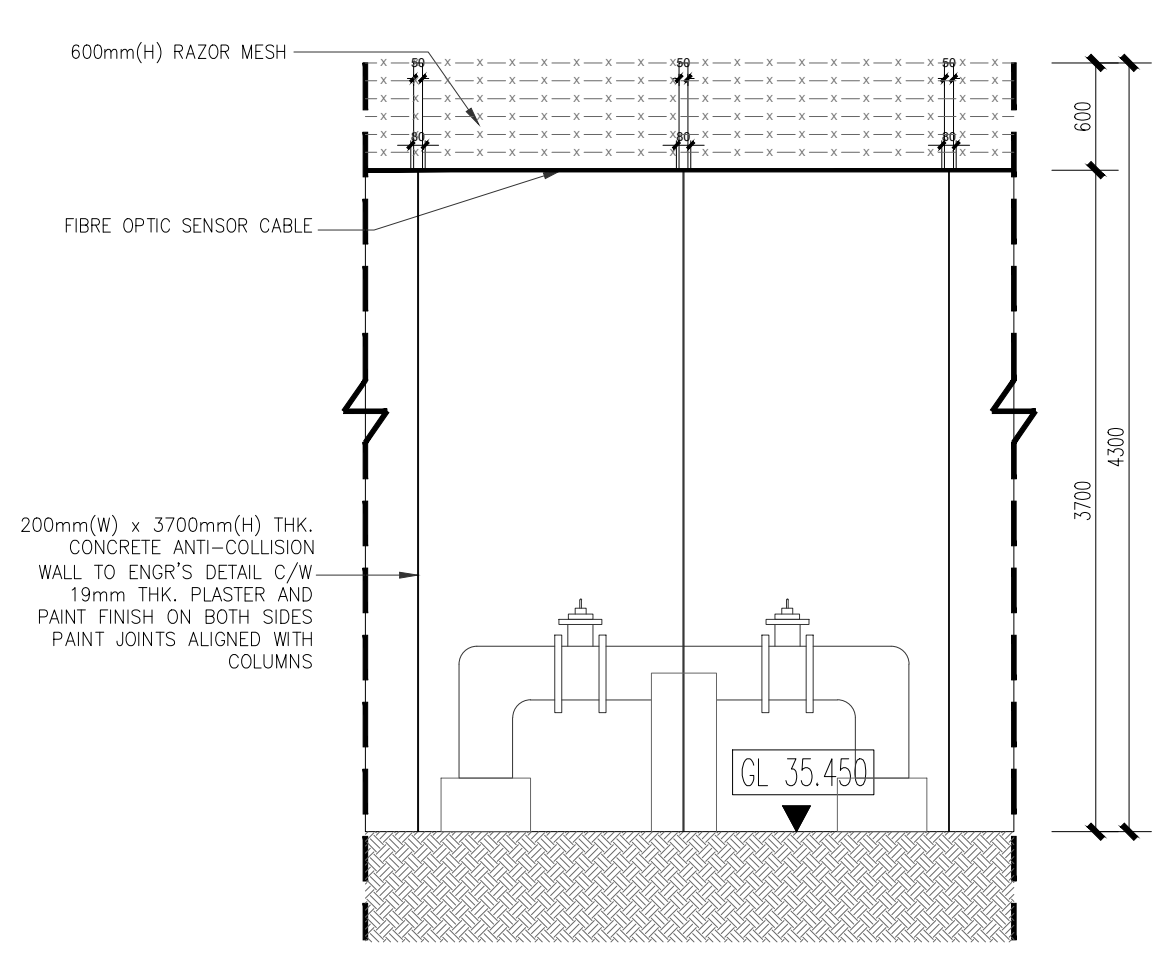
600mm(H) RAZOR MESH
FIBRE OPTIC SENSOR CABLE
200mm(W) x 3700mm(H) THK. CONCRETE ANTI-COLLISION WALL TO ENGR'S DETAIL C/W 19mm THK. PLASTER AND PAINT FINISH ON BOTH SIDES PAINT JOINTS ALIGNED WITH COLUMNS
GL 35.450
600
3700
4300

ELEVATION E5
SCALE 1:50

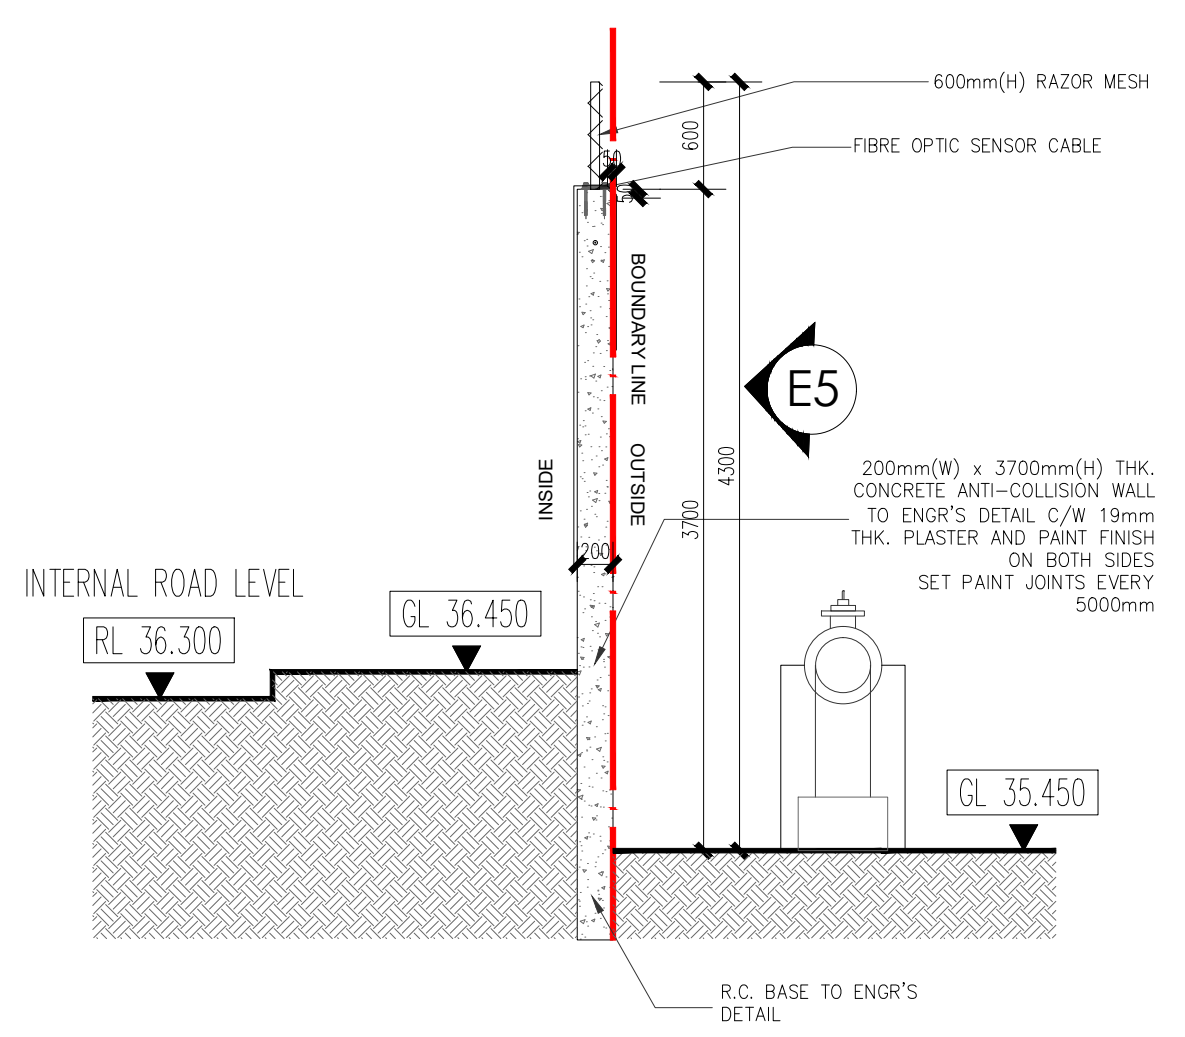
600mm(H) RAZOR MESH
FIBRE OPTIC SENSOR CABLE
BOUNDARY LINE
INSIDE
OUTSIDE
E5
200mm(W) x 3700mm(H) THK. CONCRETE ANTI-COLLISION WALL TO ENGR'S DETAIL C/W 19mm THK. PLASTER AND PAINT FINISH ON BOTH SIDES SET PAINT JOINTS EVERY 5000mm
INTERNAL ROAD LEVEL
RL 36.300
GL 36.450
GL 35.450
R.C. BASE TO ENGR'S DETAIL
600
3700
4300
200

SECTION S5-S5
SCALE 1:50

TYPE S FENCING

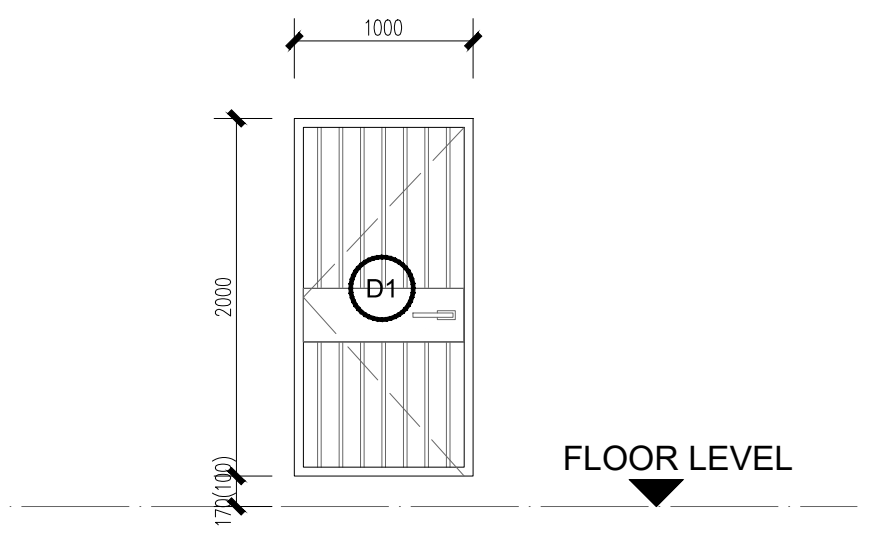

D1

TYPE	STEEL SINGLE DOOR, SINGLE SWING FOR FIRE EXIT
FRAME	1.6mm THK. GALVANIZED STEEL FRAME
PANEL	1.6mm THK.GALVANIZED STEEL
HINCE	BALL BEARING
HANDLE	DOOR CLOSER
LOCK	KEY

Note:
Exterior Glazing Performance(all door & window):
--SHGC=0.5 or better
--U-value =5.25 W/(m2K) or better

NOTE : THIS PRINT IS OF A CONFIDENTIAL NATURE, IT SHALL NOT BE TRACED,PHOTOGRAPHED,PHOTOSTATED OR REPRODUCED IN ANY MANER,NOR USED FOR ANY PURPOSE WHATSOEVER EXCEPT BY WRITTEN PERMISSION

CLIENT :
GULF EDGE DC 01
87 Wireless Road, M Thai Tower 11th. Floor, All Seasons Place, Lumpini,
Pathumwan, Bangkok 10330, Thailand

CONTRACTOR :
华西发展(泰国)有限公司
บริษัท หัวซือ ดีเวลลอปเม้นต์ (ประเทศไทย) จำกัด
HUASHI DEVELOPMENT CO.,LTD
No. 202, Room No. 1403, 14/F, Le Concorde Building,
Ratchadapisek Road, Huaykhwang Sub-District,
Huaykhwang District, Bangkok Metropolitan 10310.

CONSULTANT :
ARbay
บริษัท เอ อาร์ เบย์ จำกัด
ARbay Company Limited
31 st Floor Bangkok Insurance Building
25 South Sathorn road Thungmahamek
Sathorn Bangkok 10120 THAILAND
T +66 (0) 2286 8199
F +66 (0) 2286 2863
info@arbay.co.th

CONSULTANT :
Qbic Engineers & Architects Co.,Ltd.
8 Soi KALONG 4 SANAMBINNAM ROAD,
THASAI SUB-DISTRICT, MUANG NONTHABURI DISTRICT
, NONTHABURI.
Tel 662-950-4374
Fax 662-580-3231
E-Mail : qbic@qbic.co.th, www.qbic.co.th
QBIC ENGINEERS AND ARCHITECTS CO.,LTD.

CONSULTANT :
MITR
MITR TECHNICAL CONSULTANT CO.,LTD.
1168/8 12th FLOOR, LUMPINI TOWER BUILDING,
RAMA IV RD., THUNGMAHAMEK, SATHORN, BANGKOK 10120, THAILAND
TEL : 0-2679-9079-84
FAX : 0-2679-9085 E-mail: mitr_dd@mitr.com

Architect :	SIGNATURE
ประกิต พนานุรัตน์ วสถ. 580 ที่อยู่ 251/1 ถ.จารุเมือง แขวงรองเมือง เขตปทุมวัน กรุงเทพมหานคร โทรศัพท์ 02-286-8199	
Structural Engineer :	SIGNATURE
วิศวกรผู้ออกแบบโครงสร้าง	
ณัฐสม สงวนวงษ์ วย 1423 ที่อยู่ 2/1 ซ.รามคำแหง 150 ถ.รามคำแหง แขวง สะพานสูง เขต สะพานสูง กทม. 10240	ณัฐสม สงวนวงษ์
Structural Inspector :	SIGNATURE
วิศวกรผู้ตรวจสอบโครงสร้าง	
โกมล จุฑาภัทร วย 964 ที่อยู่ 24/18 ซ.นวมินทร์ 129 ถ. นวมินทร์ แขวง นวลจันทร์ เขต บึงกุ่ม กทม. 10230	
Electrical Engineer :	SIGNATURE
วิศวกรผู้ออกแบบระบบไฟฟ้ากำลัง	
นายสุภัทร บูรณวิทย์ วฟก.1265 ที่อยู่ 21 ซอยทานสัมฤทธิ์ 13 ตำบลท่าทราย อ.เมืองนนทบุรี จ.นนทบุรี 11000	
Mechanical Engineer :	SIGNATURE
วิศวกรผู้ออกแบบระบบเครื่องกลและปรับอากาศ	
นายประสิทธิ์ เกียวสุนทร วก.1221 ที่อยู่ 44/372 ซอยบางกระดี่ 35/1 แขวงแสมดำ เขตบางขุนเทียน กทม. 10150	ประสิทธิ์
Sanitary Engineer :	SIGNATURE
วิศวกรผู้ออกแบบระบบสุขาภิบาล และดับเพลิง	
นายทศวรรษ สันนฤทธิ์ วส. 215 ที่อยู่ บ้านเลขที่ 99/107 หมู่ที่ 3 ต.ศีรษะจรเข้น้อย อ.บางเสาธง จ.สมุทรปราการ 10540	ทศวรรษ

ISSUE/REVISION

REV.	DESCRIPTION	DATE
A	90% DEVELOPED	09/05/2026

PROJECT NAME :
GEDC 01

LOCATION:
Nikhom Phattana district, Rayong ,industrial estate,CPGC

BUILDING :
SITE PLAN

90% DEVELOPED

TITLE :
TYPICAL DETAILS

JOB NO.	SCALE 1:50
DRAWN HJC	REF.
CHECKED LJC	DWG.NO. MPK00-90-A-TD-001
APPROVED LXD	
DATE 2026.05.09	