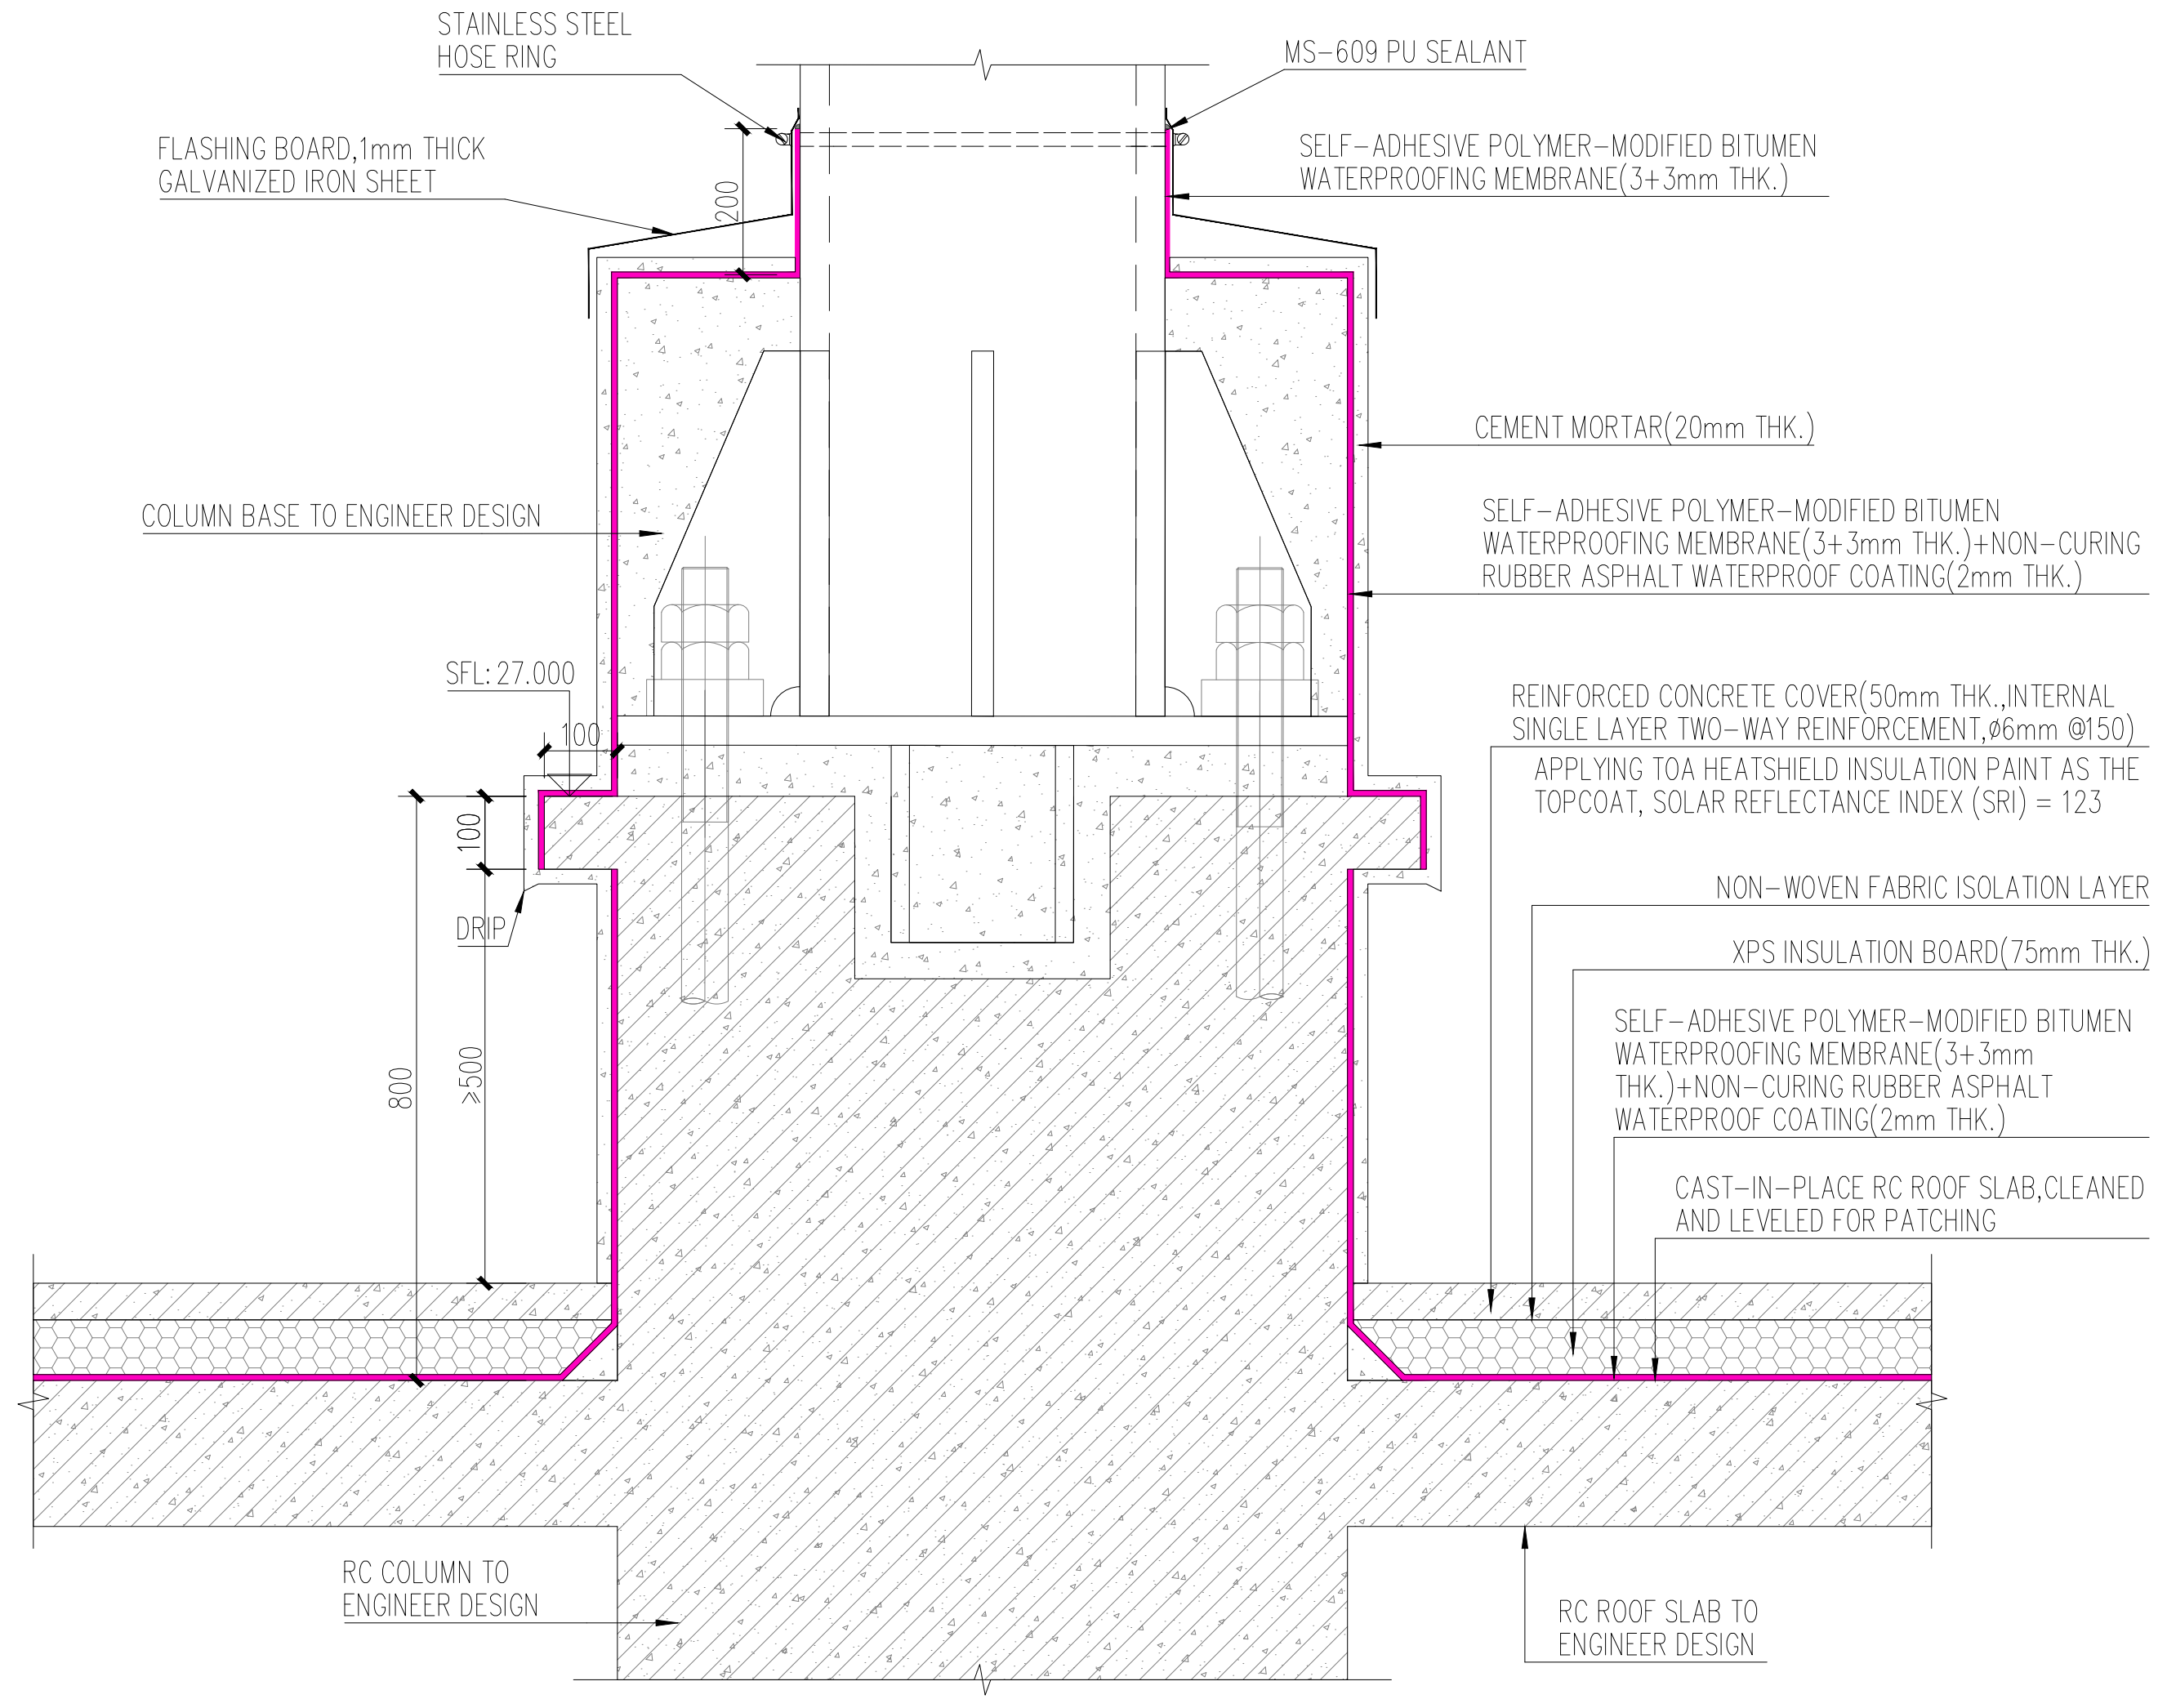
STAINLESS STEEL
HOSE RING
MS-609 PU SEALANT
FLASHING BOARD,1mm THICK
GALVANIZED IRON SHEET
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN
WATERPROOFING MEMBRANE(3+3mm THK.)
200
CEMENT MORTAR(20mm THK.)
COLUMN BASE TO ENGINEER DESIGN
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN
WATERPROOFING MEMBRANE(3+3mm THK.)+NON-CURING
RUBBER ASPHALT WATERPROOF COATING(2mm THK.)
SFL: 27.000
100
REINFORCED CONCRETE COVER(50mm THK.,INTERNAL
SINGLE LAYER TWO-WAY REINFORCEMENT,ø6mm @150)
APPLYING TOA HEATSHIELD INSULATION PAINT AS THE
TOPCOAT, SOLAR REFLECTANCE INDEX (SRI) = 123
100
DRIP
NON-WOVEN FABRIC ISOLATION LAYER
XPS INSULATION BOARD(75mm THK.)
800
≥500
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN
WATERPROOFING MEMBRANE(3+3mm
THK.)+NON-CURING RUBBER ASPHALT
WATERPROOF COATING(2mm THK.)
CAST-IN-PLACE RC ROOF SLAB,CLEANED
AND LEVELED FOR PATCHING
RC COLUMN TO
ENGINEER DESIGN
RC ROOF SLAB TO
ENGINEER DESIGN

COLUMN BASE WATERPROOFING DETAIL
Scale 1:10

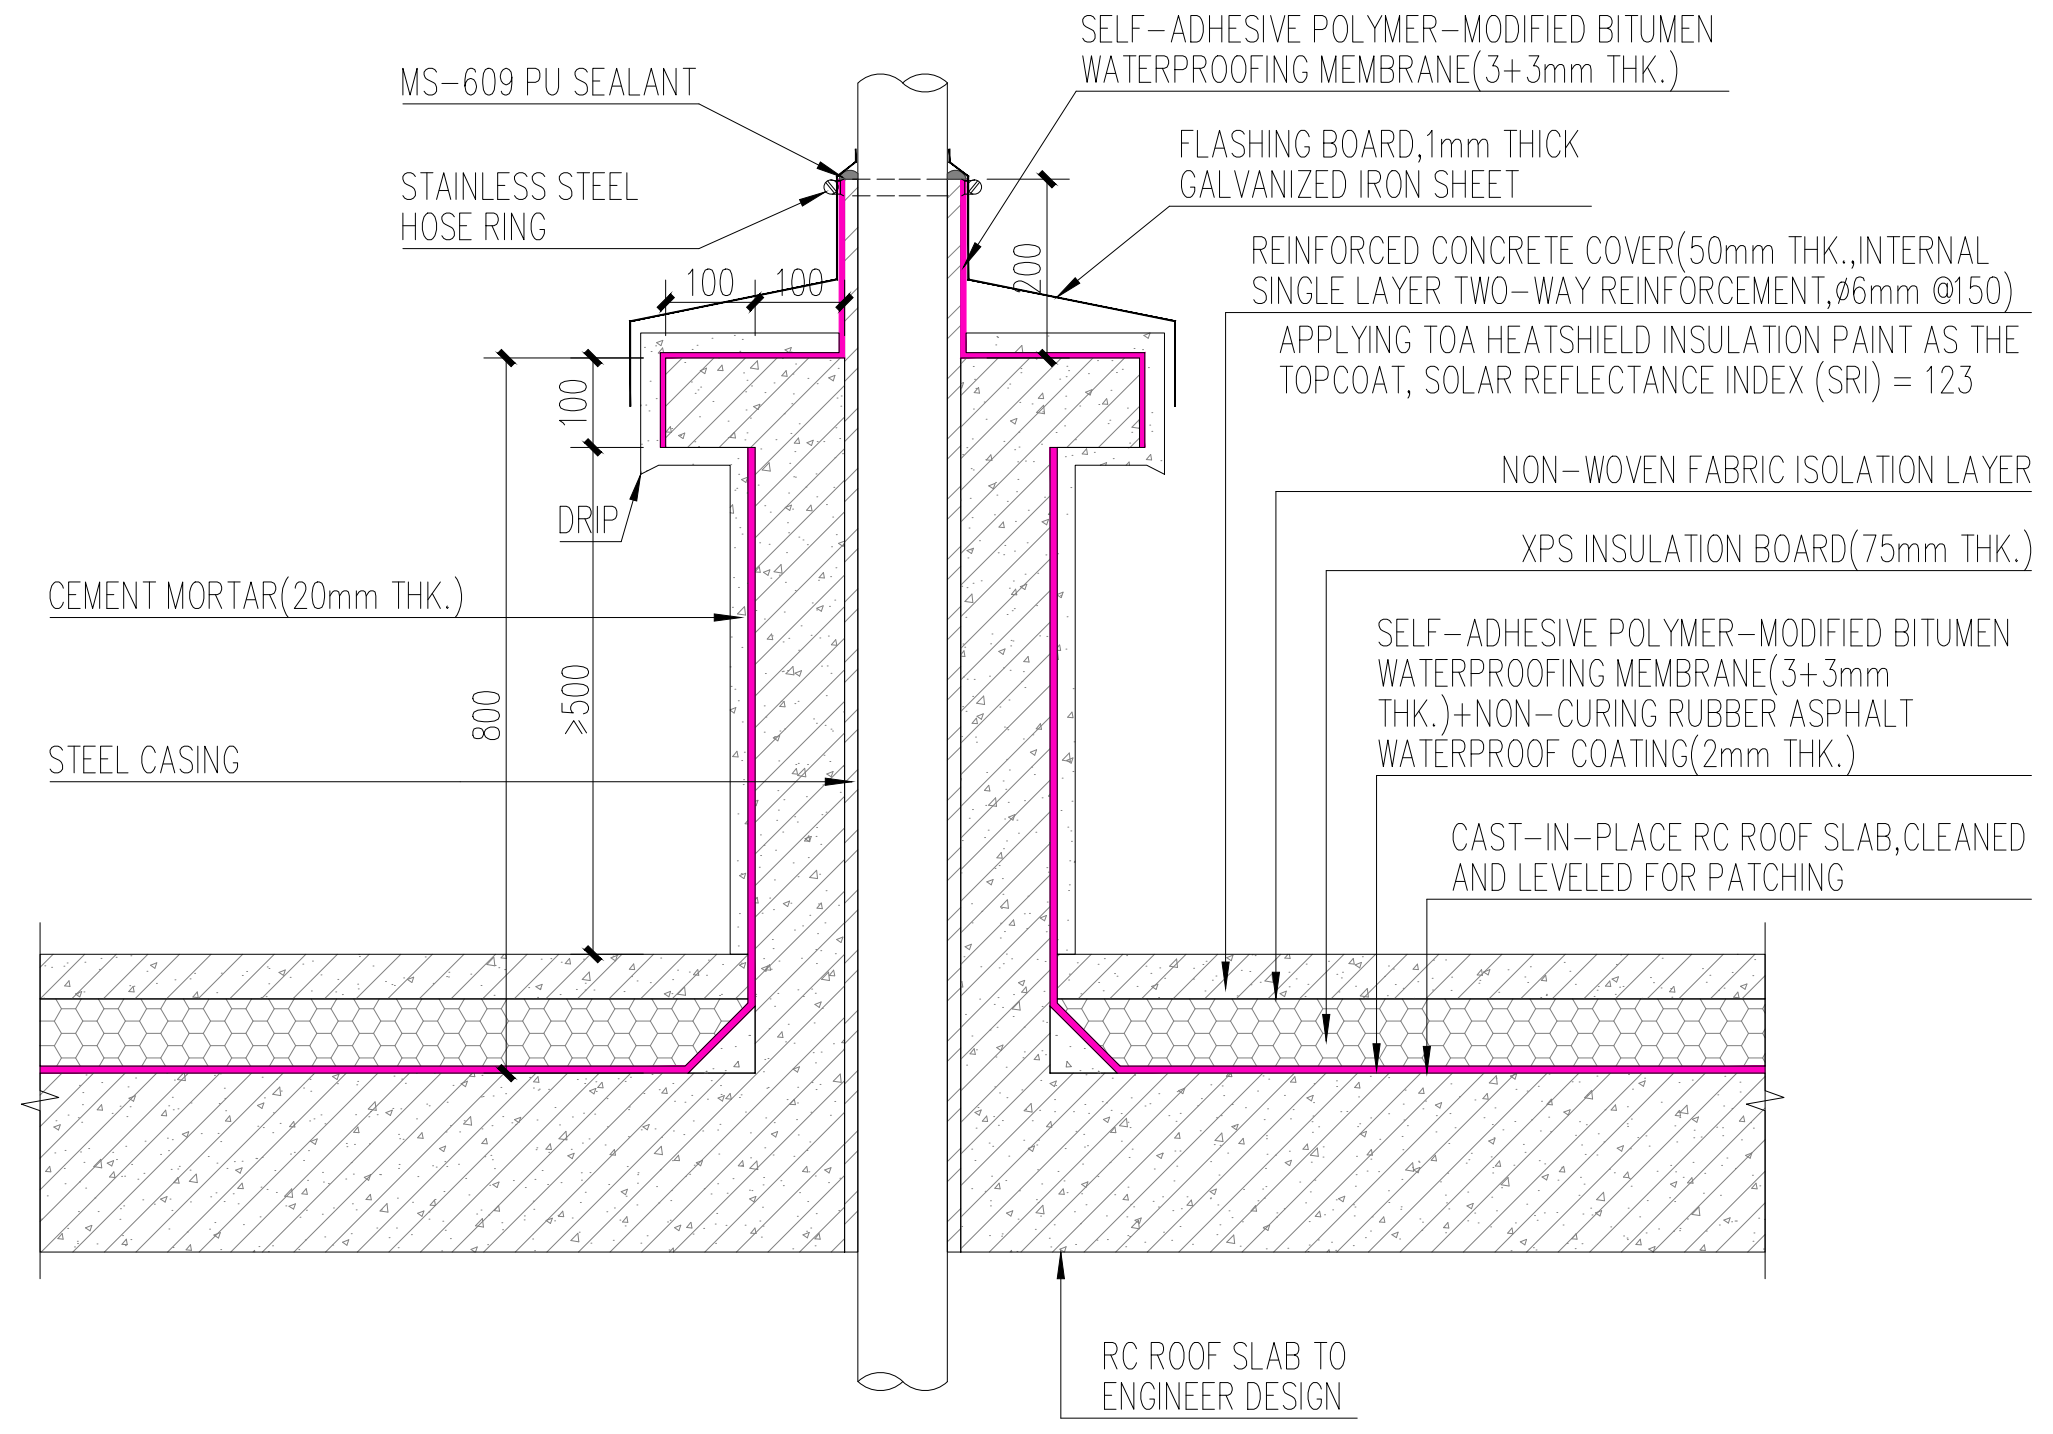
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN
WATERPROOFING MEMBRANE(3+3mm THK.)
MS-609 PU SEALANT
FLASHING BOARD,1mm THICK
GALVANIZED IRON SHEET
STAINLESS STEEL
HOSE RING
100
100
200
REINFORCED CONCRETE COVER(50mm THK.,INTERNAL
SINGLE LAYER TWO-WAY REINFORCEMENT,ø6mm @150)
APPLYING TOA HEATSHIELD INSULATION PAINT AS THE
TOPCOAT, SOLAR REFLECTANCE INDEX (SRI) = 123
100
DRIP
NON-WOVEN FABRIC ISOLATION LAYER
XPS INSULATION BOARD(75mm THK.)
CEMENT MORTAR(20mm THK.)
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN
WATERPROOFING MEMBRANE(3+3mm
THK.)+NON-CURING RUBBER ASPHALT
WATERPROOF COATING(2mm THK.)
800
≥500
STEEL CASING
CAST-IN-PLACE RC ROOF SLAB,CLEANED
AND LEVELED FOR PATCHING
RC ROOF SLAB TO
ENGINEER DESIGN

PIPES RUN THROUGH THE ROOF DETAIL
Scale 1:10

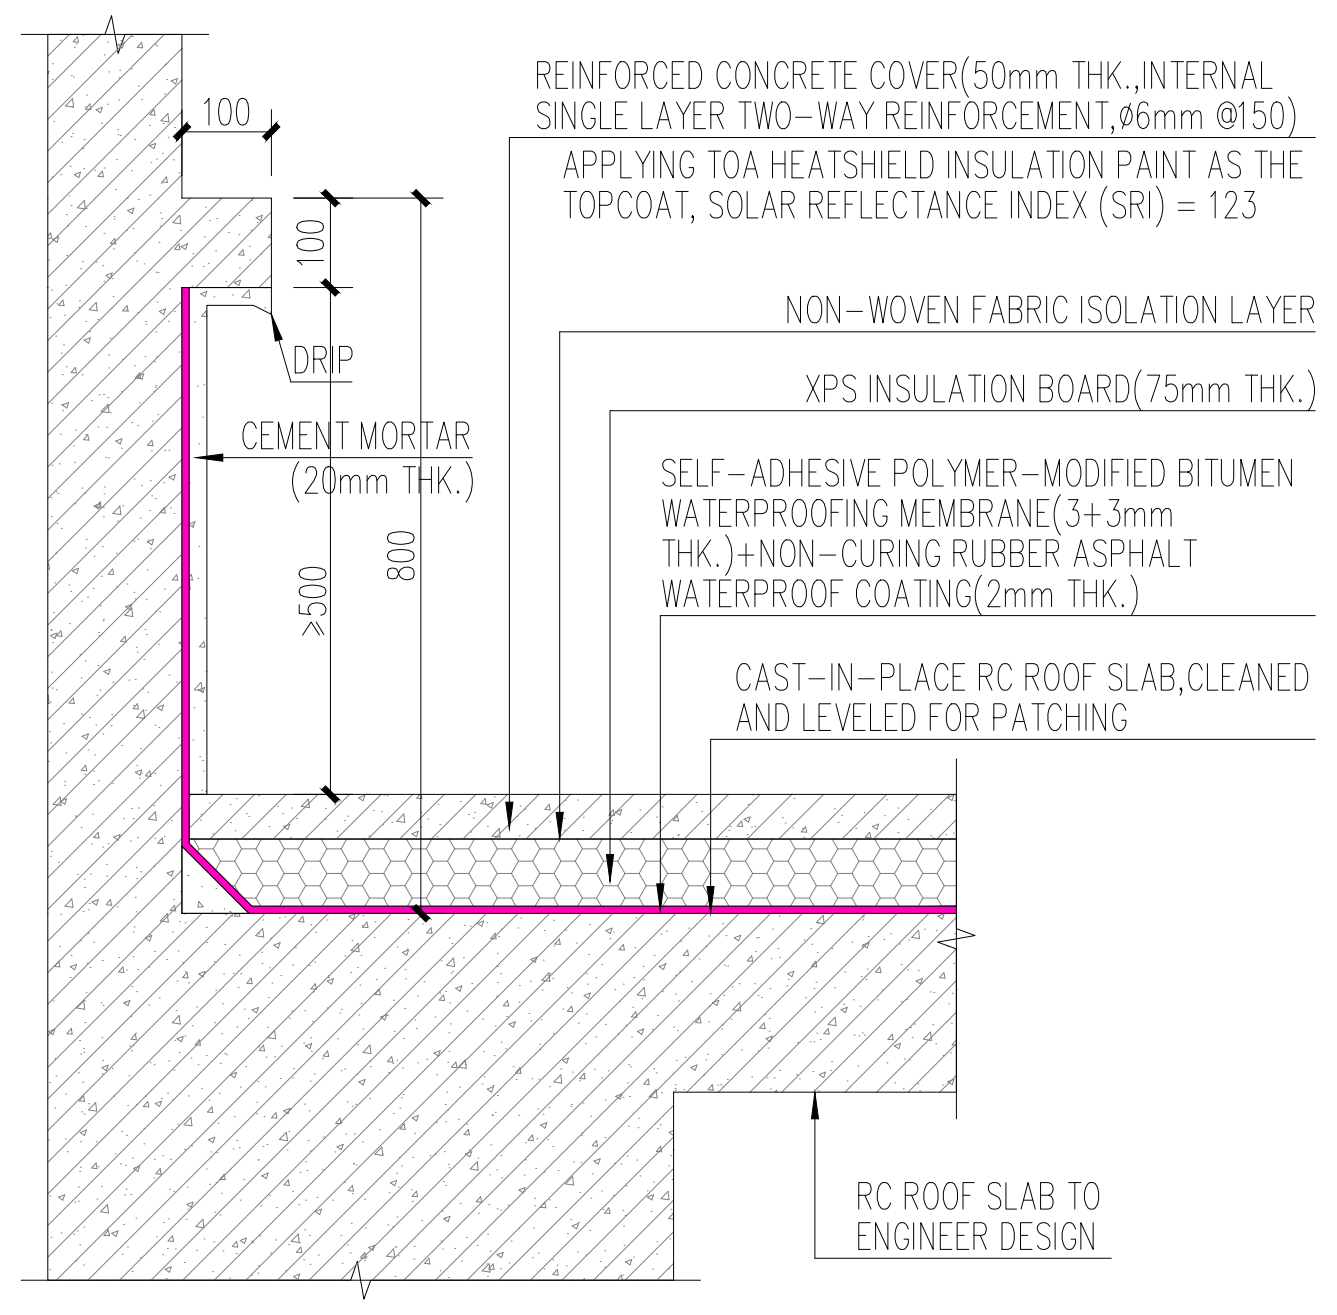
100
REINFORCED CONCRETE COVER(50mm THK.,INTERNAL
SINGLE LAYER TWO-WAY REINFORCEMENT,ø6mm @150)
APPLYING TOA HEATSHIELD INSULATION PAINT AS THE
TOPCOAT, SOLAR REFLECTANCE INDEX (SRI) = 123
100
DRIP
NON-WOVEN FABRIC ISOLATION LAYER
CEMENT MORTAR
(20mm THK.)
XPS INSULATION BOARD(75mm THK.)
≥500
800
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN
WATERPROOFING MEMBRANE(3+3mm
THK.)+NON-CURING RUBBER ASPHALT
WATERPROOF COATING(2mm THK.)
CAST-IN-PLACE RC ROOF SLAB,CLEANED
AND LEVELED FOR PATCHING
RC ROOF SLAB TO
ENGINEER DESIGN

GABLE PARAPET / EXTERIOR WALL WATERPROOFING DETAIL
Scale 1:10

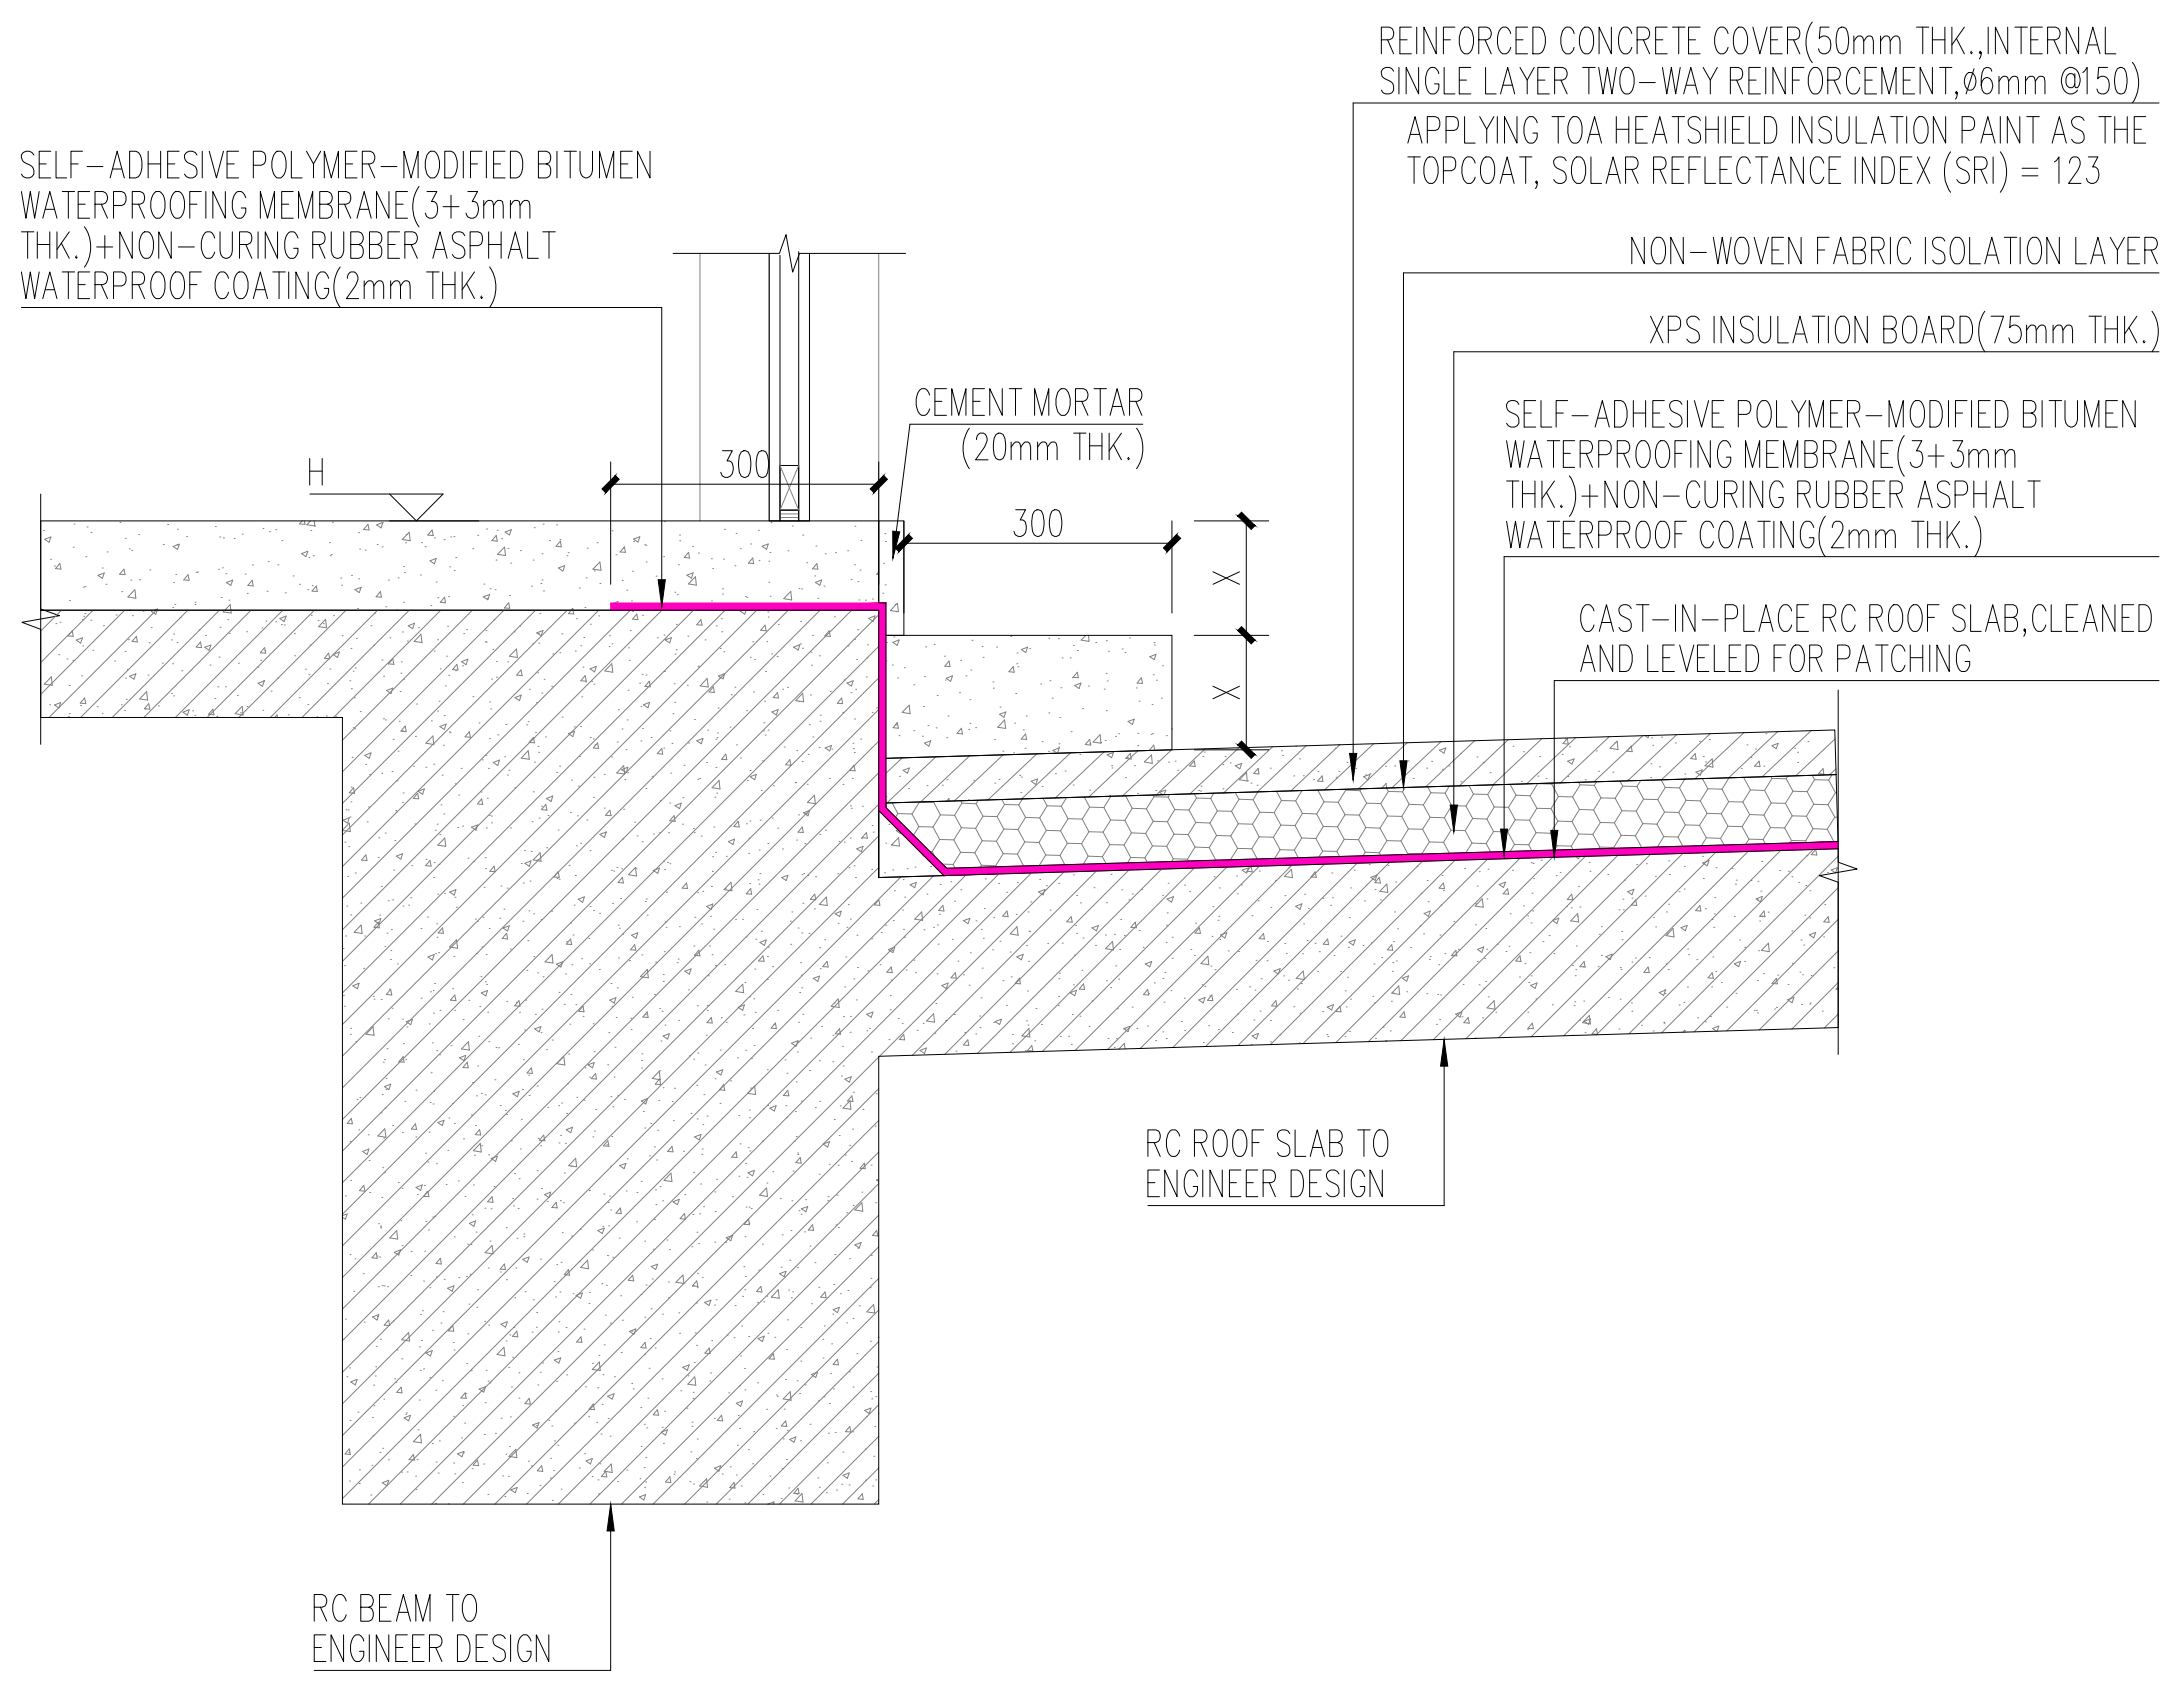
REINFORCED CONCRETE COVER(50mm THK.,INTERNAL
SINGLE LAYER TWO-WAY REINFORCEMENT,ø6mm @150)
APPLYING TOA HEATSHIELD INSULATION PAINT AS THE
TOPCOAT, SOLAR REFLECTANCE INDEX (SRI) = 123
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN
WATERPROOFING MEMBRANE(3+3mm
THK.)+NON-CURING RUBBER ASPHALT
WATERPROOF COATING(2mm THK.)
NON-WOVEN FABRIC ISOLATION LAYER
XPS INSULATION BOARD(75mm THK.)
CEMENT MORTAR
(20mm THK.)
H
300
300
X
X
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN
WATERPROOFING MEMBRANE(3+3mm
THK.)+NON-CURING RUBBER ASPHALT
WATERPROOF COATING(2mm THK.)
CAST-IN-PLACE RC ROOF SLAB,CLEANED
AND LEVELED FOR PATCHING
RC ROOF SLAB TO
ENGINEER DESIGN
RC BEAM TO
ENGINEER DESIGN

ROOF ACCESS DETAIL
Scale 1:10

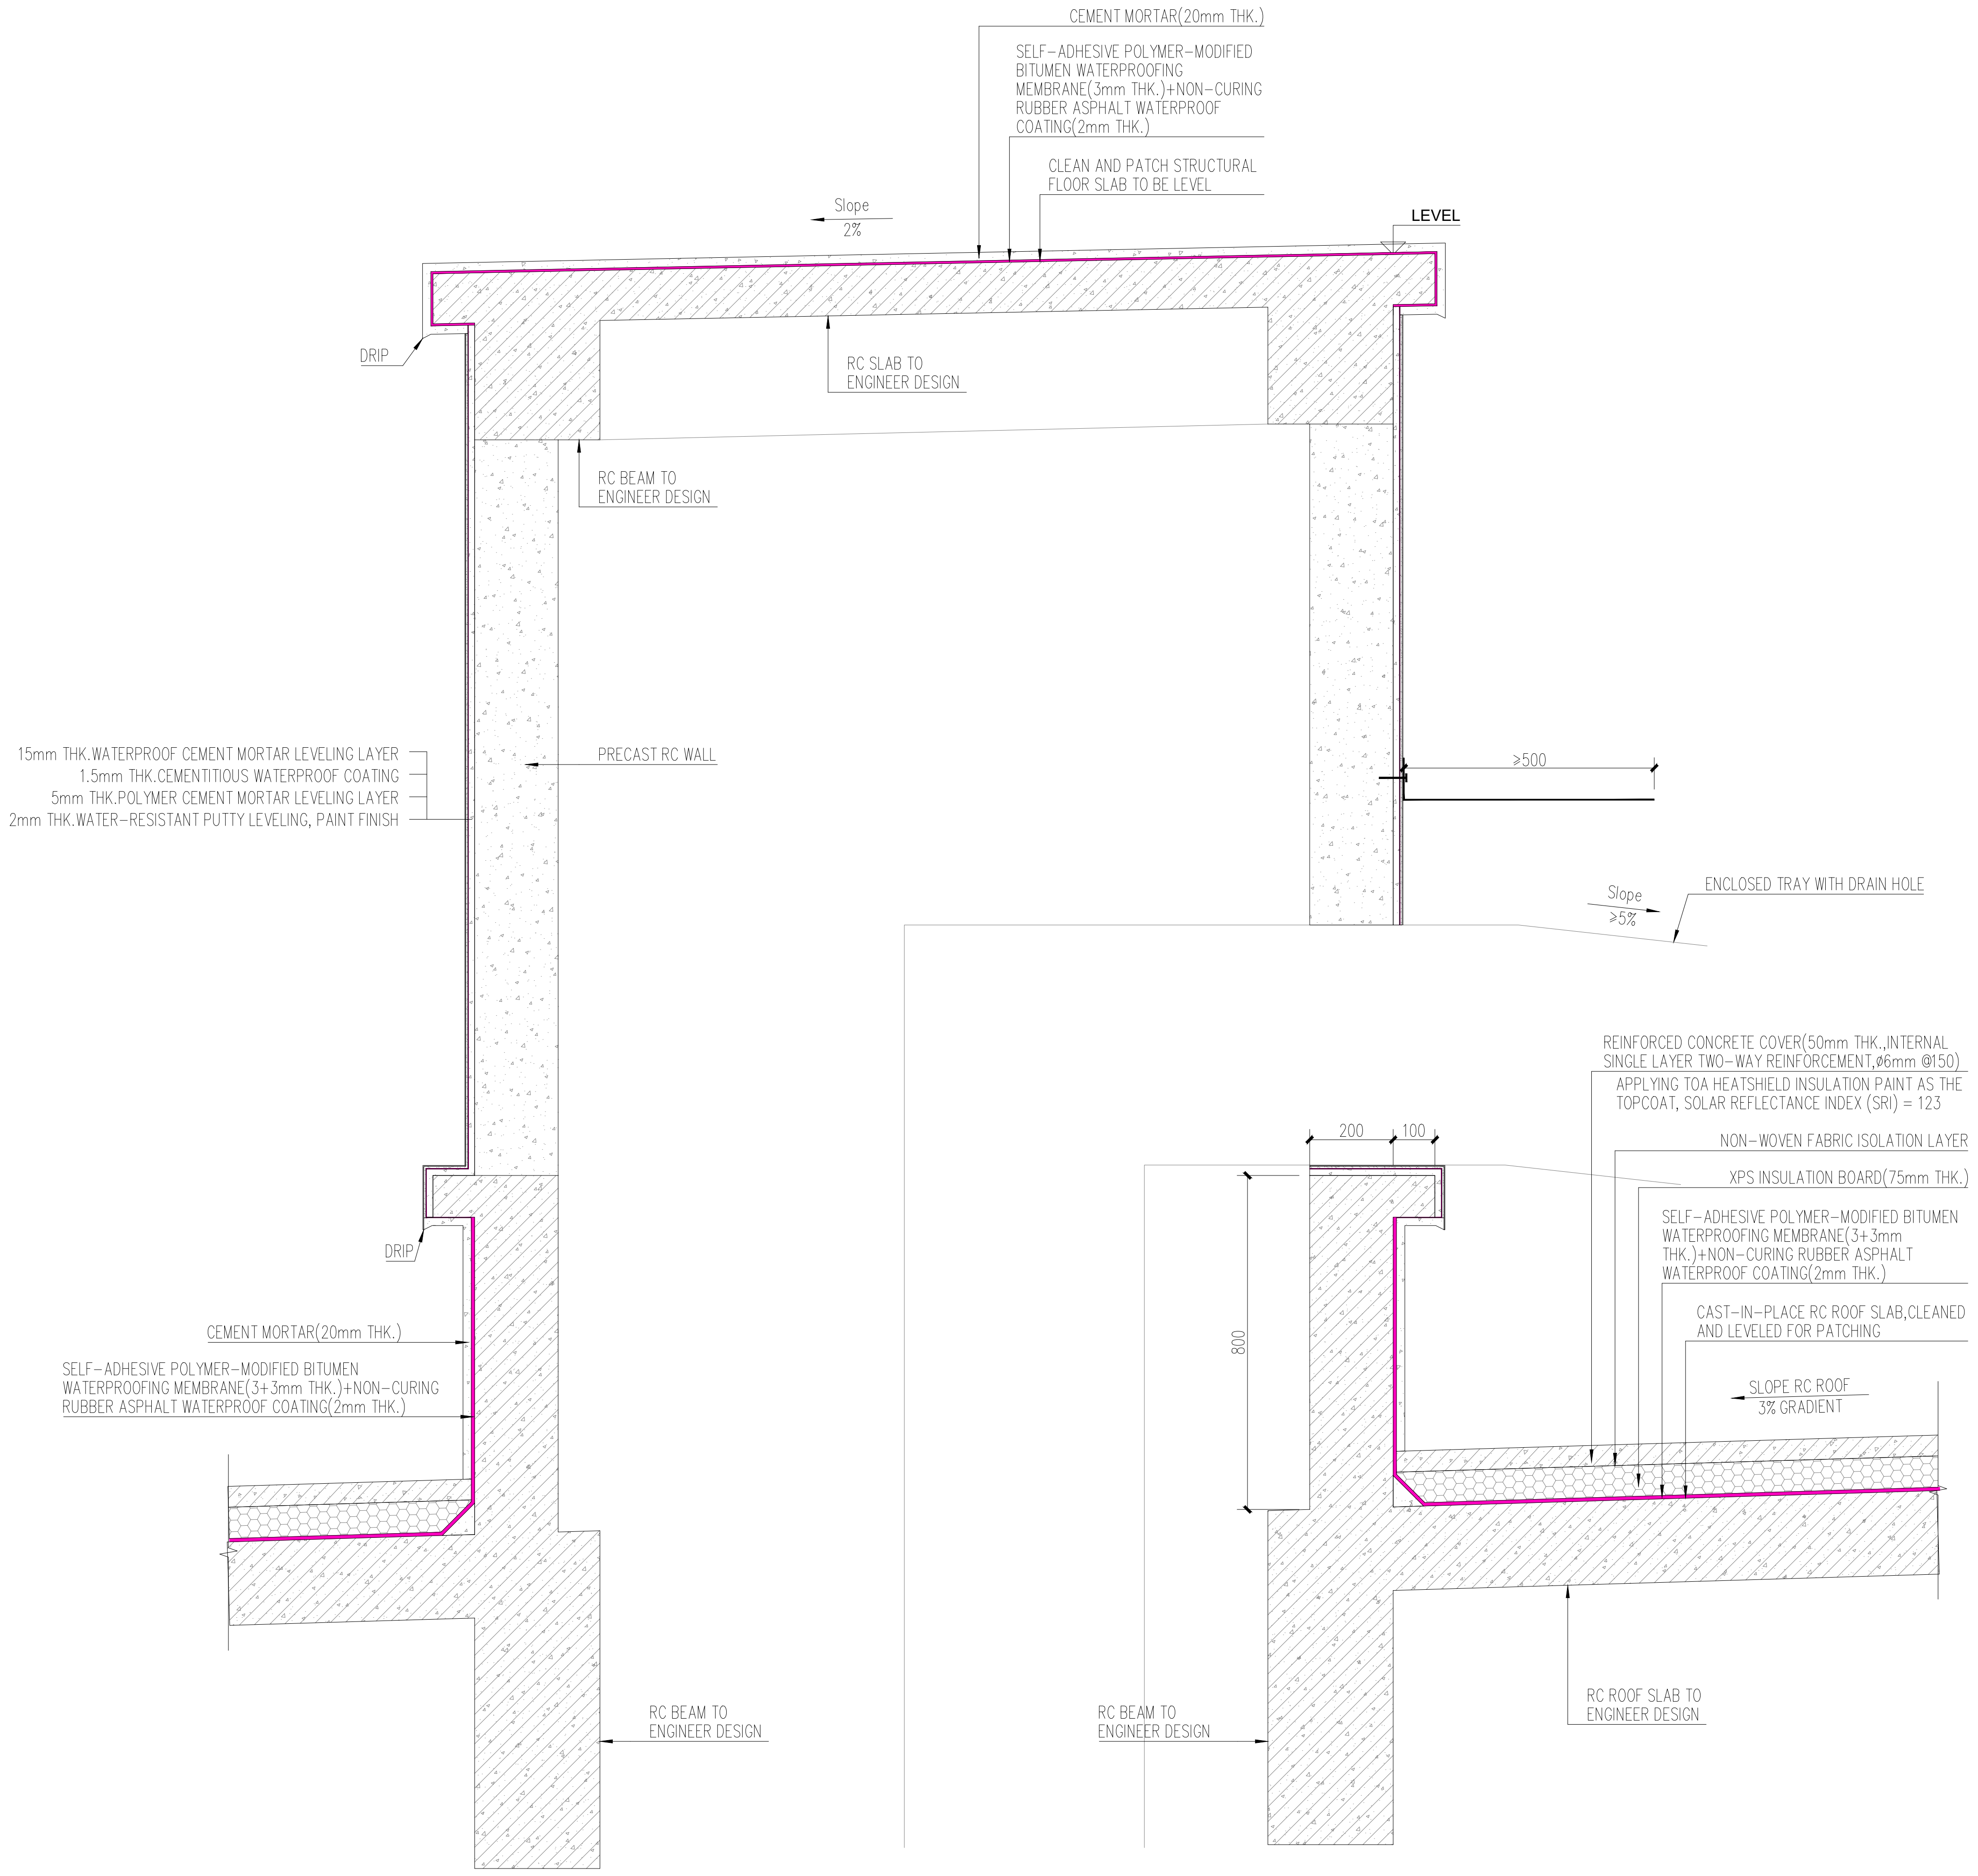
CEMENT MORTAR(20mm THK.)
SELF-ADHESIVE POLYMER-MODIFIED
BITUMEN WATERPROOFING
MEMBRANE(3mm THK.)+NON-CURING
RUBBER ASPHALT WATERPROOF
COATING(2mm THK.)
CLEAN AND PATCH STRUCTURAL
FLOOR SLAB TO BE LEVEL
Slope
2%
LEVEL
DRIP
RC SLAB TO
ENGINEER DESIGN
RC BEAM TO
ENGINEER DESIGN
15mm THK.WATERPROOF CEMENT MORTAR LEVELING LAYER
1.5mm THK.CEMENTITIOUS WATERPROOF COATING
5mm THK.POLYMER CEMENT MORTAR LEVELING LAYER
2mm THK.WATER-RESISTANT PUTTY LEVELING, PAINT FINISH
PRECAST RC WALL
≥500
Slope
≥5%
ENCLOSED TRAY WITH DRAIN HOLE
REINFORCED CONCRETE COVER(50mm THK.,INTERNAL
SINGLE LAYER TWO-WAY REINFORCEMENT,ø6mm @150)
APPLYING TOA HEATSHIELD INSULATION PAINT AS THE
TOPCOAT, SOLAR REFLECTANCE INDEX (SRI) = 123
200
100
NON-WOVEN FABRIC ISOLATION LAYER
XPS INSULATION BOARD(75mm THK.)
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN
WATERPROOFING MEMBRANE(3+3mm
THK.)+NON-CURING RUBBER ASPHALT
WATERPROOF COATING(2mm THK.)
DRIP
800
CAST-IN-PLACE RC ROOF SLAB,CLEANED
AND LEVELED FOR PATCHING
CEMENT MORTAR(20mm THK.)
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN
WATERPROOFING MEMBRANE(3+3mm THK.)+NON-CURING
RUBBER ASPHALT WATERPROOF COATING(2mm THK.)
SLOPE RC ROOF
3% GRADIENT
RC BEAM TO
ENGINEER DESIGN
RC BEAM TO
ENGINEER DESIGN
RC ROOF SLAB TO
ENGINEER DESIGN

ROOF EQUIPMENT SHAFT DETAIL-02
Scale 1:10

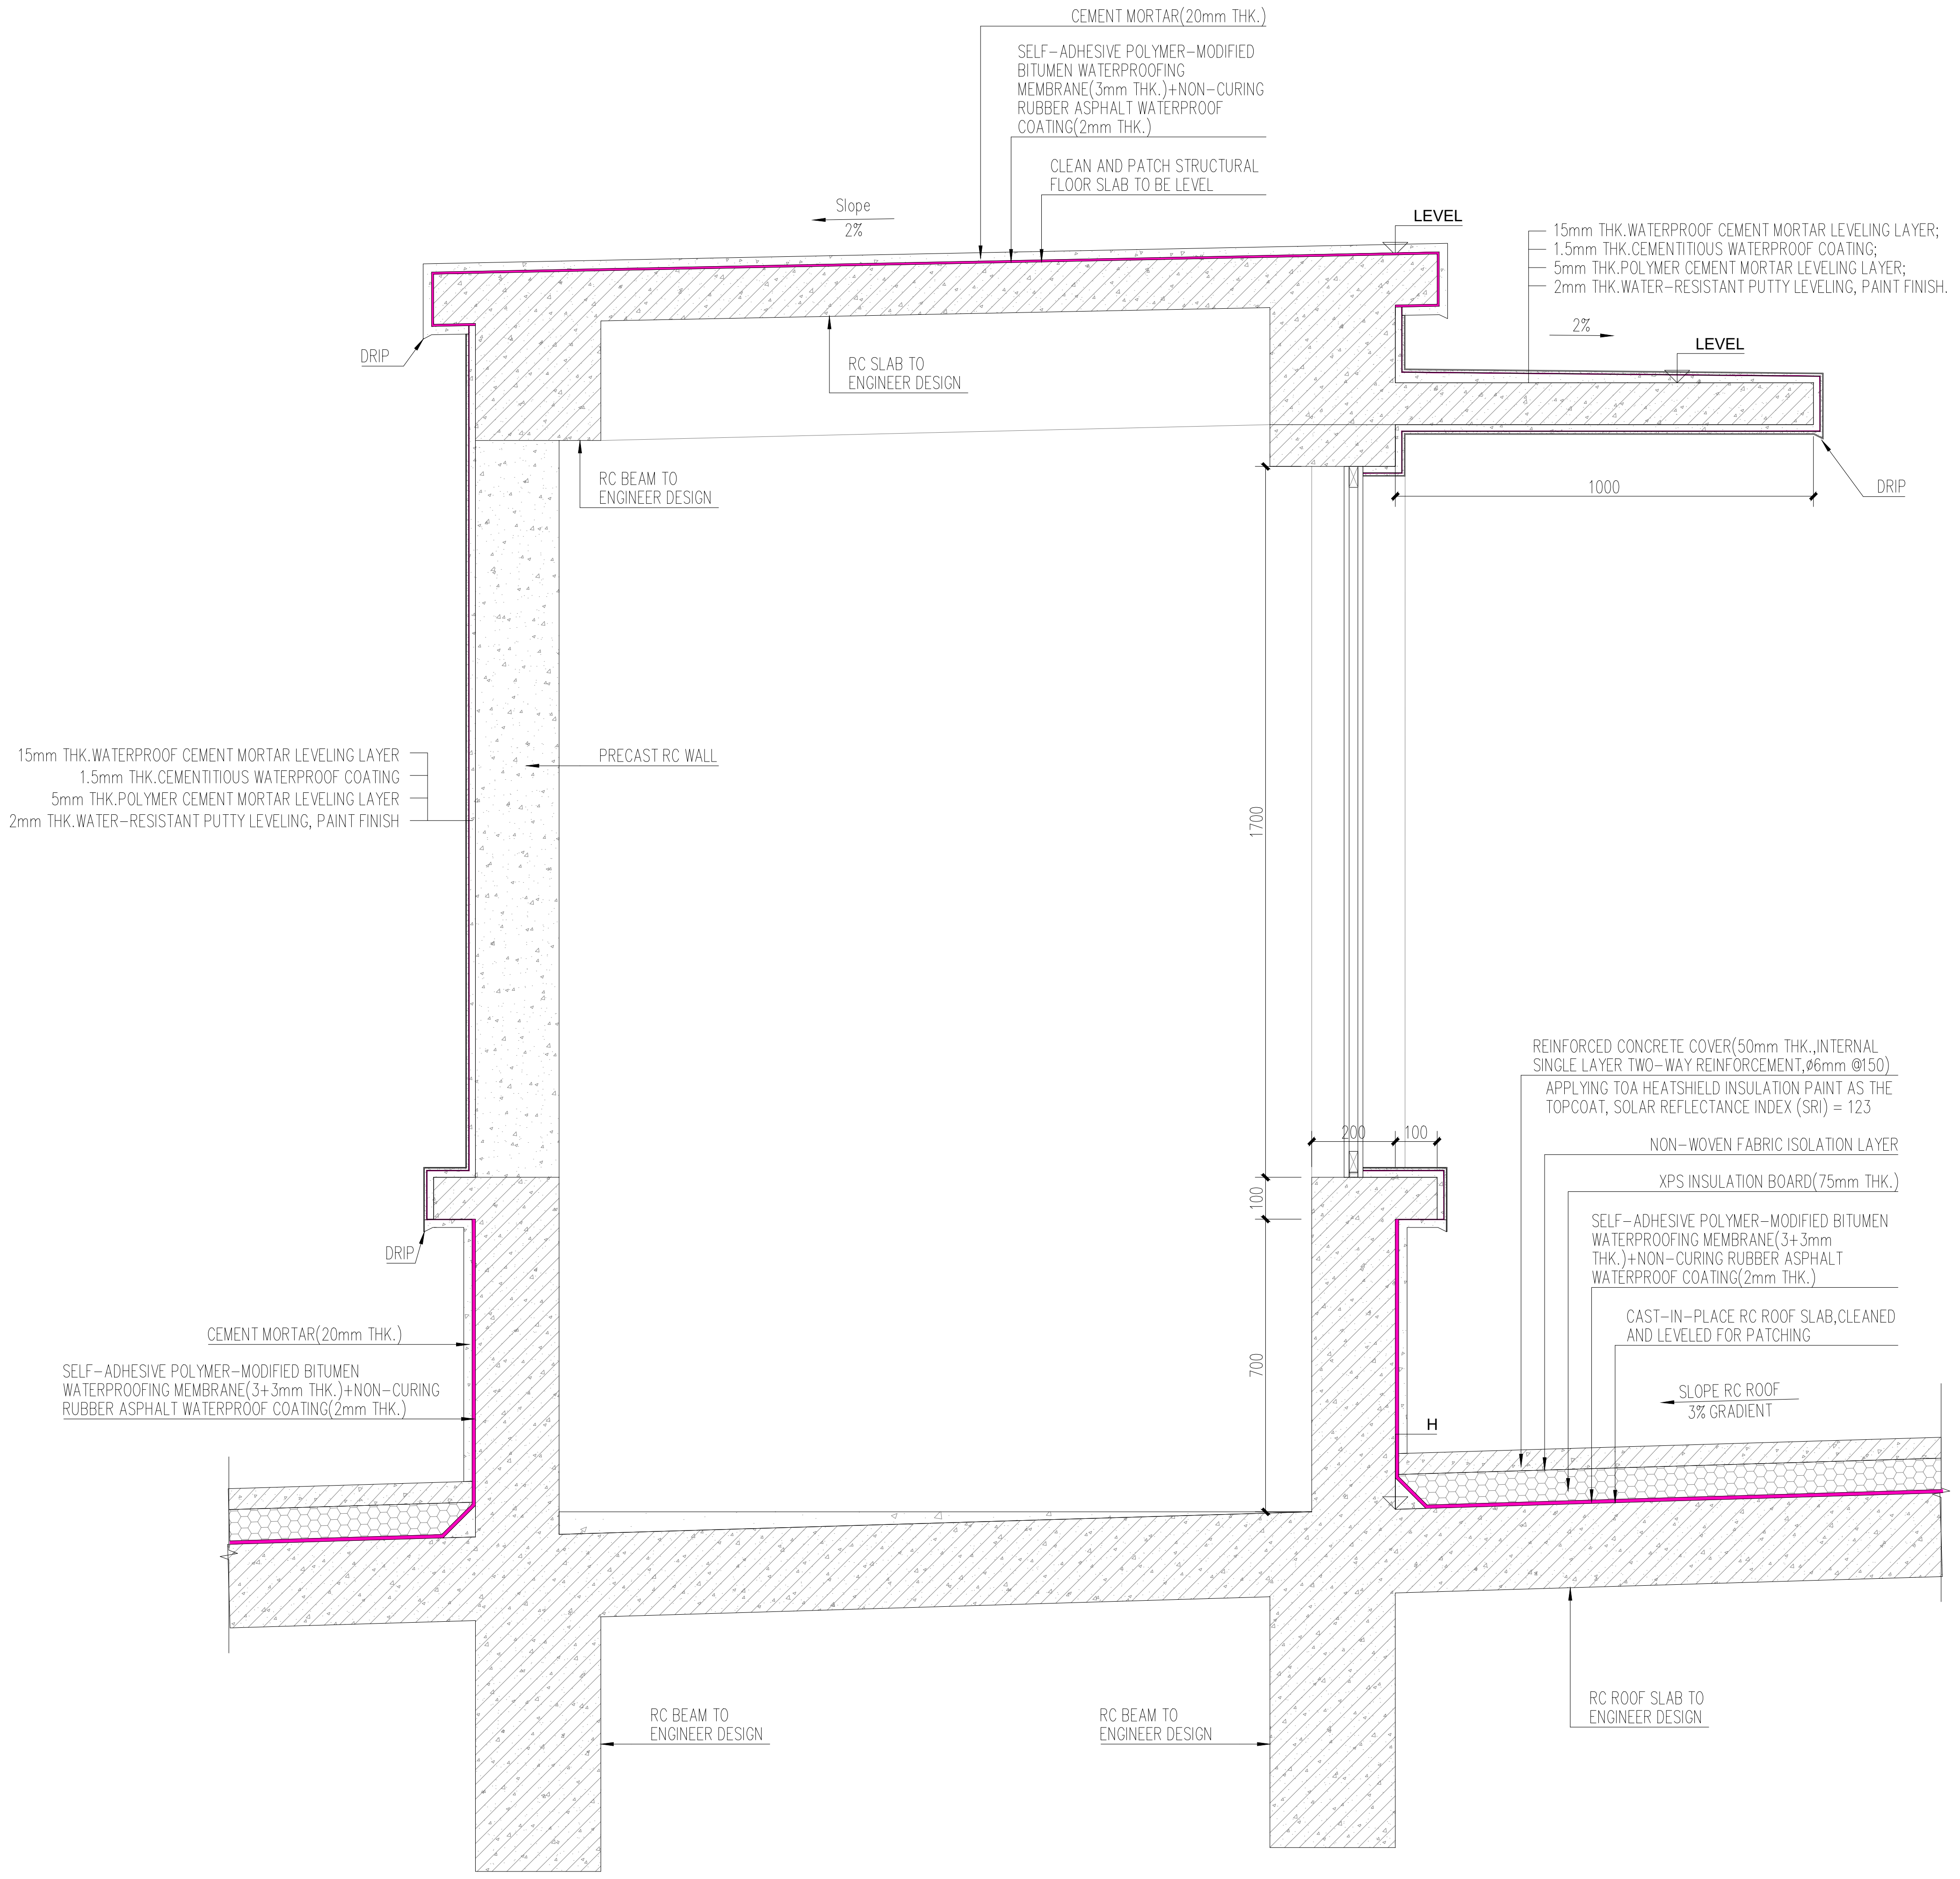
CEMENT MORTAR(20mm THK.)
SELF-ADHESIVE POLYMER-MODIFIED
BITUMEN WATERPROOFING
MEMBRANE(3mm THK.)+NON-CURING
RUBBER ASPHALT WATERPROOF
COATING(2mm THK.)
CLEAN AND PATCH STRUCTURAL
FLOOR SLAB TO BE LEVEL
Slope
2%
LEVEL
15mm THK.WATERPROOF CEMENT MORTAR LEVELING LAYER;
1.5mm THK.CEMENTITIOUS WATERPROOF COATING;
5mm THK.POLYMER CEMENT MORTAR LEVELING LAYER;
2mm THK.WATER-RESISTANT PUTTY LEVELING, PAINT FINISH.
2%
LEVEL
DRIP
RC SLAB TO
ENGINEER DESIGN
RC BEAM TO
ENGINEER DESIGN
1000
DRIP
15mm THK.WATERPROOF CEMENT MORTAR LEVELING LAYER
1.5mm THK.CEMENTITIOUS WATERPROOF COATING
5mm THK.POLYMER CEMENT MORTAR LEVELING LAYER
2mm THK.WATER-RESISTANT PUTTY LEVELING, PAINT FINISH
PRECAST RC WALL
1700
REINFORCED CONCRETE COVER(50mm THK.,INTERNAL
SINGLE LAYER TWO-WAY REINFORCEMENT,ø6mm @150)
APPLYING TOA HEATSHIELD INSULATION PAINT AS THE
TOPCOAT, SOLAR REFLECTANCE INDEX (SRI) = 123
200
100
NON-WOVEN FABRIC ISOLATION LAYER
XPS INSULATION BOARD(75mm THK.)
100
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN
WATERPROOFING MEMBRANE(3+3mm
THK.)+NON-CURING RUBBER ASPHALT
WATERPROOF COATING(2mm THK.)
DRIP
CAST-IN-PLACE RC ROOF SLAB,CLEANED
AND LEVELED FOR PATCHING
CEMENT MORTAR(20mm THK.)
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN
WATERPROOFING MEMBRANE(3+3mm THK.)+NON-CURING
RUBBER ASPHALT WATERPROOF COATING(2mm THK.)
700
SLOPE RC ROOF
3% GRADIENT
H
RC BEAM TO
ENGINEER DESIGN
RC BEAM TO
ENGINEER DESIGN
RC ROOF SLAB TO
ENGINEER DESIGN

ROOF EQUIPMENT SHAFT DETAIL-01
Scale 1:10

NOTE : THIS PRINT IS OF A CONFIDENTIAL NATURE, IT SHALL NOT BE TRACED,PHOTOGRAPHED,PHOTOSTATED OR REPRODUCED IN ANY MANER,NOR USED FOR ANY PURPOSE WHATSOEVER EXCEPT BY WRITTEN PERMISSION

CLIENT :

GULF EDGE DC 01

87 Wireless Road, M Thai Tower 11th. Floor, All Seasons Place, Lumpini,
Pathumwan, Bangkok 10330, Thailand

CONTRACTOR :

华西发展(泰国)有限公司
บริษัท หัวซือ ดีเวลลอปเม้นต์ (ประเทศไทย) จำกัด
HUASHI DEVELOPMENT CO.,LTD
No. 202, Room No. 1403, 14/F, Le Concorde Building,
Ratchadapisek Road, Huaykhwang Sub-District,
Huaykhwang District, Bangkok Metropolitan 10310.

CONSULTANT :

ARbay
บริษัท เอ อาร์ เบย์ จำกัด
ARbay Company Limited
31 st Floor Bangkok Insurance Building
25 South Sathorn road Thungmahamek
Sathorn Bangkok 10120 THAILAND
T +66 (0) 2286 8199
F +66 (0) 2286 2863
info@arbay.co.th

CONSULTANT :

Qbic Engineers & Architects Co.,Ltd.
8 Soi KALONG 4 SANAMBINNAM ROAD,
THASAI SUB-DISTRICT, MUANG NONTHABURI DISTRICT
, NONTHABURI.
Tel 662-950-4374
Fax 662-580-3231
E-Mail : qbic@qbic.co.th, www.qbic.co.th
QBIC ENGINEERS AND ARCHITECTS CO.,LTD.

CONSULTANT :

MITR
MITR TECHNICAL CONSULTANT CO.,LTD.
1168/8 12th FLOOR, LUMPINI TOWER BUILDING,
RAMA IV RD., THUNGMAHAMEK, SATHORN, BANGKOK 10120, THAILAND
TEL : 0-2679-9079-84
FAX : 0-2679-9085 E-mail: mitr_dd@mitr.com

Architect : SIGNATURE
ประกิต พนานุรัตน์ วสถ. 580
ที่อยู่
251/1 ถ.จารุเมือง แขวงรองเมือง เขตปทุมวัน
กรุงเทพมหานคร โทรศัพท์ 02-286-8199

Structural Engineer : SIGNATURE
วิศวกรผู้ออกแบบโครงสร้าง
ณัฐสม สงวนวงษ์ วย 1423
ที่อยู่
2/1 ซ.รามคำแหง 150 ถ.รามคำแหง
แขวง สะพานสูง เขต สะพานสูง กทม. 10240

Structural Inspector : SIGNATURE
วิศวกรผู้ตรวจสอบโครงสร้าง
โกมล จุฑาภัทร วย 964
ที่อยู่
24/18 ซ.นวมินทร์ 129 ถ. นวมินทร์
แขวง นวลจันทร์ เขต บึงกุ่ม กทม. 10230

Electrical Engineer : SIGNATURE
วิศวกรผู้ออกแบบระบบไฟฟ้ากำลัง
นายสุภัทร บูรณวิทย์ วฟก.1265
ที่อยู่
21 ซอยทานสัมฤทธิ์ 13
ตำบลท่าทราย อ.เมืองนนทบุรี จ.นนทบุรี 11000

Mechanical Engineer : SIGNATURE
วิศวกรผู้ออกแบบระบบเครื่องกลและปรับอากาศ
นายประสิทธิ์ เกียวสุนทร วก.1221
ประสิทธิ์
ที่อยู่
44/372 ซอยบางกระดี่ 35/1 แขวงแสมดำ
เขตบางขุนเทียน กทม. 10150

Sanitary Engineer : SIGNATURE
วิศวกรผู้ออกแบบระบบสุขาภิบาล และดับเพลิง
นายทศวรรษ สันนฤทธิ์ วส. 215
ที่อยู่
บ้านเลขที่ 99/107 หมู่ที่ 3 ต.ศีรษะจรเข้น้อย
อ.บางเสาธง จ.สมุทรปราการ 10540

ISSUE/REVISION

REV.	DESCRIPTION	DATE
A	90% DEVELOPED	09/05/2026

PROJECT NAME :
GEDC 01

LOCATION:
Nikhom Phattana district, Rayong ,industrial estate,CPGC

BUILDING :
MAIN BUILDING

90% DEVELOPED

TITLE :
WATERPROOFING DETAILS A

JOB NO.	SCALE 1:20
DRAWN FLY	REF.
CHECKED LJC	DWG.NO. MPK01A-90-A-WD-001
APPROVED LXD	
DATE 2026.05.09	