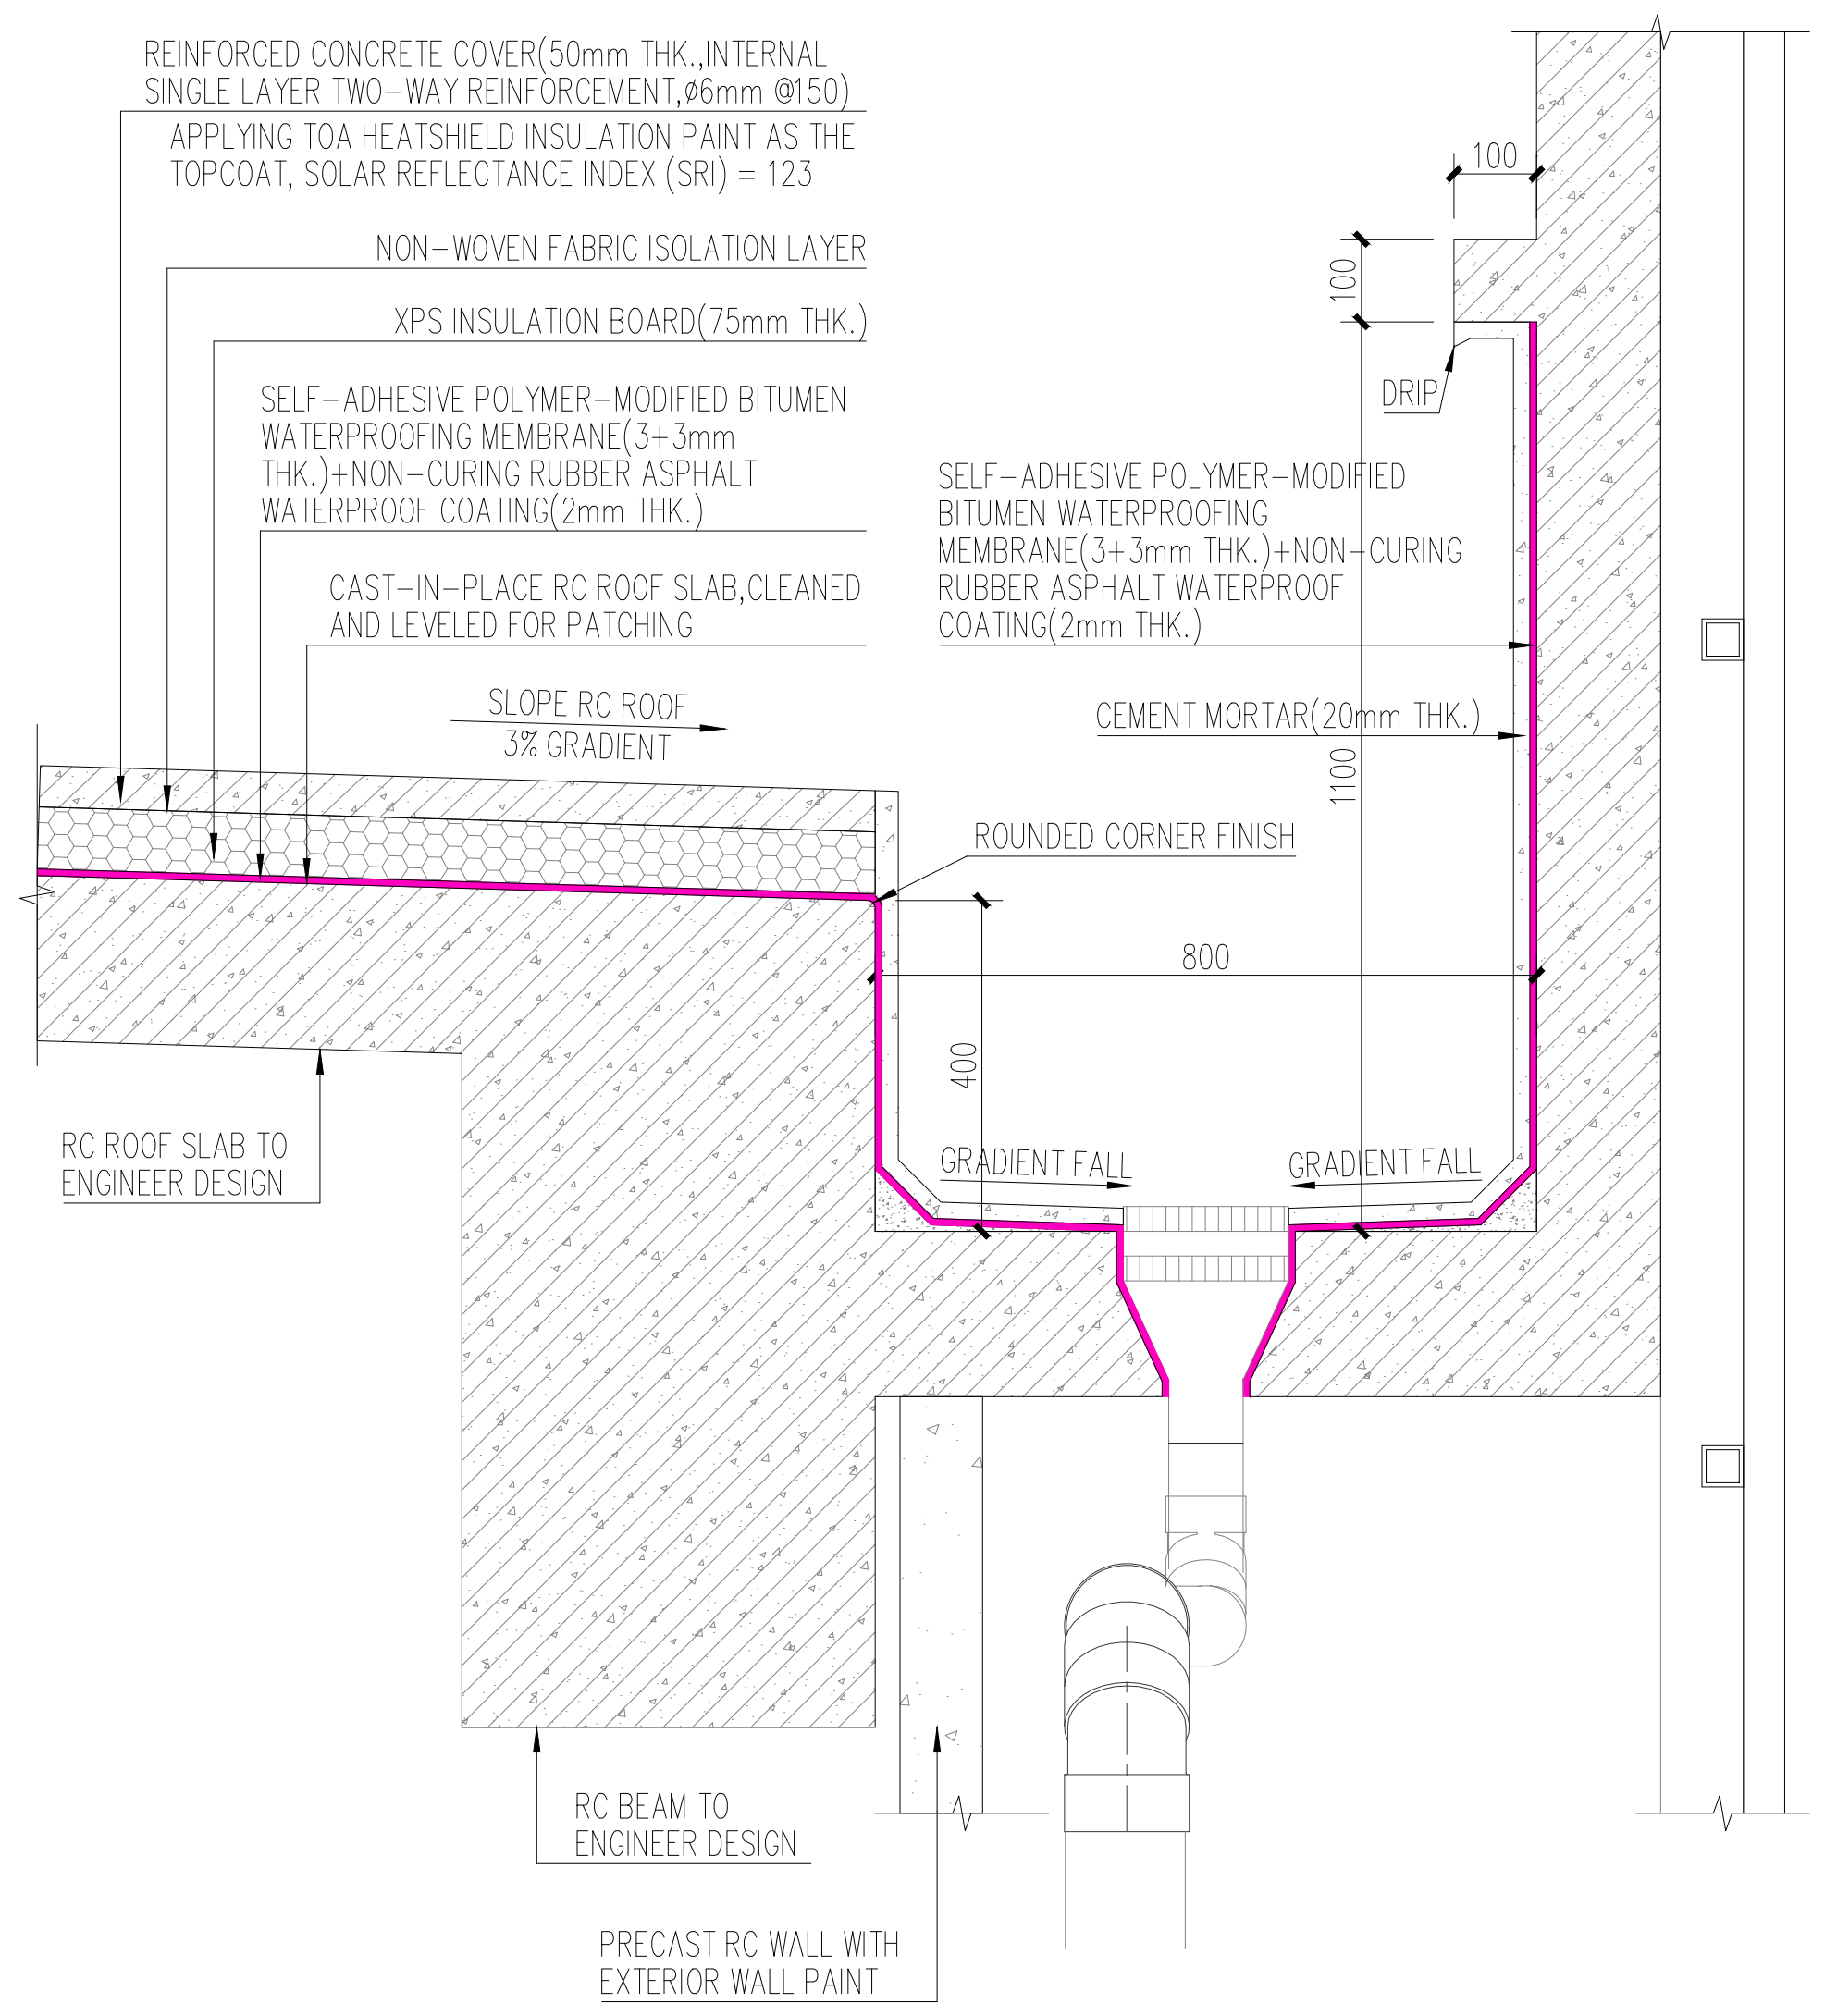
REINFORCED CONCRETE COVER(50mm THK.,INTERNAL SINGLE LAYER TWO-WAY REINFORCEMENT,ø6mm @150)
APPLYING TOA HEATSHIELD INSULATION PAINT AS THE TOPCOAT, SOLAR REFLECTANCE INDEX (SRI) = 123
NON-WOVEN FABRIC ISOLATION LAYER
XPS INSULATION BOARD(75mm THK.)
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN WATERPROOFING MEMBRANE(3+3mm THK.)+NON-CURING RUBBER ASPHALT WATERPROOF COATING(2mm THK.)
CAST-IN-PLACE RC ROOF SLAB,CLEANED AND LEVELED FOR PATCHING
SLOPE RC ROOF
3% GRADIENT
100
100
DRIP
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN WATERPROOFING MEMBRANE(3+3mm THK.)+NON-CURING RUBBER ASPHALT WATERPROOF COATING(2mm THK.)
CEMENT MORTAR(20mm THK.)
1100
ROUNDED CORNER FINISH
800
400
GRADIENT FALL
GRADIENT FALL
RC ROOF SLAB TO ENGINEER DESIGN
RC BEAM TO ENGINEER DESIGN
PRECAST RC WALL WITH EXTERIOR WALL PAINT

ROOF GUTTER WATERPROOFING DETAIL-01
Scale 1:10

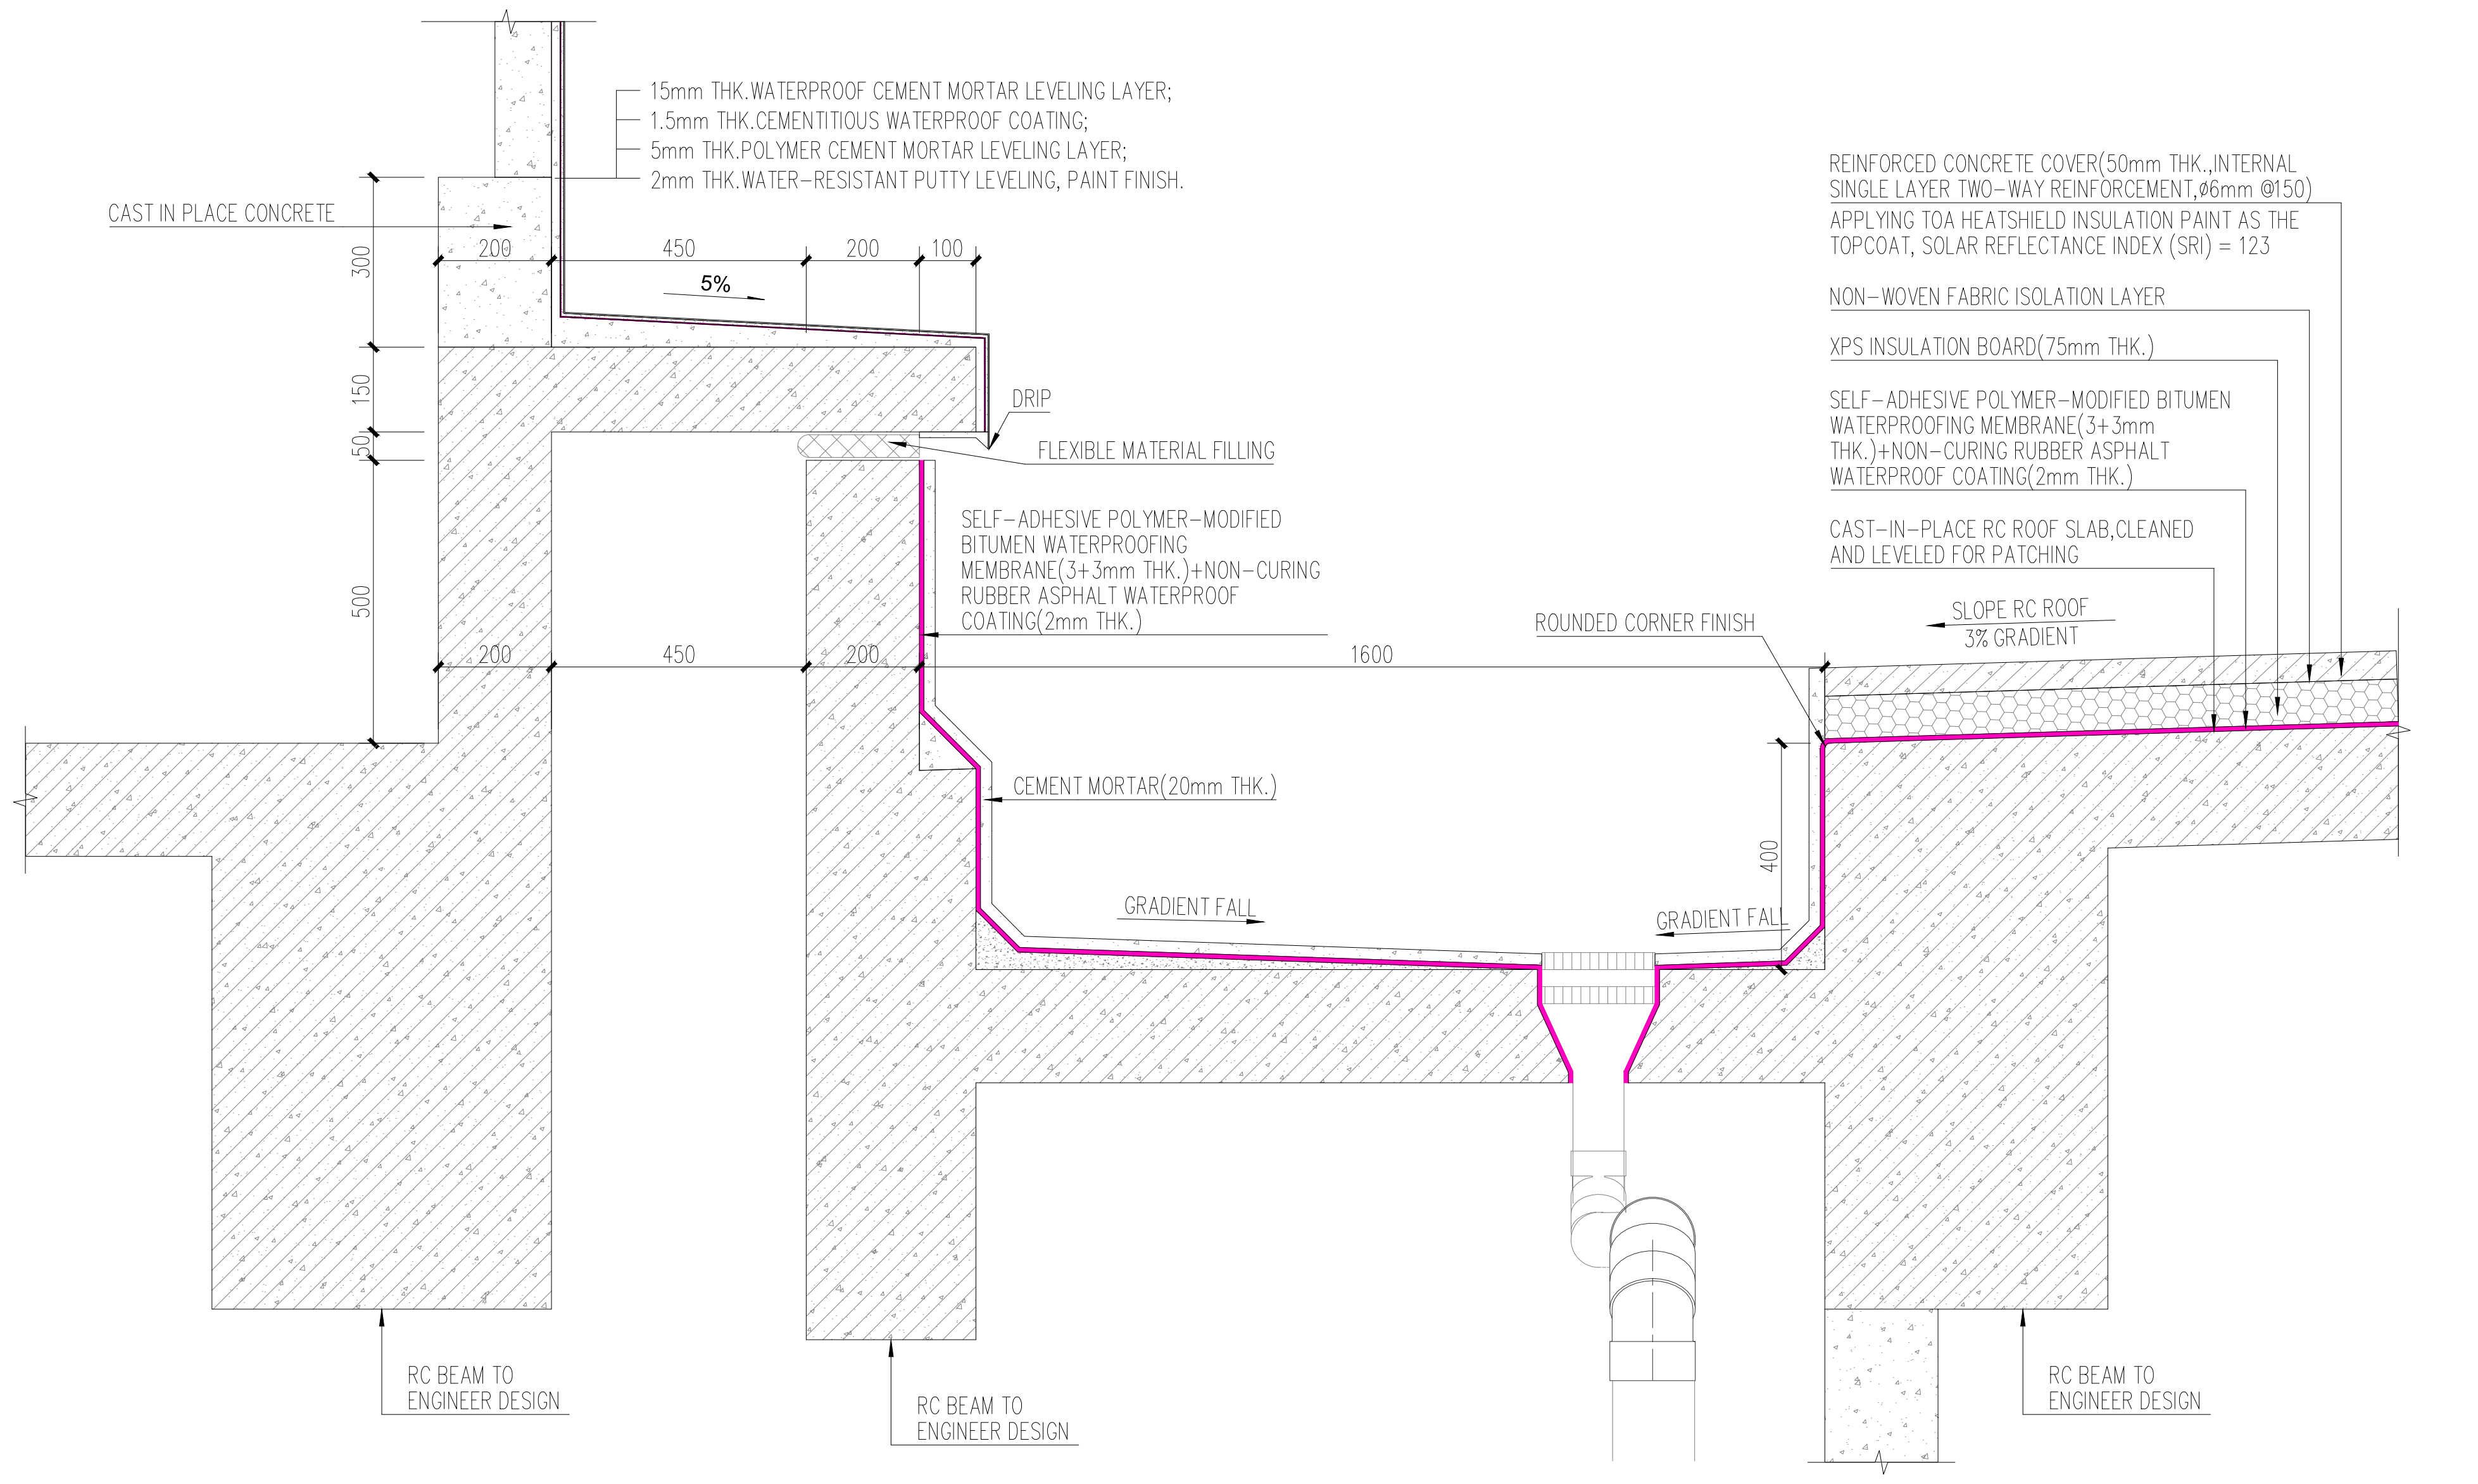
15mm THK.WATERPROOF CEMENT MORTAR LEVELING LAYER;
1.5mm THK.CEMENTITIOUS WATERPROOF COATING;
5mm THK.POLYMER CEMENT MORTAR LEVELING LAYER;
2mm THK.WATER-RESISTANT PUTTY LEVELING, PAINT FINISH.
CAST IN PLACE CONCRETE
300
200
450
200
100
5%
150
50
500
DRIP
FLEXIBLE MATERIAL FILLING
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN WATERPROOFING MEMBRANE(3+3mm THK.)+NON-CURING RUBBER ASPHALT WATERPROOF COATING(2mm THK.)
200
450
200
1600
CEMENT MORTAR(20mm THK.)
GRADIENT FALL
GRADIENT FALL
ROUNDED CORNER FINISH
400
REINFORCED CONCRETE COVER(50mm THK.,INTERNAL SINGLE LAYER TWO-WAY REINFORCEMENT,ø6mm @150)
APPLYING TOA HEATSHIELD INSULATION PAINT AS THE TOPCOAT, SOLAR REFLECTANCE INDEX (SRI) = 123
NON-WOVEN FABRIC ISOLATION LAYER
XPS INSULATION BOARD(75mm THK.)
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN WATERPROOFING MEMBRANE(3+3mm THK.)+NON-CURING RUBBER ASPHALT WATERPROOF COATING(2mm THK.)
CAST-IN-PLACE RC ROOF SLAB,CLEANED AND LEVELED FOR PATCHING
SLOPE RC ROOF
3% GRADIENT
RC BEAM TO ENGINEER DESIGN
RC BEAM TO ENGINEER DESIGN
RC BEAM TO ENGINEER DESIGN

ROOF GUTTER WATERPROOFING DETAIL-02
Scale 1:10

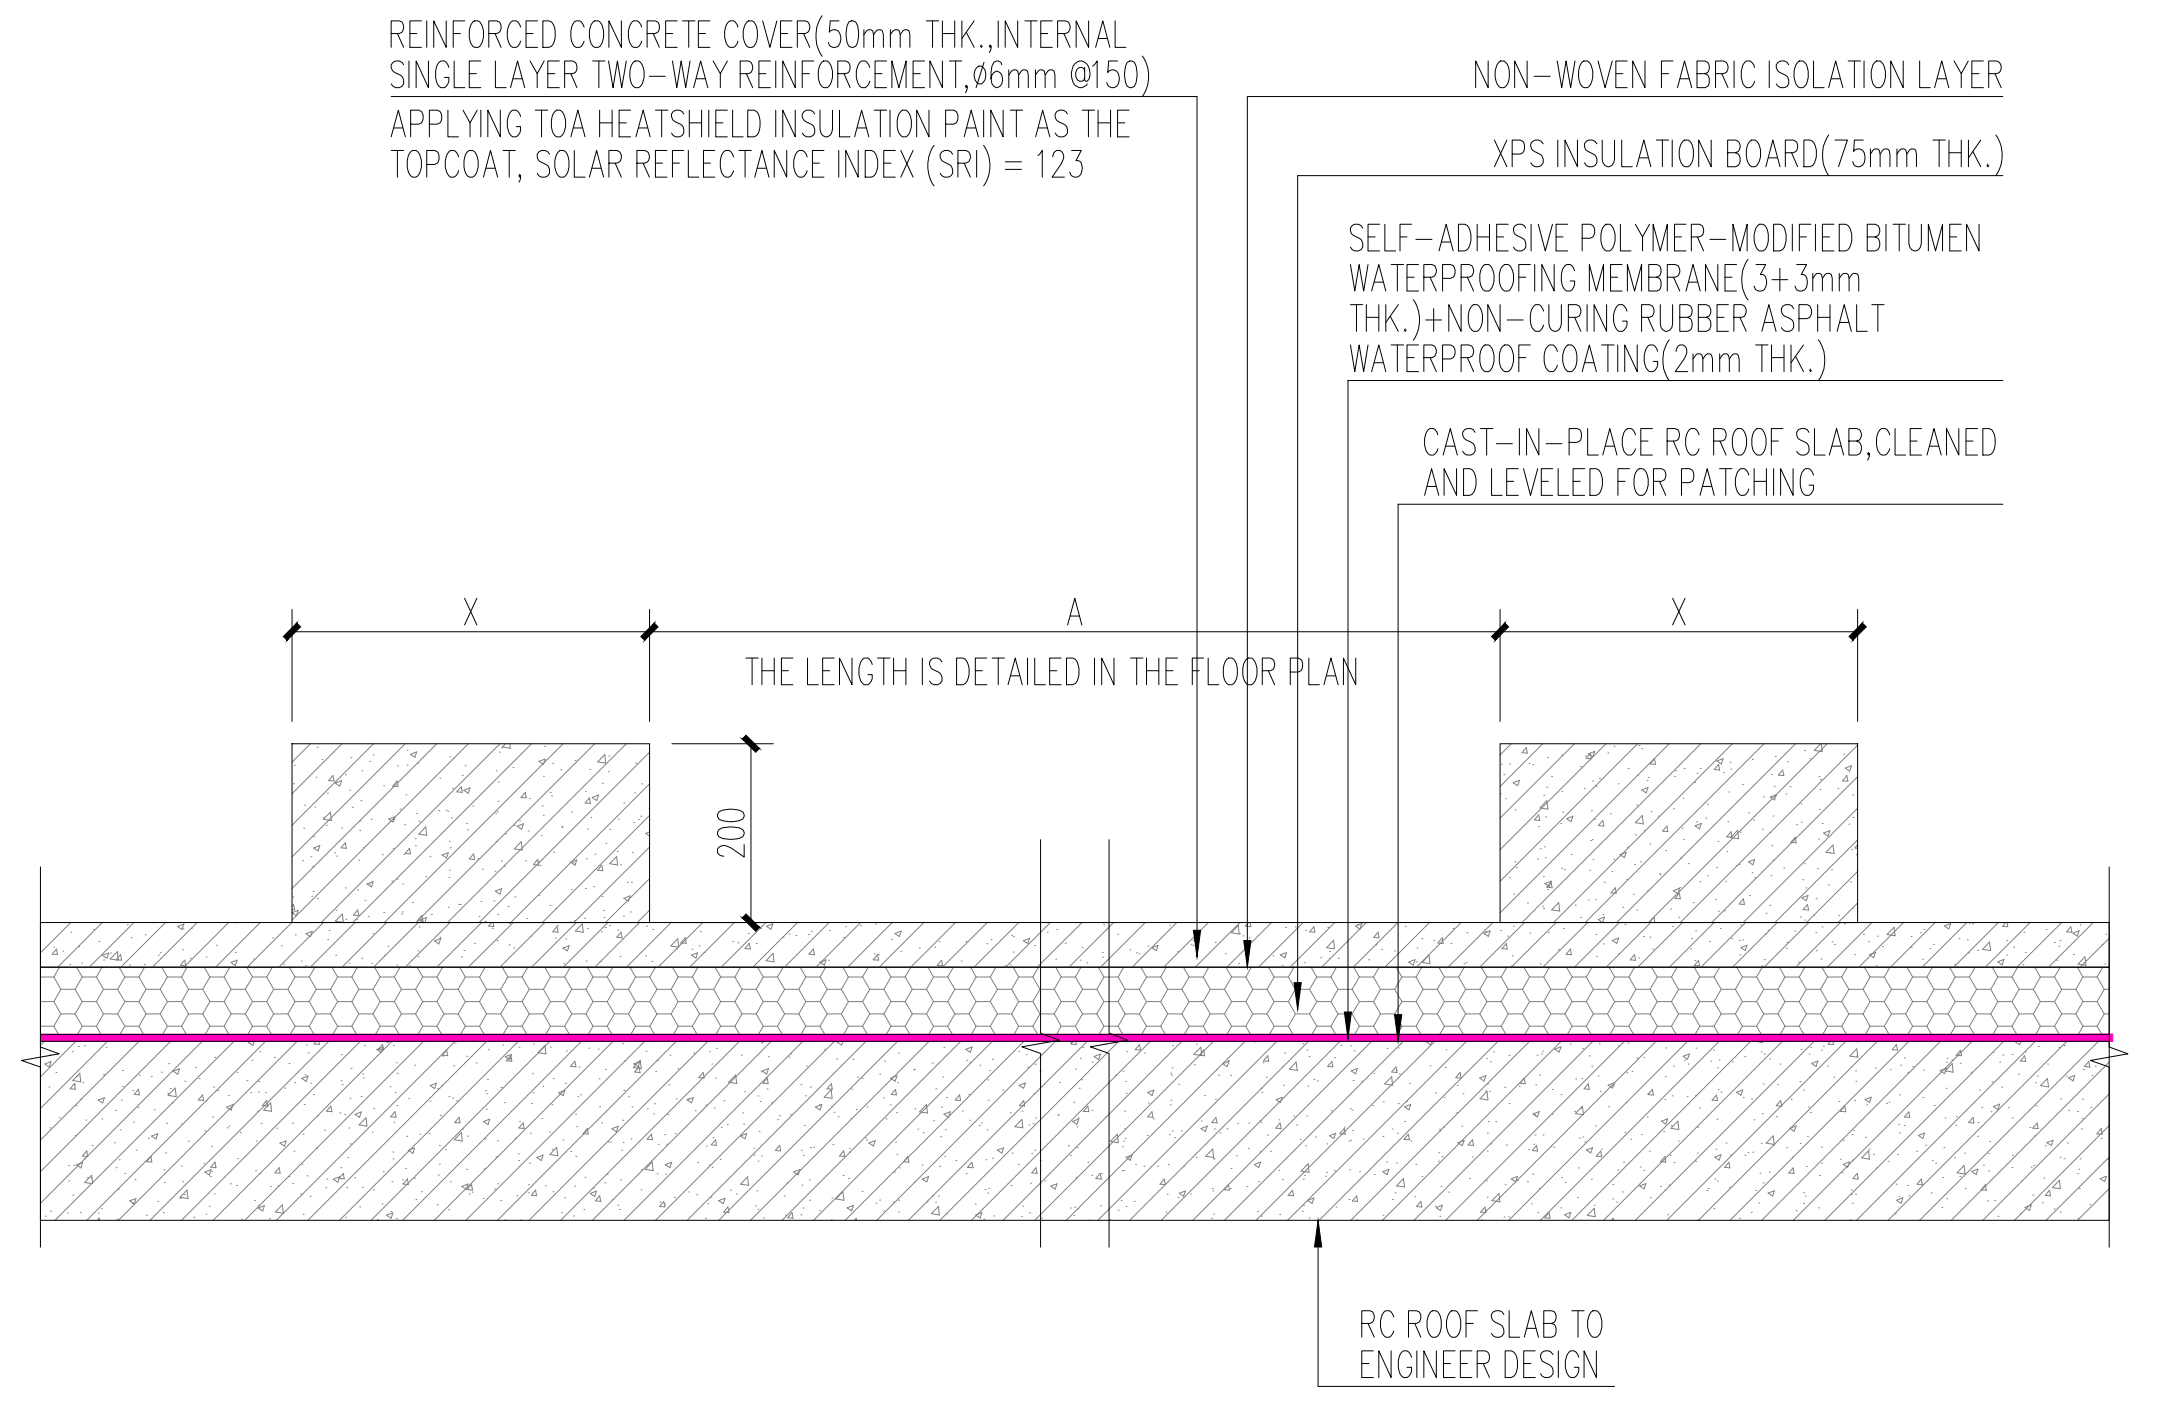
REINFORCED CONCRETE COVER(50mm THK.,INTERNAL SINGLE LAYER TWO-WAY REINFORCEMENT,ø6mm @150)
APPLYING TOA HEATSHIELD INSULATION PAINT AS THE TOPCOAT, SOLAR REFLECTANCE INDEX (SRI) = 123
NON-WOVEN FABRIC ISOLATION LAYER
XPS INSULATION BOARD(75mm THK.)
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN WATERPROOFING MEMBRANE(3+3mm THK.)+NON-CURING RUBBER ASPHALT WATERPROOF COATING(2mm THK.)
CAST-IN-PLACE RC ROOF SLAB,CLEANED AND LEVELED FOR PATCHING
X
A
X
THE LENGTH IS DETAILED IN THE FLOOR PLAN
200
RC ROOF SLAB TO ENGINEER DESIGN

R.C EQUIPMENT FOUNDATION DETAIL-01
Scale 1:10

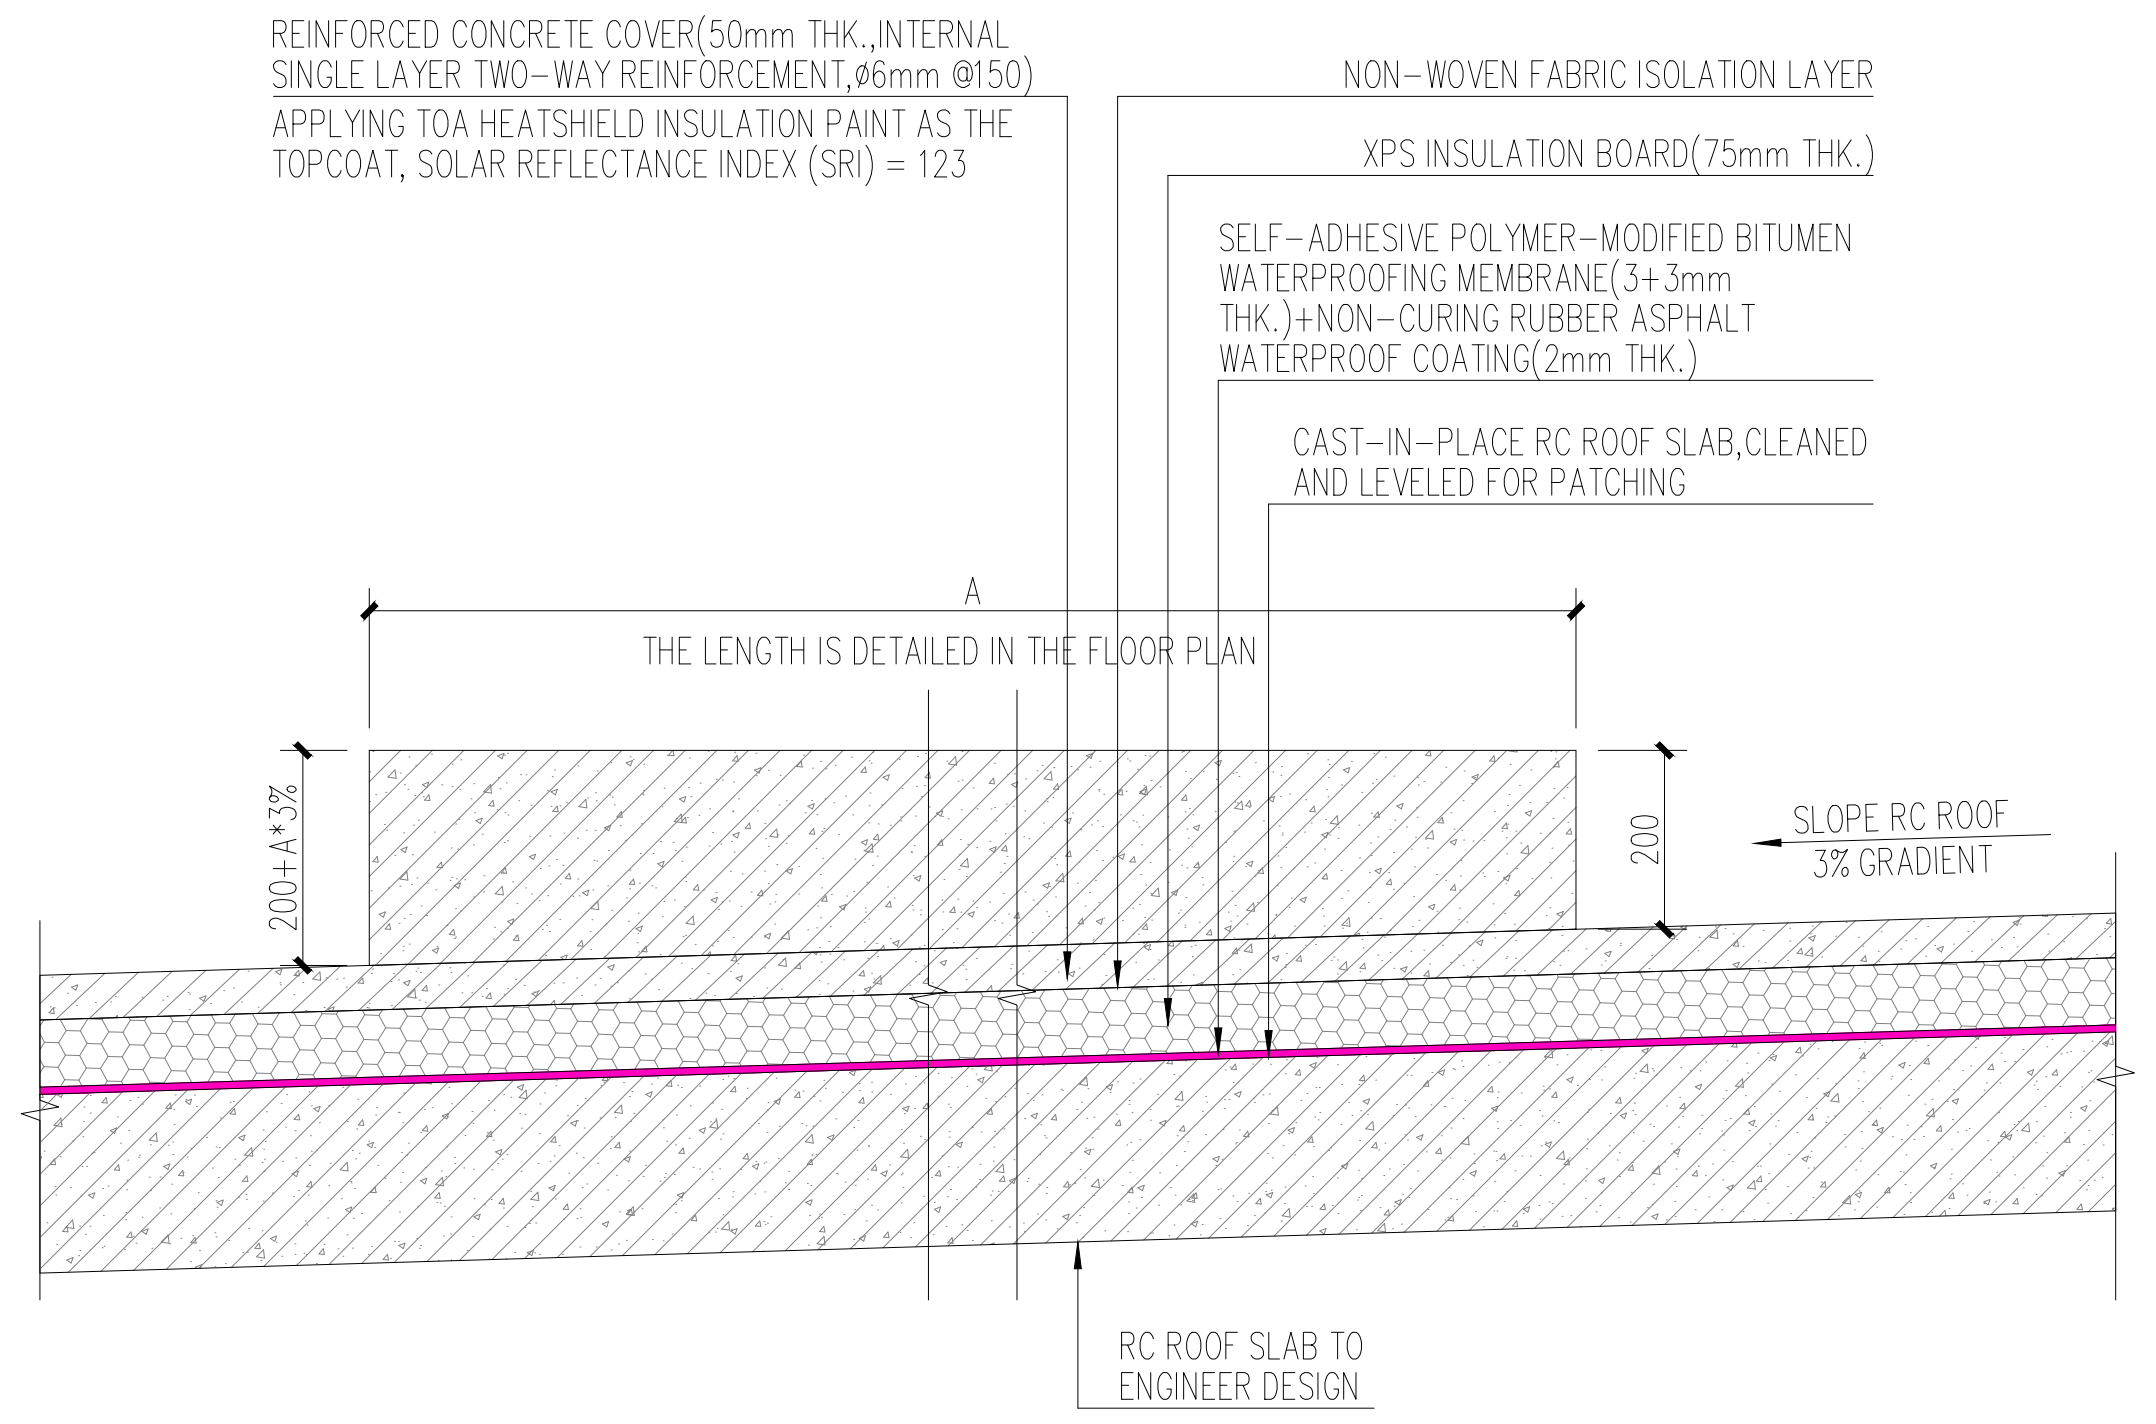
REINFORCED CONCRETE COVER(50mm THK.,INTERNAL SINGLE LAYER TWO-WAY REINFORCEMENT,ø6mm @150)
APPLYING TOA HEATSHIELD INSULATION PAINT AS THE TOPCOAT, SOLAR REFLECTANCE INDEX (SRI) = 123
NON-WOVEN FABRIC ISOLATION LAYER
XPS INSULATION BOARD(75mm THK.)
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN WATERPROOFING MEMBRANE(3+3mm THK.)+NON-CURING RUBBER ASPHALT WATERPROOF COATING(2mm THK.)
CAST-IN-PLACE RC ROOF SLAB,CLEANED AND LEVELED FOR PATCHING
A
THE LENGTH IS DETAILED IN THE FLOOR PLAN
200+A*3%
200
SLOPE RC ROOF
3% GRADIENT
RC ROOF SLAB TO ENGINEER DESIGN

R.C EQUIPMENT FOUNDATION DETAIL-02
Scale 1:10

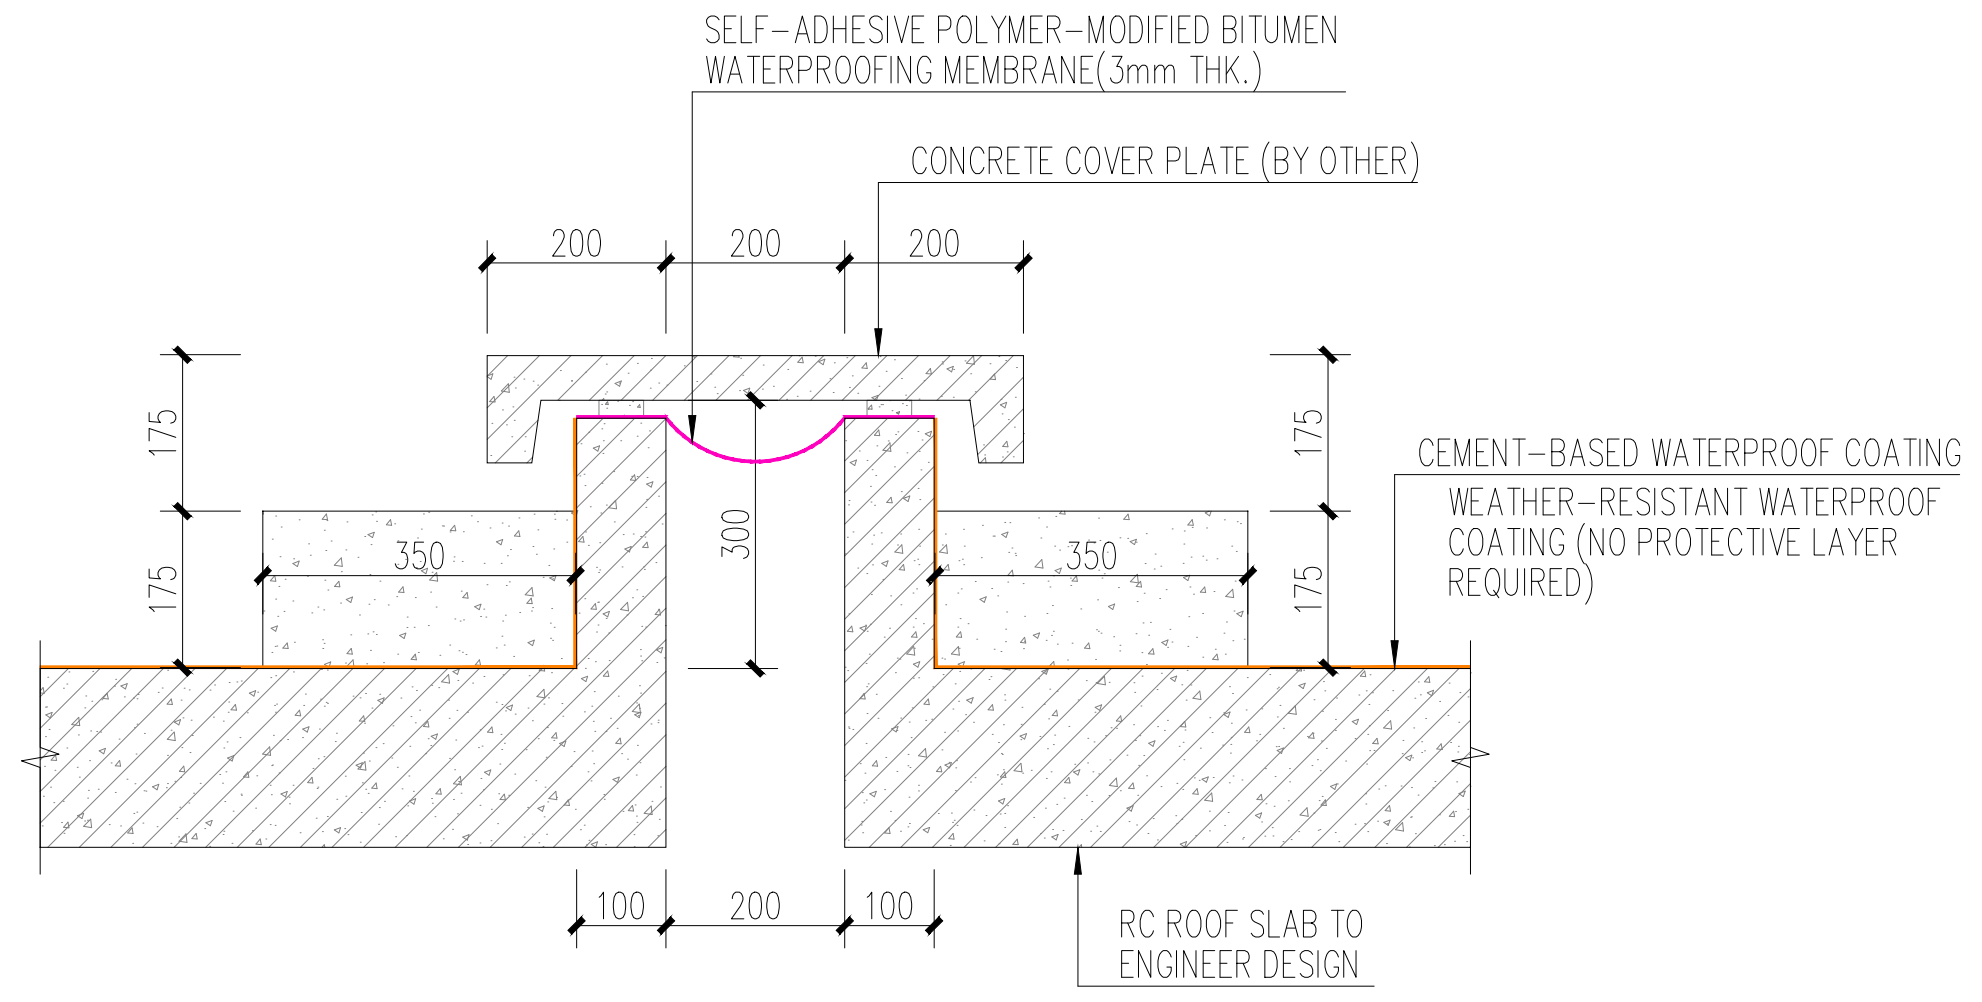
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN WATERPROOFING MEMBRANE(3mm THK.)
CONCRETE COVER PLATE (BY OTHER)
200
200
200
175
175
350
300
350
175
175
CEMENT-BASED WATERPROOF COATING
WEATHER-RESISTANT WATERPROOF COATING (NO PROTECTIVE LAYER REQUIRED)
100
200
100
RC ROOF SLAB TO ENGINEER DESIGN

ROOF DEFORMATION JOINT DETAIL
Scale 1:10

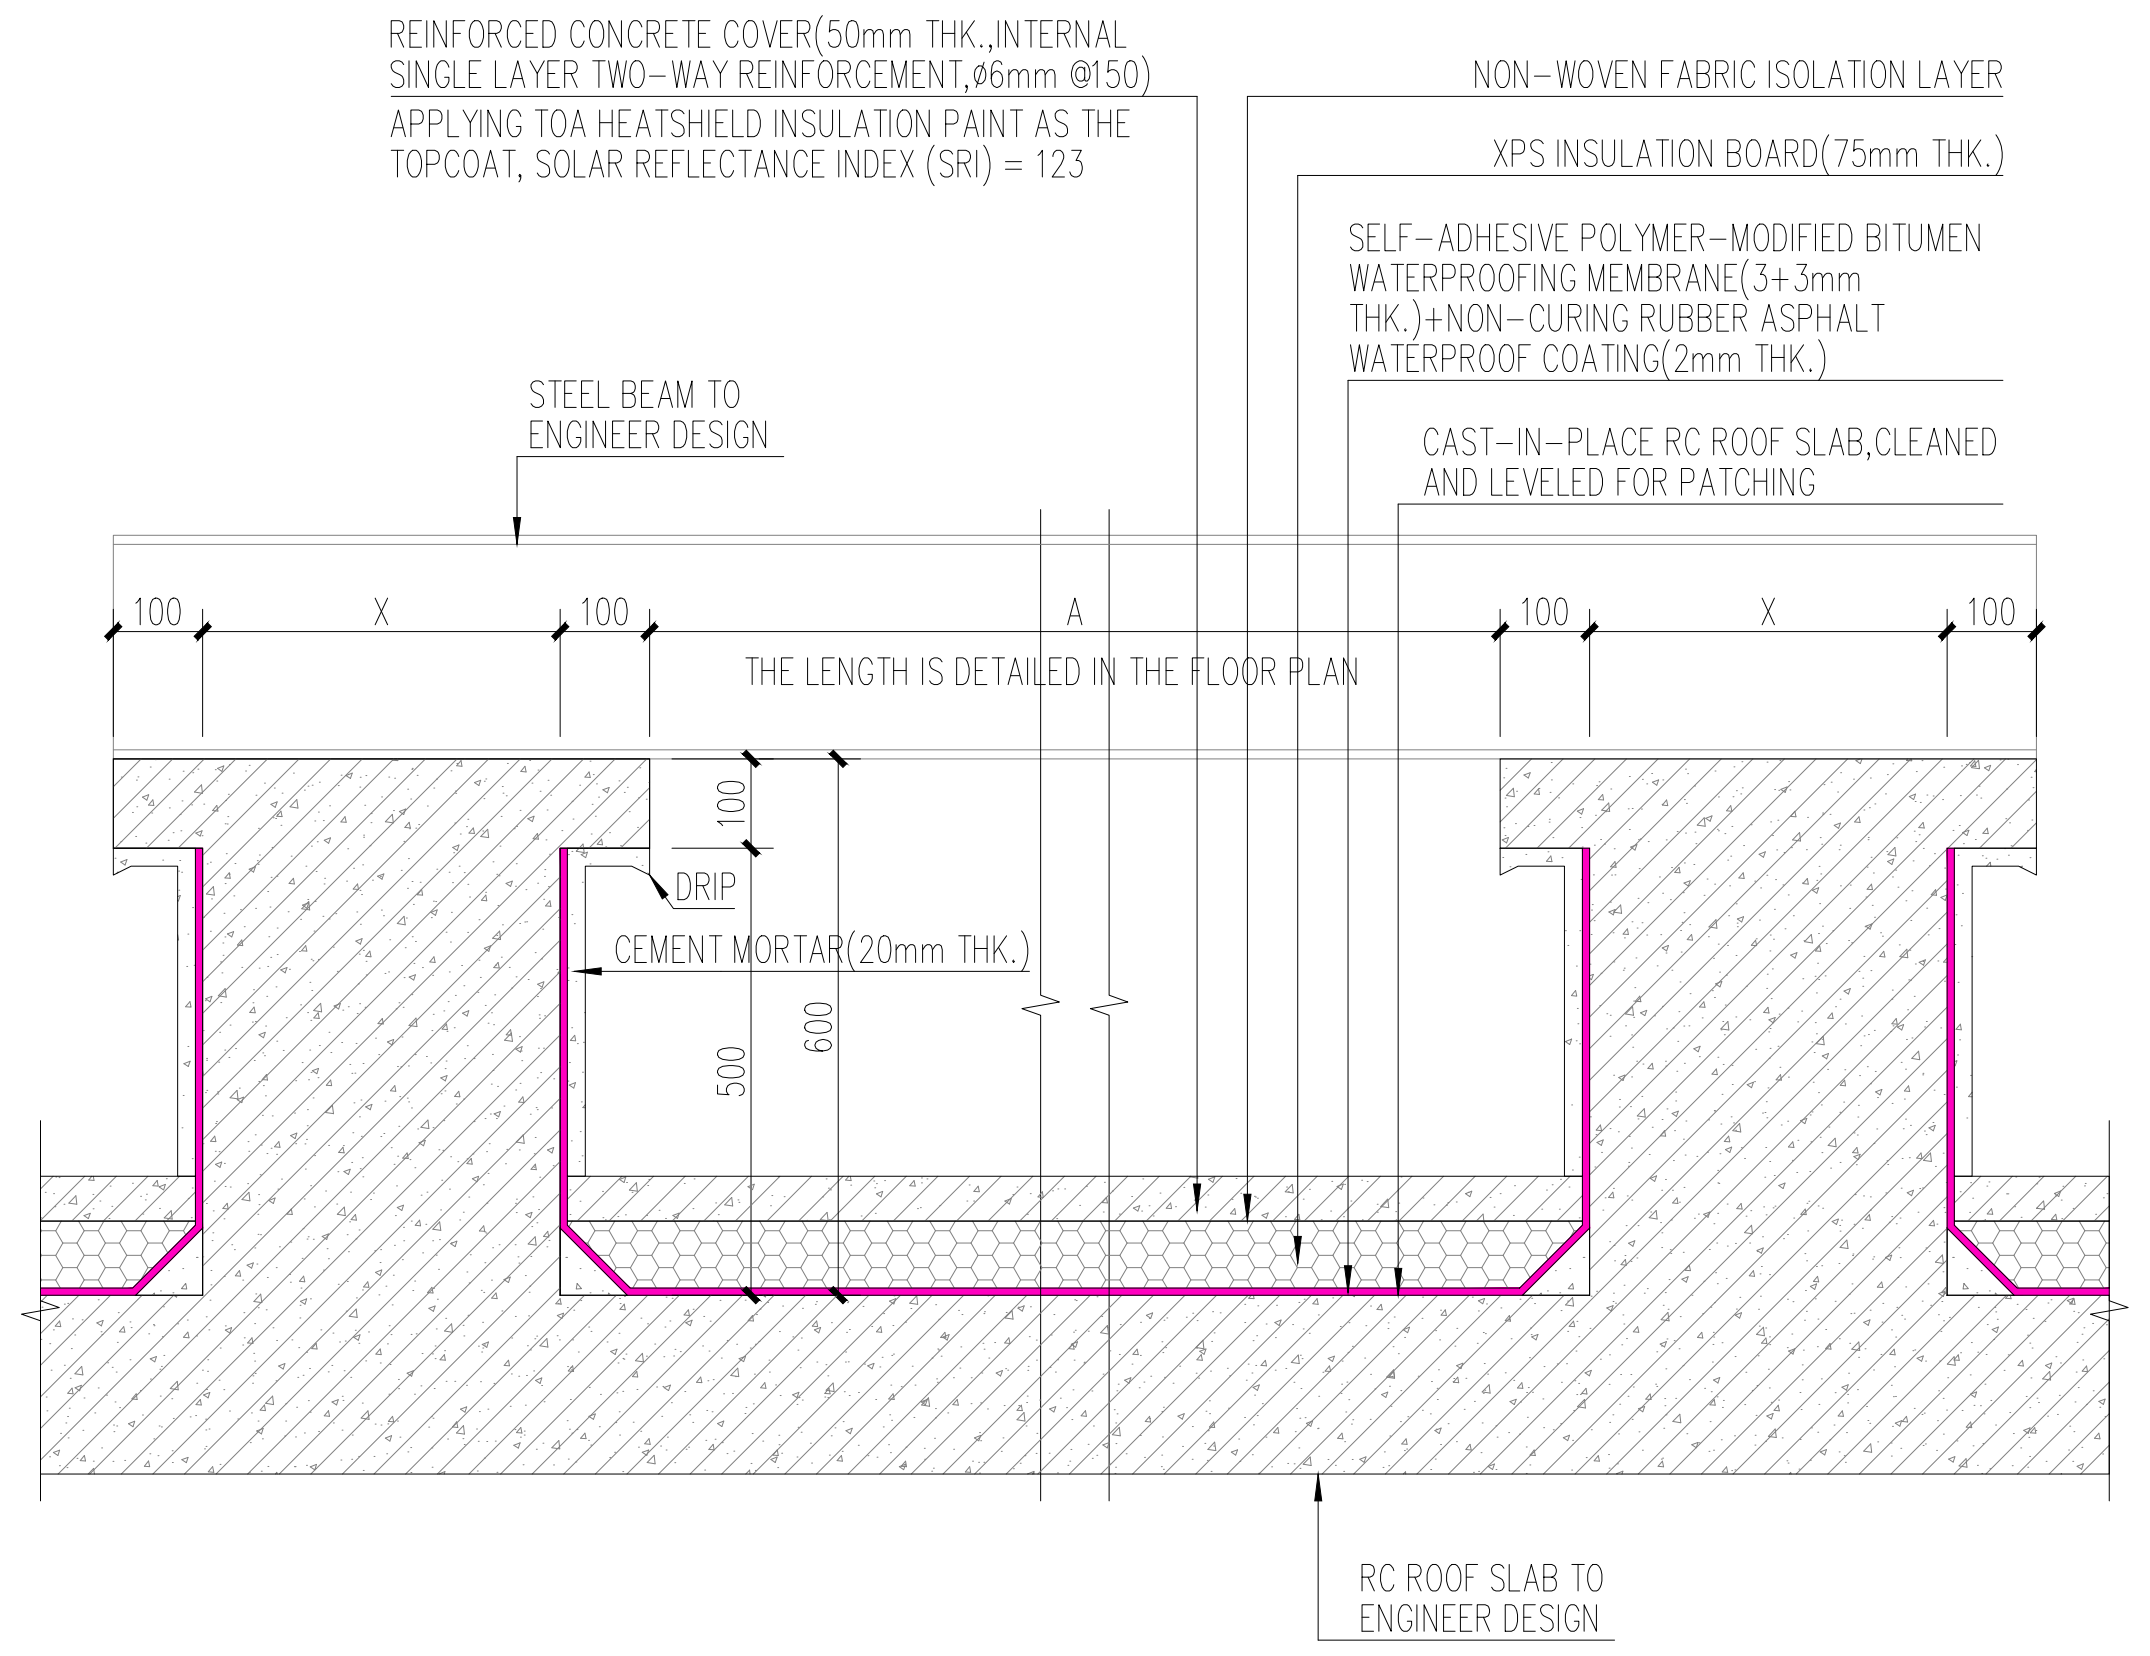
REINFORCED CONCRETE COVER(50mm THK.,INTERNAL SINGLE LAYER TWO-WAY REINFORCEMENT,ø6mm @150)
APPLYING TOA HEATSHIELD INSULATION PAINT AS THE TOPCOAT, SOLAR REFLECTANCE INDEX (SRI) = 123
NON-WOVEN FABRIC ISOLATION LAYER
XPS INSULATION BOARD(75mm THK.)
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN WATERPROOFING MEMBRANE(3+3mm THK.)+NON-CURING RUBBER ASPHALT WATERPROOF COATING(2mm THK.)
CAST-IN-PLACE RC ROOF SLAB,CLEANED AND LEVELED FOR PATCHING
STEEL BEAM TO ENGINEER DESIGN
100
X
100
A
100
X
100
THE LENGTH IS DETAILED IN THE FLOOR PLAN
100
DRIP
CEMENT MORTAR(20mm THK.)
500
600
RC ROOF SLAB TO ENGINEER DESIGN

R.C EQUIPMENT FOUNDATION DETAIL-03
Scale 1:10

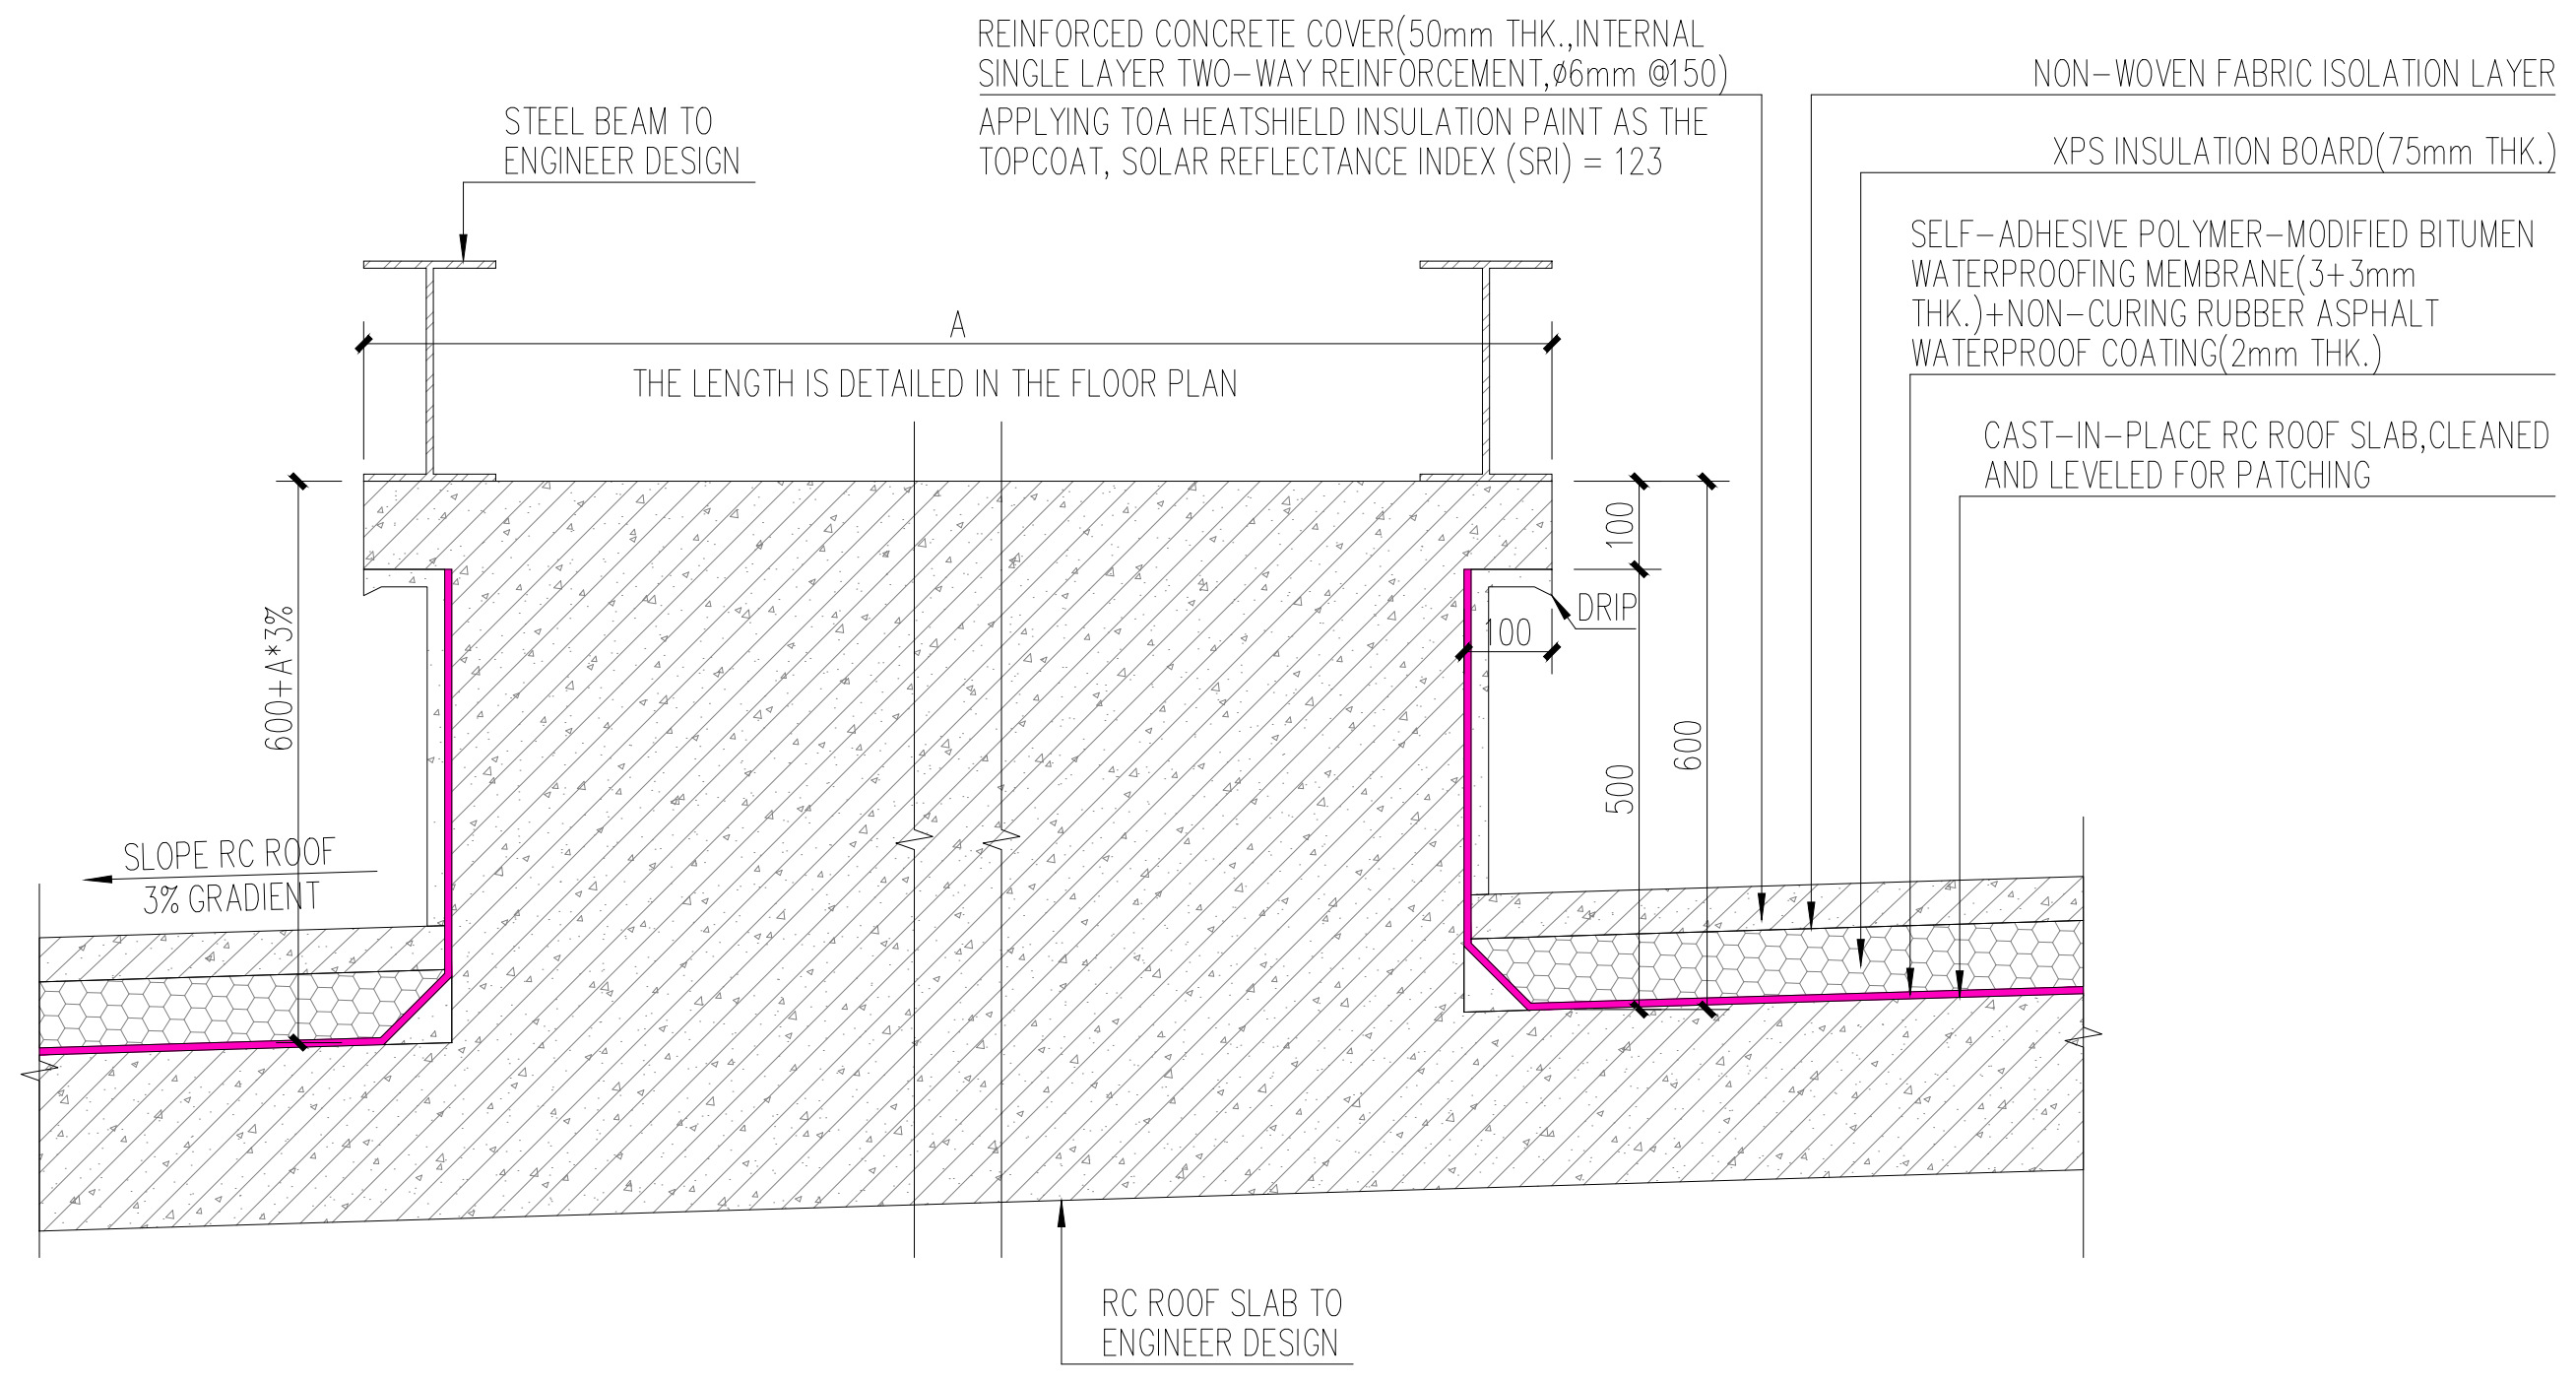
STEEL BEAM TO ENGINEER DESIGN
REINFORCED CONCRETE COVER(50mm THK.,INTERNAL SINGLE LAYER TWO-WAY REINFORCEMENT,ø6mm @150)
APPLYING TOA HEATSHIELD INSULATION PAINT AS THE TOPCOAT, SOLAR REFLECTANCE INDEX (SRI) = 123
NON-WOVEN FABRIC ISOLATION LAYER
XPS INSULATION BOARD(75mm THK.)
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN WATERPROOFING MEMBRANE(3+3mm THK.)+NON-CURING RUBBER ASPHALT WATERPROOF COATING(2mm THK.)
CAST-IN-PLACE RC ROOF SLAB,CLEANED AND LEVELED FOR PATCHING
A
THE LENGTH IS DETAILED IN THE FLOOR PLAN
600+A*3%
100
100
DRIP
500
600
SLOPE RC ROOF
3% GRADIENT
RC ROOF SLAB TO ENGINEER DESIGN

R.C EQUIPMENT FOUNDATION DETAIL-04
Scale 1:10

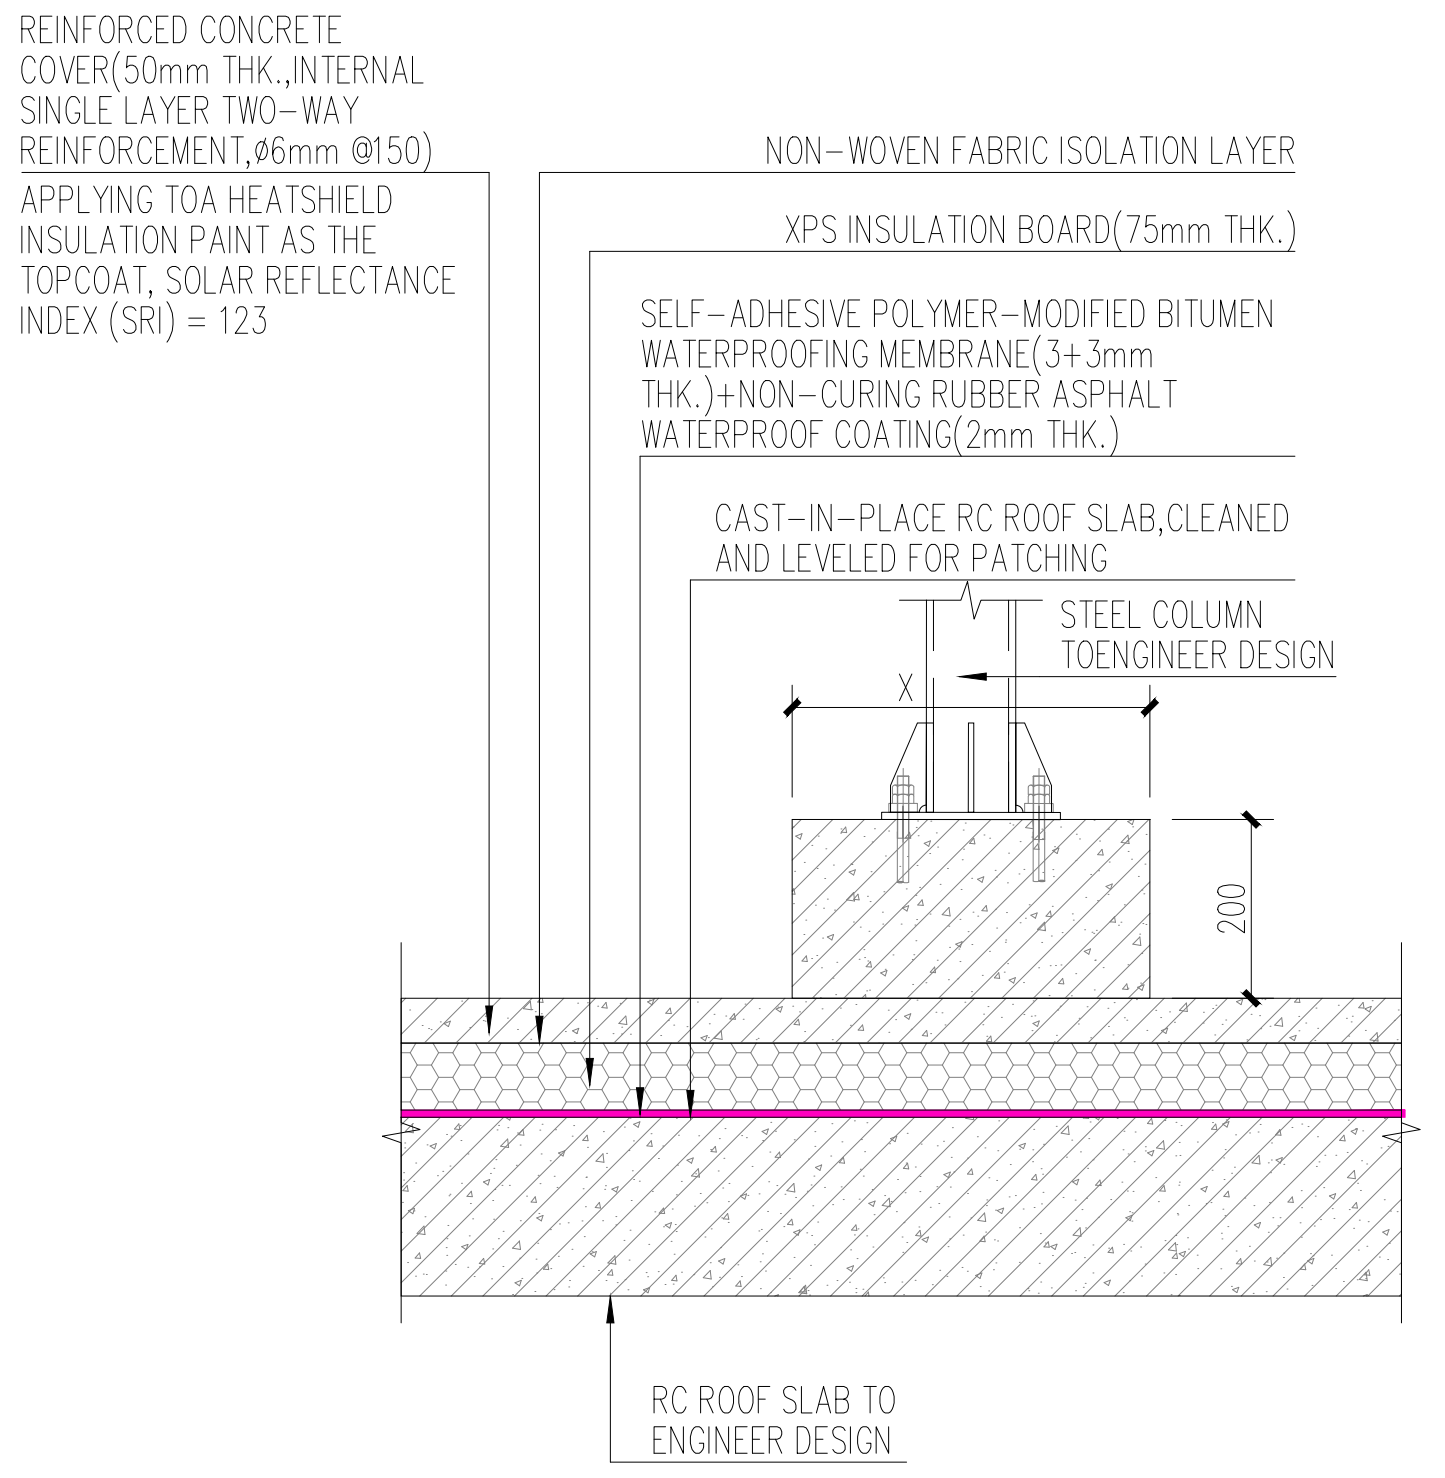
REINFORCED CONCRETE COVER(50mm THK.,INTERNAL SINGLE LAYER TWO-WAY REINFORCEMENT,ø6mm @150)
APPLYING TOA HEATSHIELD INSULATION PAINT AS THE TOPCOAT, SOLAR REFLECTANCE INDEX (SRI) = 123
NON-WOVEN FABRIC ISOLATION LAYER
XPS INSULATION BOARD(75mm THK.)
SELF-ADHESIVE POLYMER-MODIFIED BITUMEN WATERPROOFING MEMBRANE(3+3mm THK.)+NON-CURING RUBBER ASPHALT WATERPROOF COATING(2mm THK.)
CAST-IN-PLACE RC ROOF SLAB,CLEANED AND LEVELED FOR PATCHING
STEEL COLUMN TOENGINEER DESIGN
X
200
RC ROOF SLAB TO ENGINEER DESIGN

R.C EQUIPMENT FOUNDATION DETAIL-05
Scale 1:10

NOTE : THIS PRINT IS OF A CONFIDENTIAL NATURE, IT SHALL NOT BE TRACED,PHOTOGRAPHED,PHOTOSTATED OR REPRODUCED IN ANY MANER,NOR USED FOR ANY PURPOSE WHATSOEVER EXCEPT BY WRITTEN PERMISSION

CLIENT :
GULF EDGE DC 01
87 Wireless Road, M Thai Tower 11th. Floor, All Seasons Place, Lumpini,
Pathumwan, Bangkok 10330, Thailand

CONTRACTOR :
华西发展(泰国)有限公司
บริษัท หัวซือ ดีเวลลอปเม้นต์ (ประเทศไทย) จำกัด
HUASHI DEVELOPMENT CO.,LTD
No. 202, Room No. 1403, 14/F, Le Concorde Building,
Ratchadapisek Road, Huaykhwang Sub-District,
Huaykhwang District, Bangkok Metropolitan 10310.

CONSULTANT :
ARbay
บริษัท เอ อาร์ เบย์ จำกัด
ARbay Company Limited
31 st Floor Bangkok Insurance Building
25 South Sathorn road Thungmahamek
Sathorn Bangkok 10120 THAILAND
T +66 (0) 2286 8199
F +66 (0) 2286 2863
info@arbay.co.th

CONSULTANT :
Qbic Engineers & Architects Co.,Ltd.
8 Soi KALONG 4 SANAMBINNAM ROAD,
THASAI SUB-DISTRICT, MUANG NONTHABURI DISTRICT
, NONTHABURI.
Tel 662-950-4374
Fax 662-580-3231
E-Mail : qbic@qbic.co.th, www.qbic.co.th
QBIC ENGINEERS AND ARCHITECTS CO.,LTD.

CONSULTANT :
MITR
MITR TECHNICAL CONSULTANT CO.,LTD.
1168/8 12th FLOOR, LUMPINI TOWER BUILDING,
RAMA IV RD., THUNGMAHAMEK, SATHORN, BANGKOK 10120, THAILAND
TEL : 0-2679-9079-84
FAX : 0-2679-9085 E-mail: mitr_dd@mitr.com

Architect : SIGNATURE
ประกิต พนานุรัตน์ วสถ. 580
ที่อยู่
251/1 ถ.จารุเมือง แขวงรองเมือง เขตปทุมวัน
กรุงเทพมหานคร โทรศัพท์ 02-286-8199

Structural Engineer : SIGNATURE
วิศวกรผู้ออกแบบโครงสร้าง
ณัฐสม สงวนวงษ์ วย 1423
ที่อยู่
2/1 ซ.รามคำแหง 150 ถ.รามคำแหง
แขวง สะพานสูง เขต สะพานสูง กทม. 10240

Structural Inspector : SIGNATURE
วิศวกรผู้ตรวจสอบโครงสร้าง
โกมล จุฑาภัทร วย 964
ที่อยู่
24/18 ซ.นวมินทร์ 129 ถ. นวมินทร์
แขวง นวลจันทร์ เขต บึงกุ่ม กทม. 10230

Electrical Engineer : SIGNATURE
วิศวกรผู้ออกแบบระบบไฟฟ้ากำลัง
นายสุภัทร บูรณวิทย์ วฟก.1265
ที่อยู่
21 ซอยทานสัมฤทธิ์ 13
ตำบลท่าทราย อ.เมืองนนทบุรี จ.นนทบุรี 11000

Mechanical Engineer : SIGNATURE
วิศวกรผู้ออกแบบระบบเครื่องกลและปรับอากาศ
นายประสิทธิ์ เกียวสุนทร วก.1221
ประสิทธิ์
ที่อยู่
44/372 ซอยบางกระดี่ 35/1 แขวงแสมดำ
เขตบางขุนเทียน กทม. 10150

Sanitary Engineer : SIGNATURE
วิศวกรผู้ออกแบบระบบสุขาภิบาล และดับเพลิง
นายทศวรรษ สนั่นฤทธิ์ วส. 215
ทศวรรษ
ที่อยู่
บ้านเลขที่ 99/107 หมู่ที่ 3 ต.ศีรษะจรเข้น้อย
อ.บางเสาธง จ.สมุทรปราการ 10540

ISSUE/REVISION

REV.	DESCRIPTION	DATE
A	90% DEVELOPED	09/05/2026

PROJECT NAME :
GEDC 01
LOCATION:
Nikhom Phattana district, Rayong ,industrial estate,CPGC

BUILDING :
MAIN BUILDING

90% DEVELOPED

TITLE :
WATERPROOFING DETAILS B

JOB NO.
SCALE 1:20
DRAWN FLY
REF.
CHECKED LJC
DWG.NO. MPK01A-90-A-WD-002
APPROVED LXD
DATE 2026.05.09