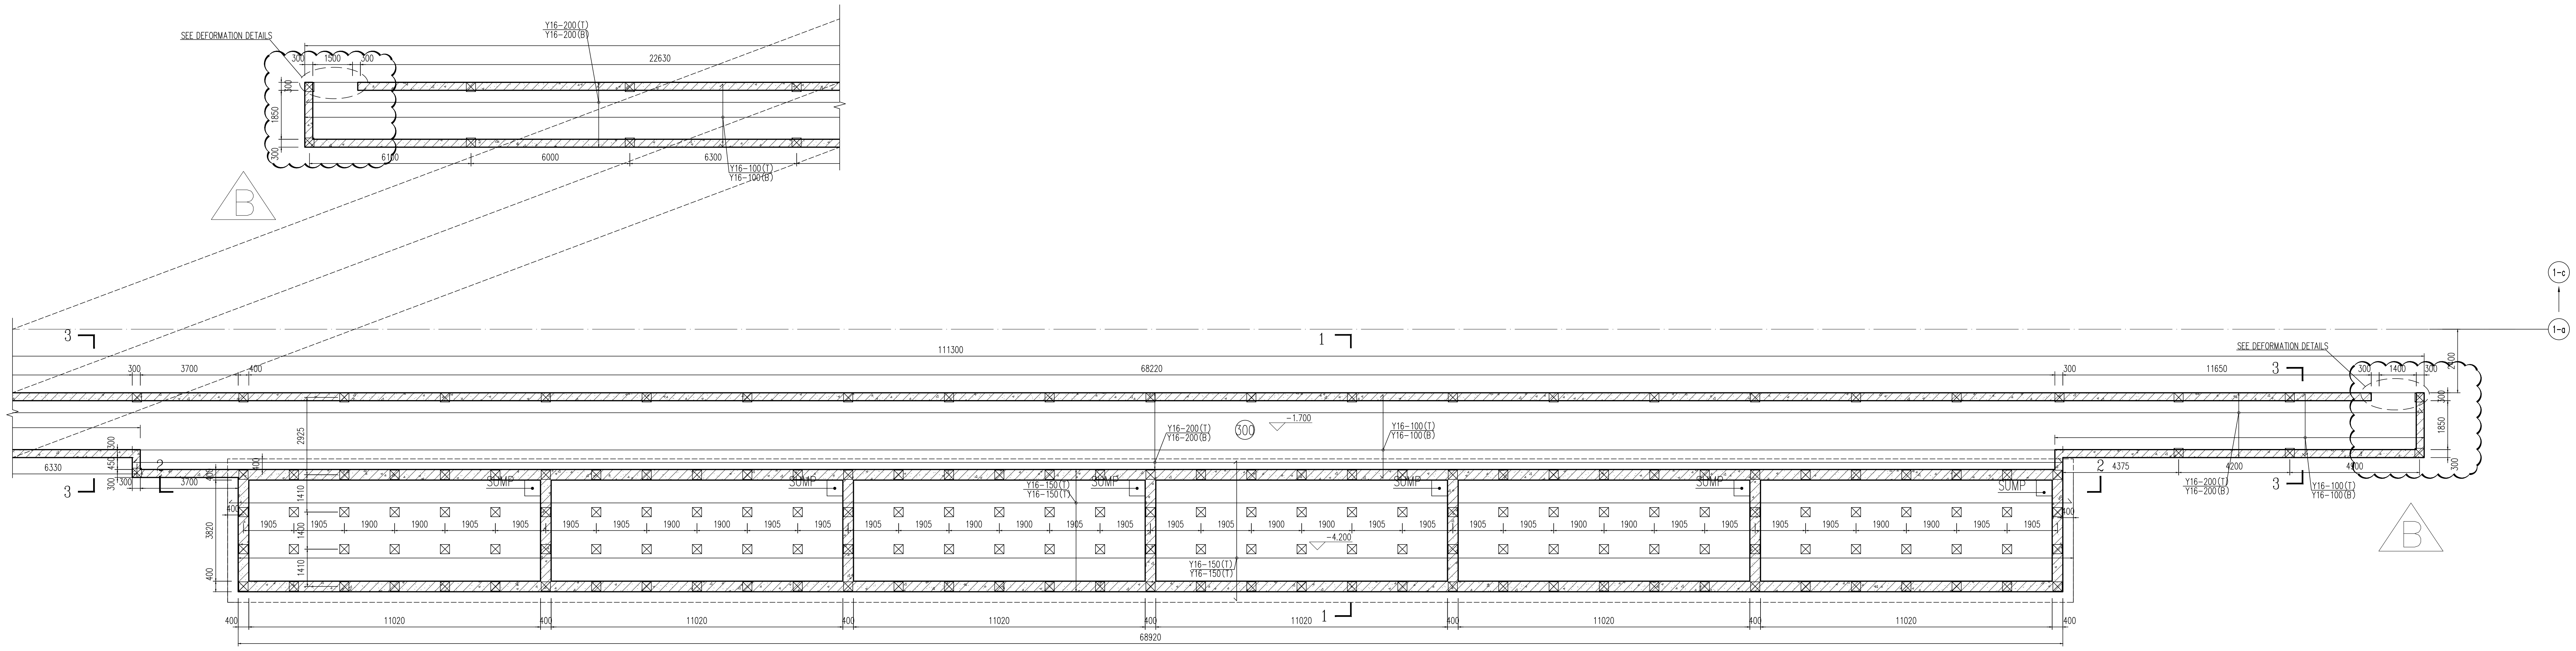

UNDERGROUND 45,000L FUEL TANK BOTTOM LEVEL PLAN

UNLESS OTHERWISE STATED. 1:100

1.ALL SLAB THICKNESS SHALL BE 600mm THK. (300) DENOTES SLAB THICKNESS.

THE PILE SHALL BE AS PER FOLLOWING:

DRIVEN SQUARE PILE SCHEDULE

LEGEND	PILE SIZE (mm)	WORKING CAPACITY (KN)		ESTIMATED PILE TOE LEVEL	PILE QUANTITY	LOW-STRAIN INTEGRITY INTEGRITY TEST	HIGH STRAIN DYNAMIC LOAD TEST
☒	350x350	500KN/50ton(COMPRESSION)	60KN/6ton(UPLIFT)	-11.500	Building A:185 Building B:185	Building A:37 Building B:37	Building A:4 Building B:4

1. ALL PILES SHALL BE DRIVEN TO SET. PILE LENGTH IS MEANT FOR COST ESTIMATION ONLY.
2. THE FINAL HOLE CONDITION SHOULD BE BASED ON FINAL BLOWS.
3. THE SAFETY FACTOR OF PILE IS 2.50.
4. PILE CONCRETE GRADE(CYLINDER@28DAYS)>=350KSC.
5. THE CUT-OFF LEVEL OF PILE TOPS SHALL BE AS SHOWN IN DETAIL 1.
6. NO LESS THAN 3 LONGITUDINAL REBARS SHALL BE TAKEN FROM THE PILES AND SENT TO THE LABORATORY FOR TENSILE MECHANICAL PROPERTY TESTS. THE TEST RESULTS MUST MEET THE PERFORMANCE REQUIREMENTS FOR SD40 (SD40T) REINFORCING STEEL BARS.
7. JACKING PILE METHOD SHOULD BE USED TO AVOID VIBRATION FROM DRIVE PILE CONSTRUCTION.

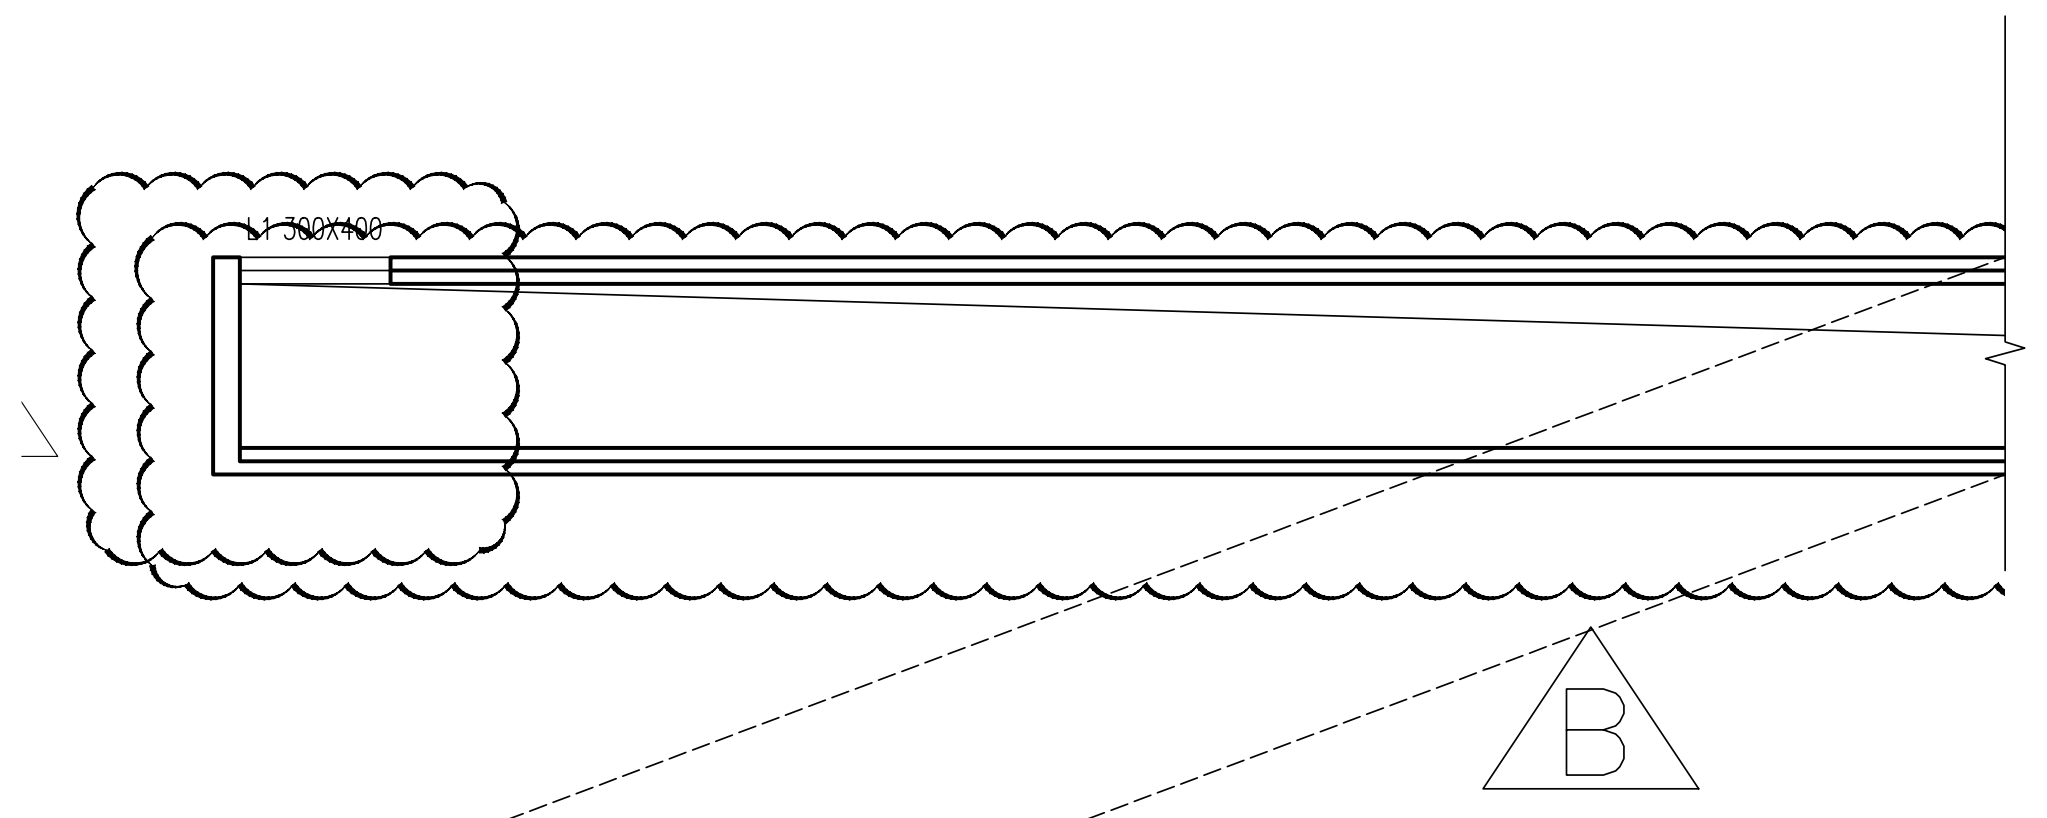

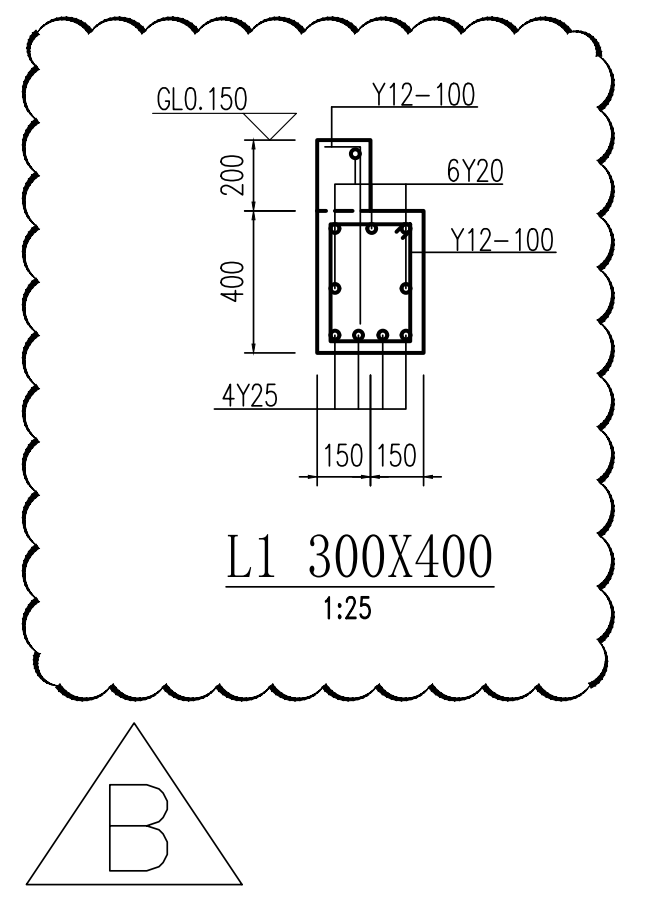

L1 300X400
1:25

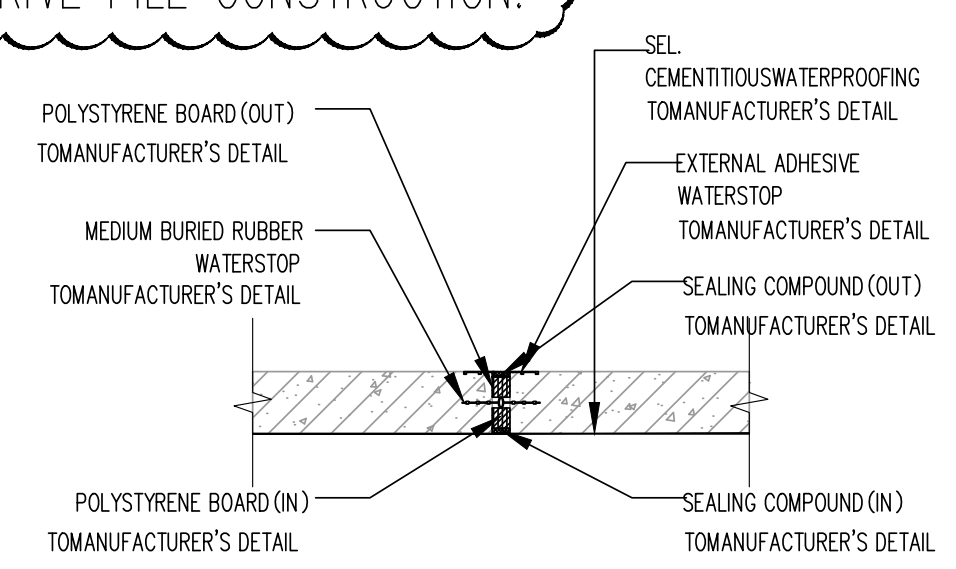

40,000L FUEL TANK WATERPROOFING FOR ROOF PANEL AND EXTERIOR WALL DEFORMATION DETAILS

FOR CONNECTING BUILDING A & B

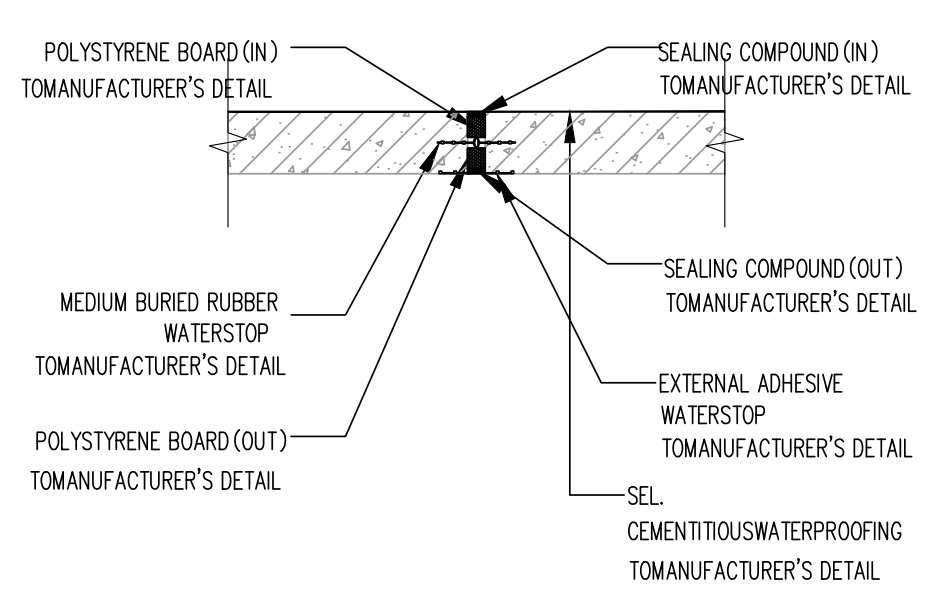

40,000L FUEL TANK WATERPROOFING FOR BOTTOM PLATE DEFORMATION DETAILS

FOR CONNECTING BUILDING A & B

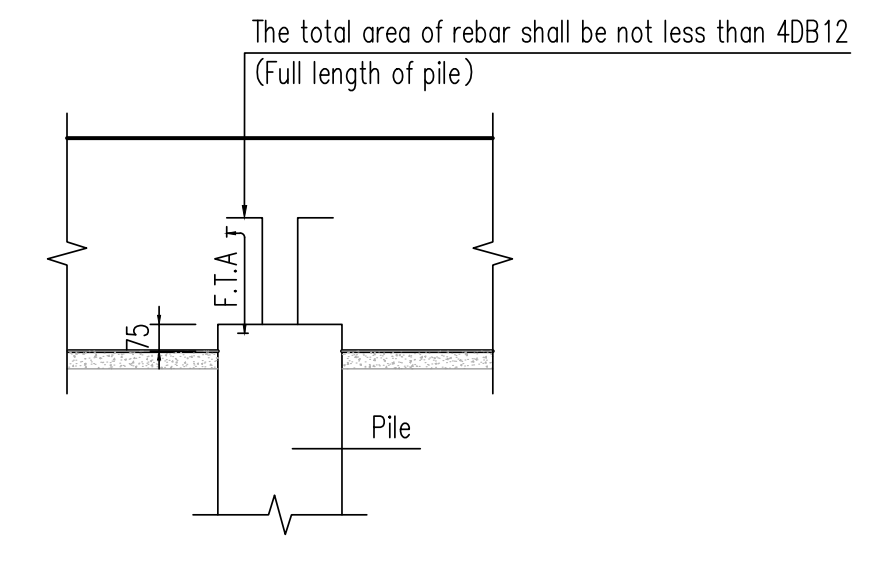

DETAIL 1 1:25

Detail drawing of top connection of pile

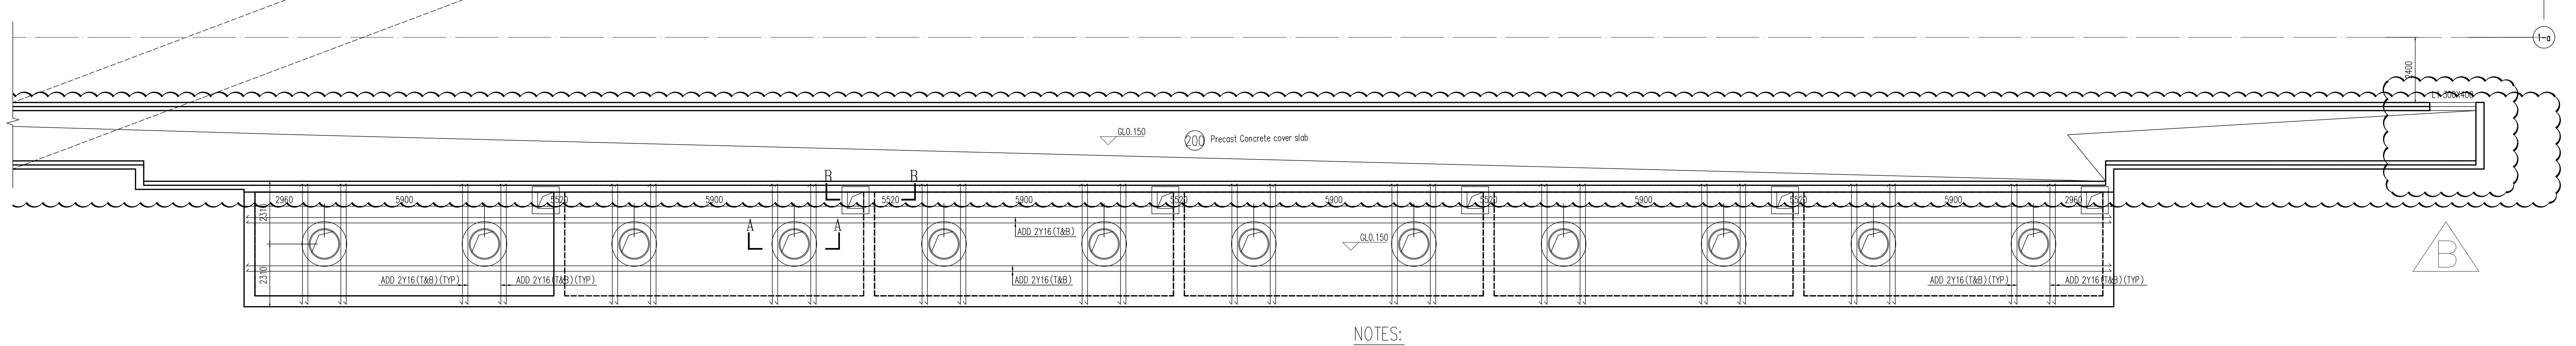

UNDERGROUND 45,000L FUEL TANK ROOF LEVEL PLAN

1:100

UNLESS OTHERWISE STATED:

1.ALL SLAB THICKNESS SHALL BE 400mm THK.

2.ALL Precast SLAB THICKNESS SHALL BE 200mm THK.

3.THE SLAB THROUGHOUT REINFORCING DETAIL SECTION

NOTES:

1. ALL STRUCTURAL COMPONENTS (EXCEPT FOR THE PILES) CONCRETE GRADE SHALL BE 350KSC(CYLINDER@28DAYS)WATER PROOFING ADMIXTURE,REINFORCING GRADE SD40.
2. INNER & OUTER SIDES, BOTH SIDES OF INTERNAL WALLS, FRONT & REAR SIDES, LEFT & RIGHT SIDES SHALL BE BACKFILLED SIMULTANEOUSLY, WITH A HEIGHT DIFFERENCE NOT EXCEEDING 1M.
3. TO REFER M&E FUEL TANK DRAWINGS FOR ALL PIPE & SLAB OPENING LOCATION.
4. BACKFILL SHALL BE WITH CHIPPING STONE AS PER M&E REQUIREMENTS.
5. CONTRACTOR TO SUBMIT METHOD OF EXCAVATION FOR CONSULTANT APPROVAL.
6. ALL CONCRETE COVER IS 40MM. OUTER FACES AND BOTTOM OF RAFT SLAB ARE 75MM.
7. FUEL TANKS ARE PROVIDED IN BOTH BUILDING A AND BUILDING B, LOCATION AS PER ARCHITECTURAL DRAWINGS.

NOTE : THIS PRINT IS OF A CONFIDENTIAL NATURE, IT SHALL NOT BE TRACED,PHOTOGRAPHED,PHOTOSTATED OR REPRODUCED IN ANY MANER,NOR USED FOR ANY PURPOSE WHATSOEVER EXCEPT BY WRITTEN PERMISSION

CLIENT :
GULF EDGE DC 01
87 Wireless Road, M Thai Tower 11th. Floor, All Seasons Place, Lumpini, Pathumwan, Bangkok 10330, Thailand

CONTRACTOR :
华西发展(泰国)有限公司
บริษัท หัวซือ ดีเวลลอปเม้นต์ (ประเทศไทย) จำกัด
HUASHI DEVELOPMENT CO.,LTD
No. 202, Room No. 1403, 14/F, Le Concorde Building,
Ratchadapisek Road, Huaykhwang Sub-District,
Huaykhwang District, Bangkok Metropolitan 10310.

CONSULTANT :
ARbay
บริษัท เอ อาร์ เบย์ จำกัด
ARbay Company Limited
31 st Floor Bangkok Insurance Building
25 South Sathorn road Thungmahamek
Sathorn Bangkok 10120 THAILAND
T +66 (0) 2286 8199
F +66 (0) 2286 2863
info@arbay.co.th

CONSULTANT :
Qbic Engineers & Architects Co.,Ltd.
8 Soi KALONG 4 SANAMBINNAM ROAD,
THASAI SUB-DISTRICT, MUANG NONTHABURI DISTRICT
, NONTHABURI.
Tel 662-950-4374
Fax 662-580-3231
E-Mail : qbic@qbic.co.th, www.qbic.co.th
QBIC ENGINEERS AND ARCHITECTS CO.,LTD.

CONSULTANT :
MITR
MITR TECHNICAL CONSULTANT CO.,LTD.
1168/8 12th FLOOR, LUMPINI TOWER BUILDING,
RAMA IV RD., THUNGMAHAMEK, SATHORN, BANGKOK 10120, THAILAND
TEL : 0-2679-9079-84
FAX : 0-2679-9085 E-mail: mitr_dd@mitr.com

Architect : SIGNATURE
ประกิต พนานุรัตน์ วสถ. 580
ที่อยู่
251/1 ถ.จารุเมือง แขวงรองเมือง เขตปทุมวัน
กรุงเทพมหานคร โทรศัพท์ 02-286-8199

Structural Engineer : SIGNATURE
วิศวกรผู้ออกแบบโครงสร้าง
ณัฐสม สงวนวงษ์ วย 1423
ที่อยู่
2/1 ซ.รามคำแหง 150 ถ.รามคำแหง
แขวง สะพานสูง เขต สะพานสูง กทม. 10240

Structural Inspector : SIGNATURE
วิศวกรผู้ตรวจสอบโครงสร้าง
โกมล จุฑาภัทร วย 964
ที่อยู่
24/18 ซ.นวมินทร์ 129 ถ. นวมินทร์
แขวง นวลจันทร์ เขต บึงกุ่ม กทม. 10230

Electrical Engineer : SIGNATURE
วิศวกรผู้ออกแบบระบบไฟฟ้ากำลัง
นายสุภัทร บูรณวิทย์ วฟก.1265
ที่อยู่
21 ซอยทานสัมฤทธิ์ 13
ตำบลท่าทราย อ.เมืองนนทบุรี จ.นนทบุรี 11000

Mechanical Engineer : SIGNATURE
วิศวกรผู้ออกแบบระบบเครื่องกลและปรับอากาศ
นายประสิทธิ์ เกียวสุนทร วก.1221
ที่อยู่
44/372 ซอยบางกระดี 35/1 แขวงแสมดำ
เขตบางขุนเทียน กทม. 10150
ประสิทธิ์

Sanitary Engineer : SIGNATURE
วิศวกรผู้ออกแบบระบบสุขาภิบาล และดับเพลิง
นายทศวรรษ สนันฤทธิ์ วส. 215
ที่อยู่
บ้านเลขที่ 99/107 หมู่ที่ 3 ต.ศีรษะจรเข้น้อย
อ.บางเสาธง จ.สมุทรปราการ 10540
ทศวรรษ

ISSUE/REVISION

REV.	DESCRIPTION	DATE
A	IFC	07/04/2026
B	IFC	27/04/2026

PROJECT NAME :
GEDC 01
LOCATION:
Nikhom Phattana district, Rayong ,industrial estate,CPGC

BUILDING :
FUEL TANK

IFC

TITLE :
UNDERGROUND FUEL TANK FLOOR PLANS

JOB NO.	SCALE
DRAWN	REF.
CHECKED YC	DWG.NO. MPK00-IFC-F-GN-007
APPROVED ZJ	
DATE 2026.04.27	

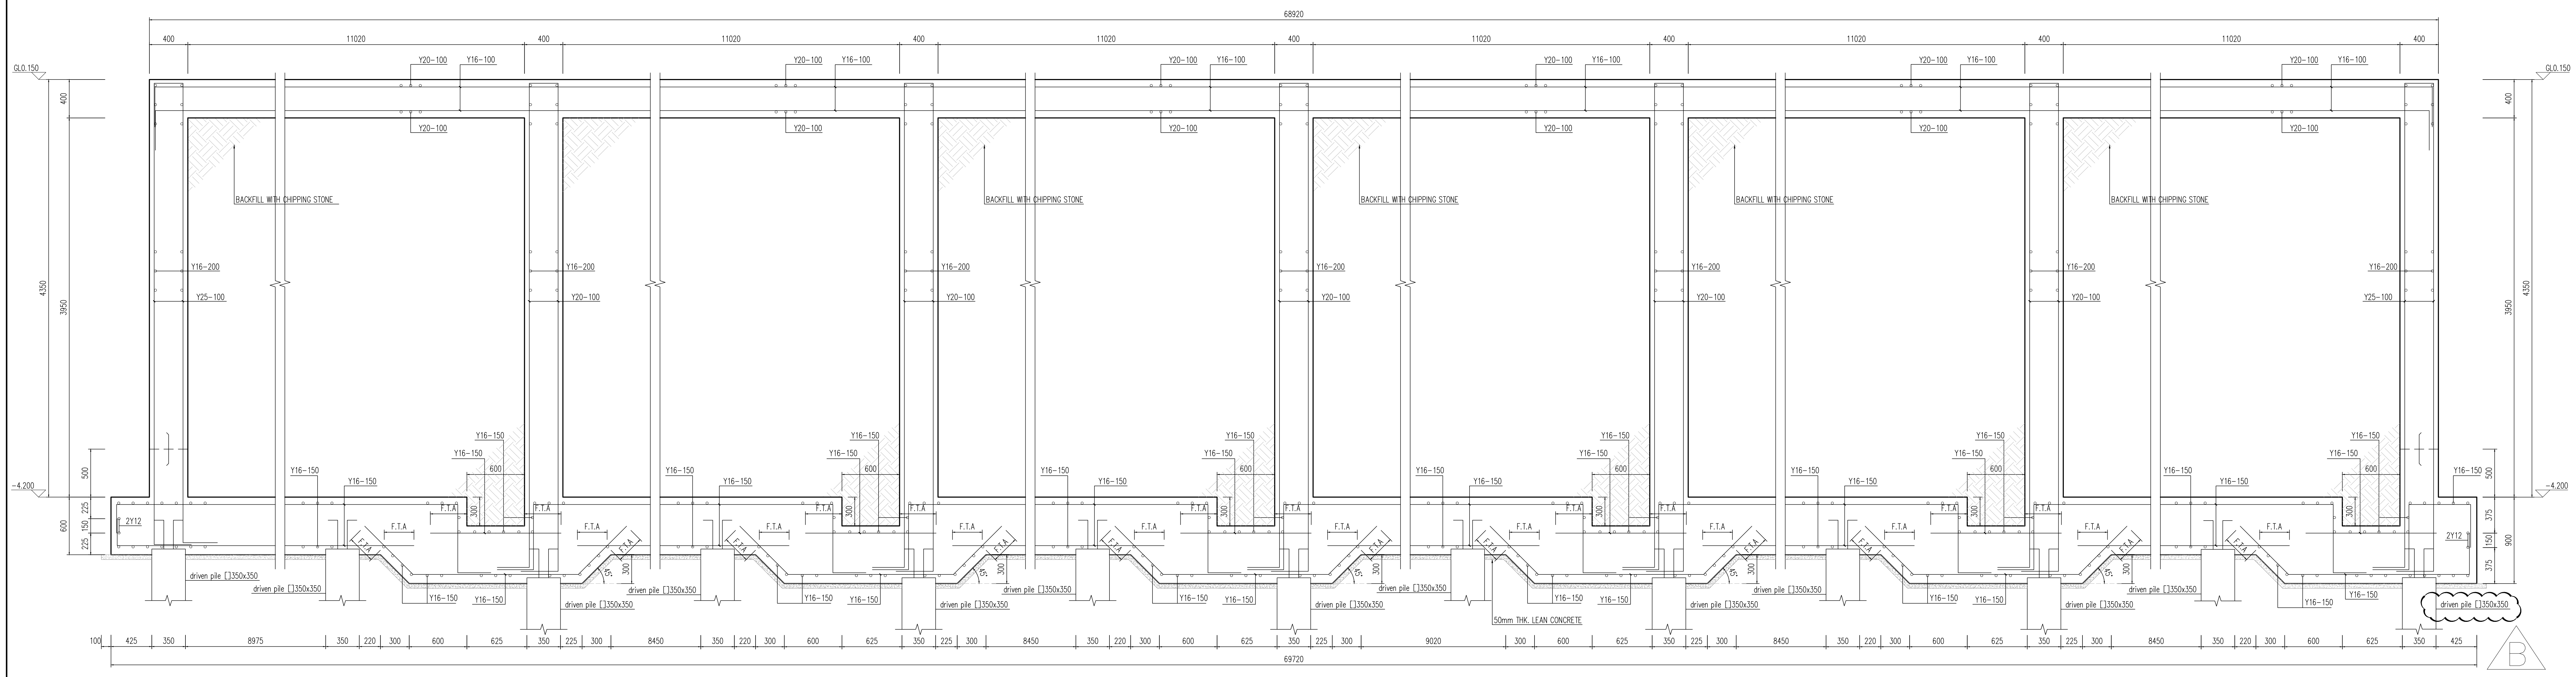

SECTION 2-2

1:25

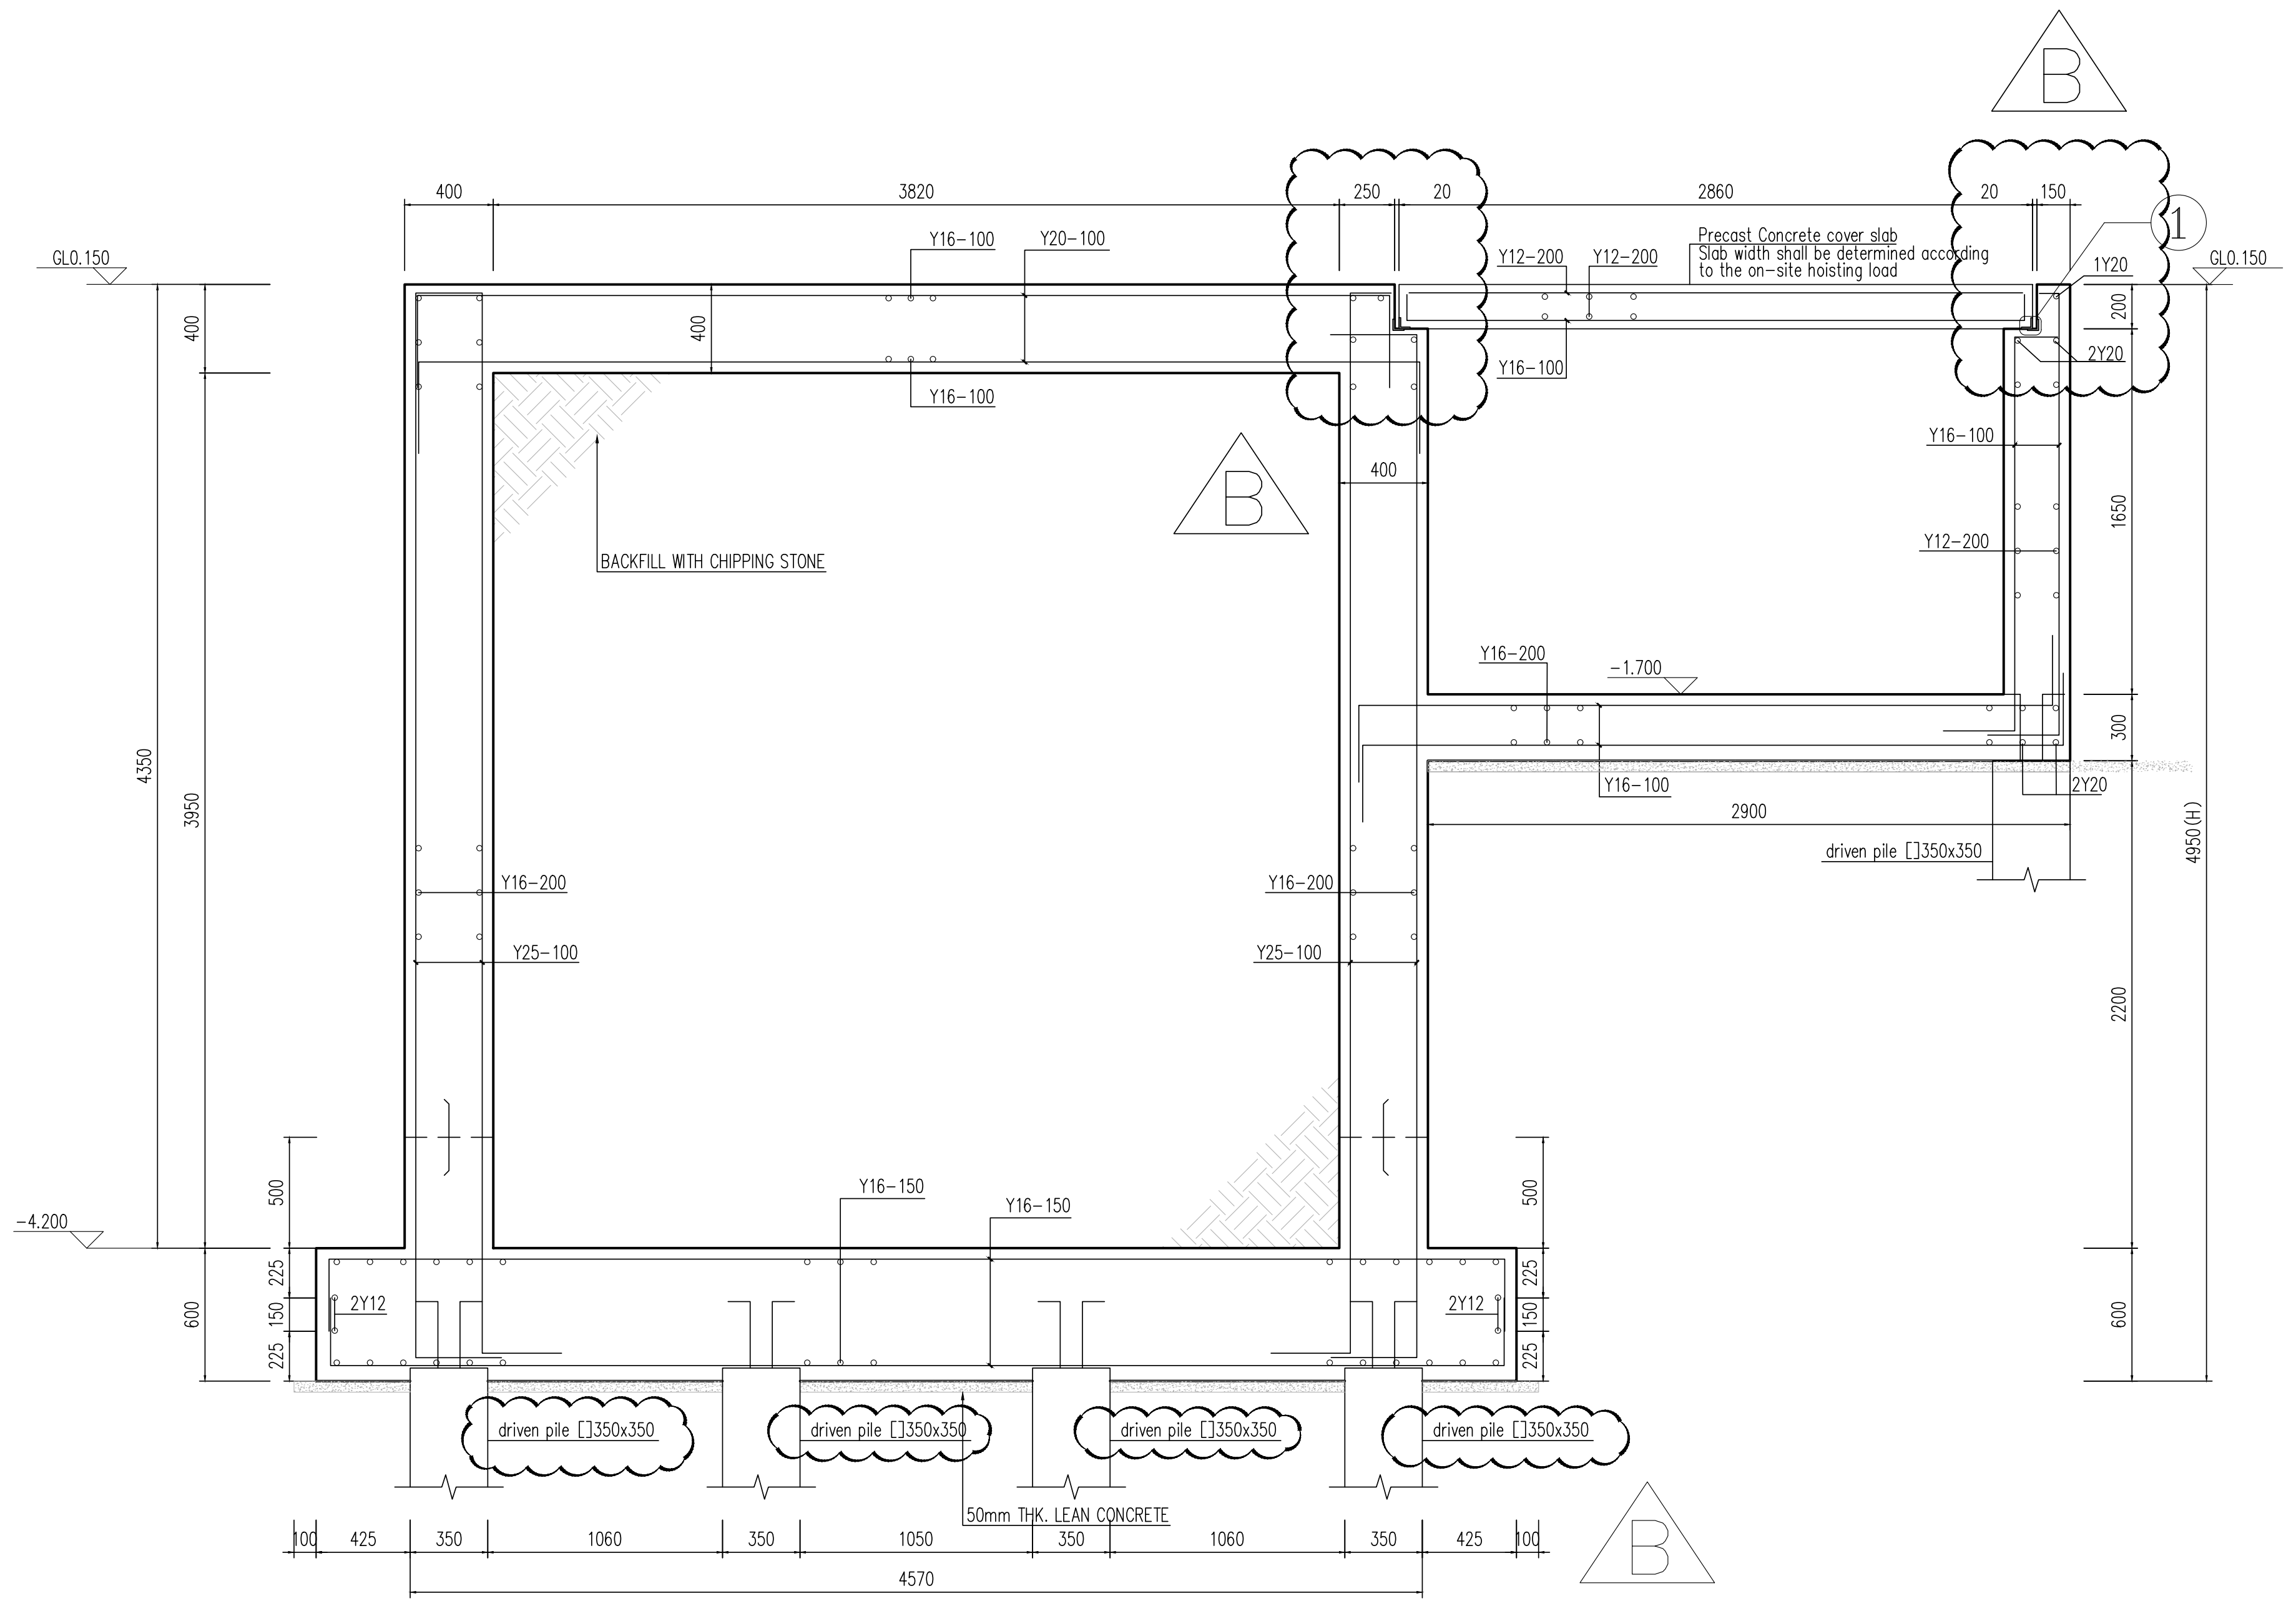

SECTION 1-1

1:25

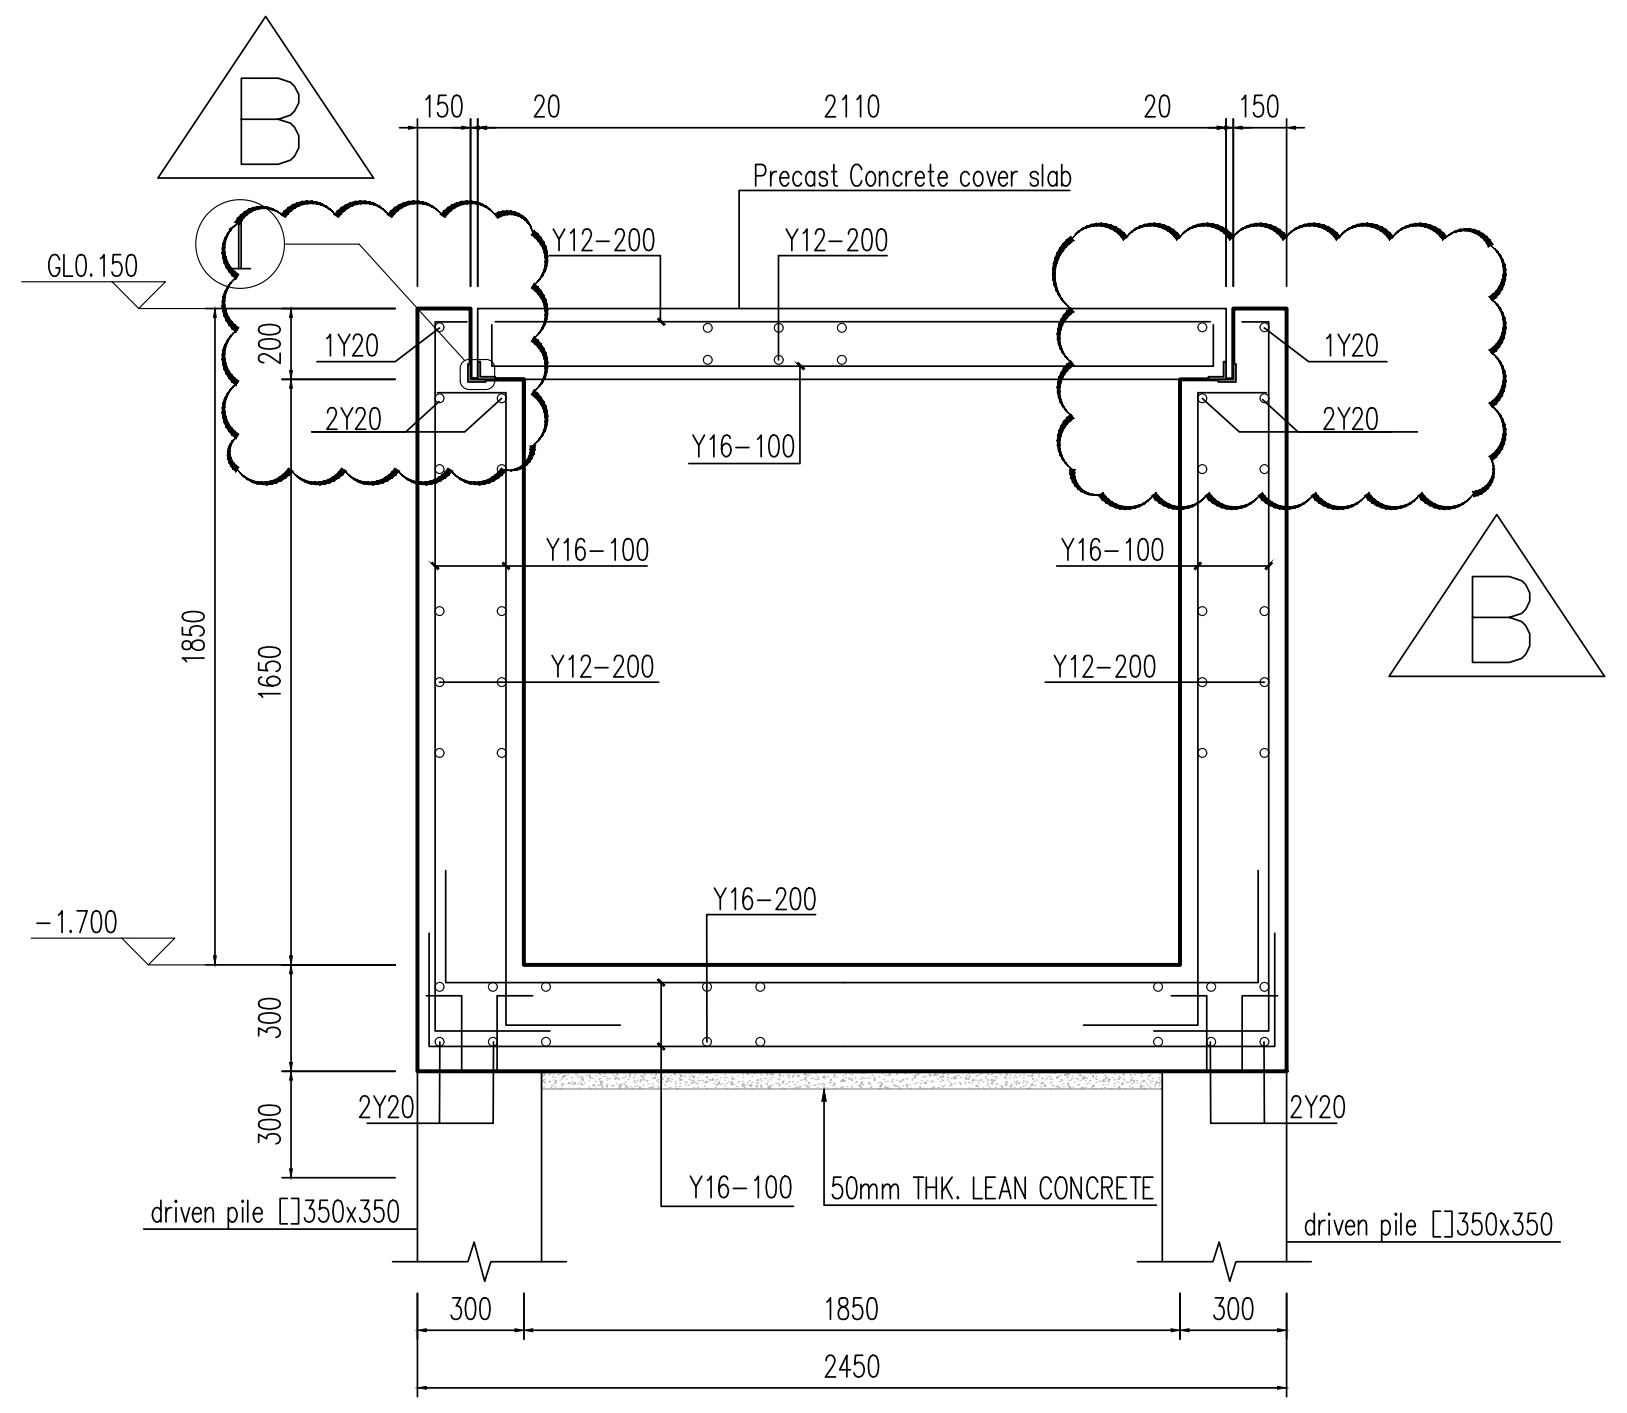

SECTION 3-3

1:25

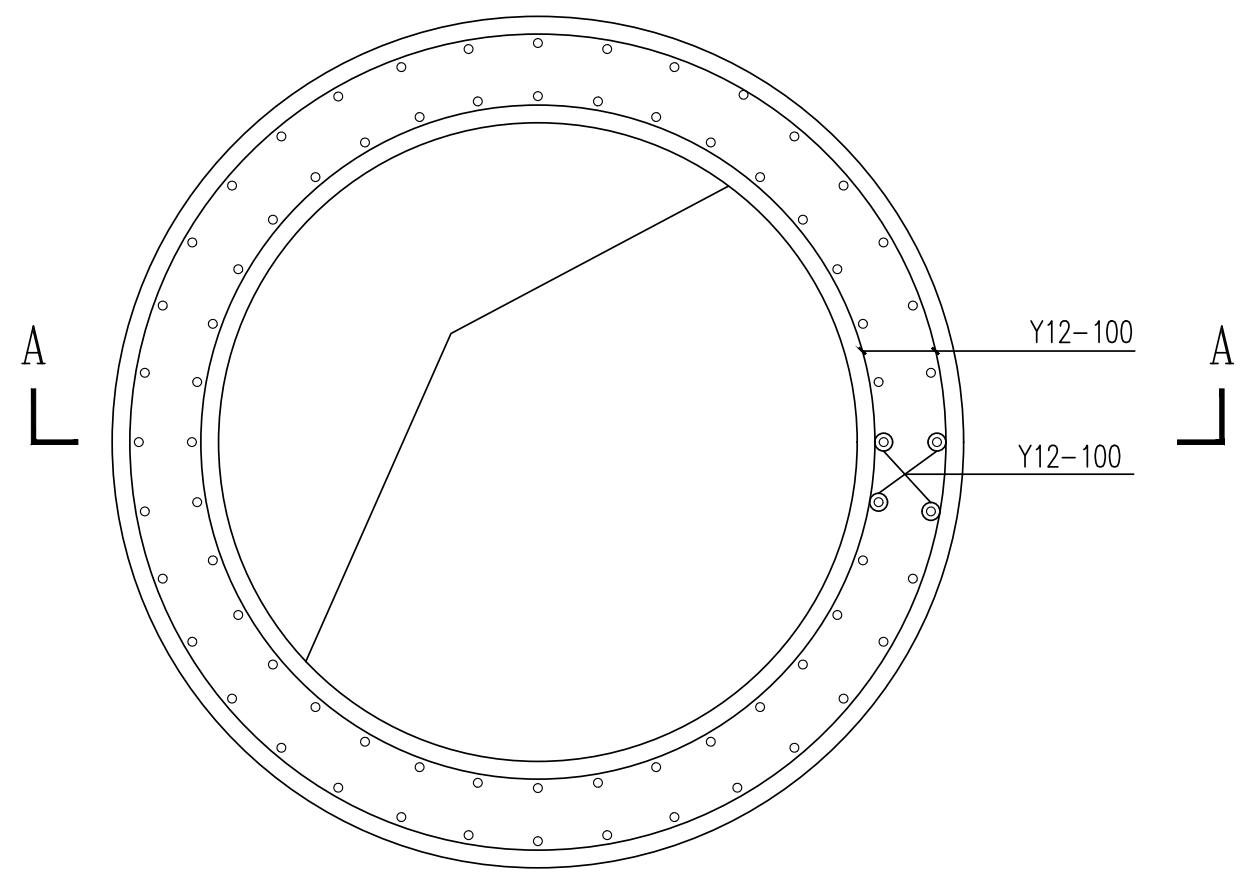

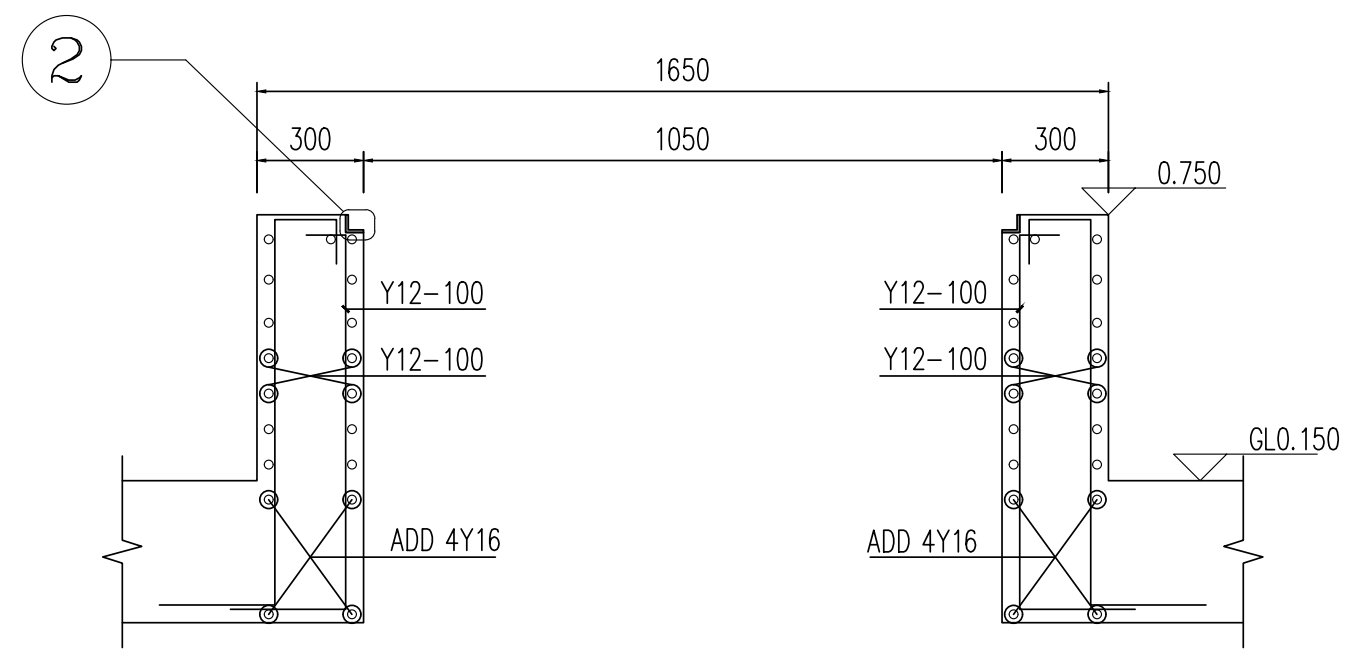

SECTION A-A

1:25

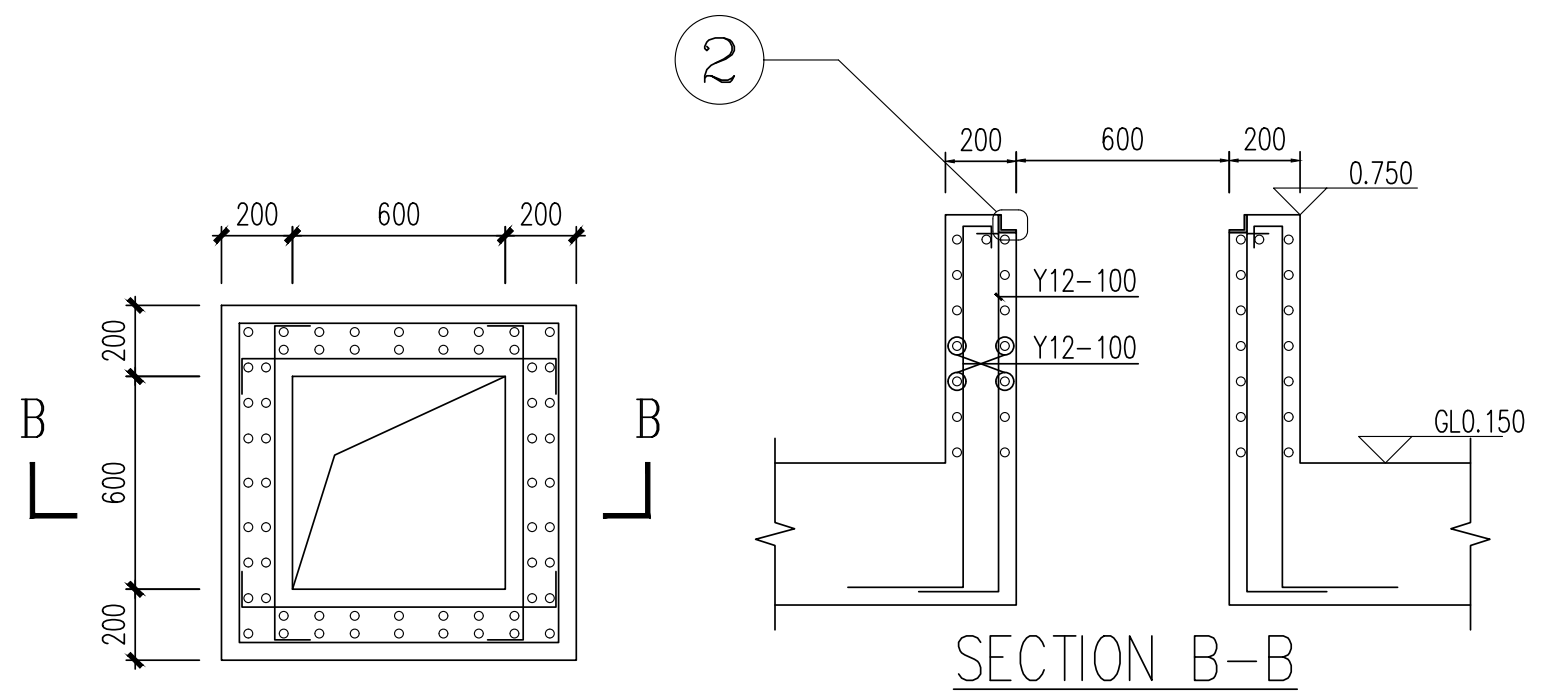

SECTION B-B

1:25

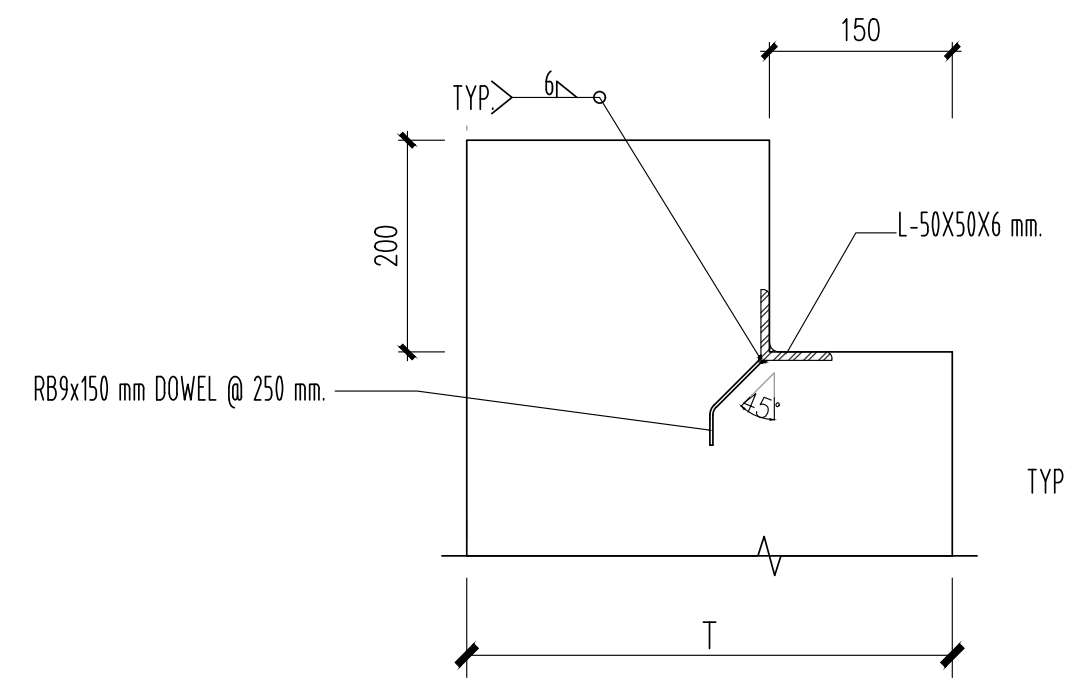

DETAIL 1

N.T.S.

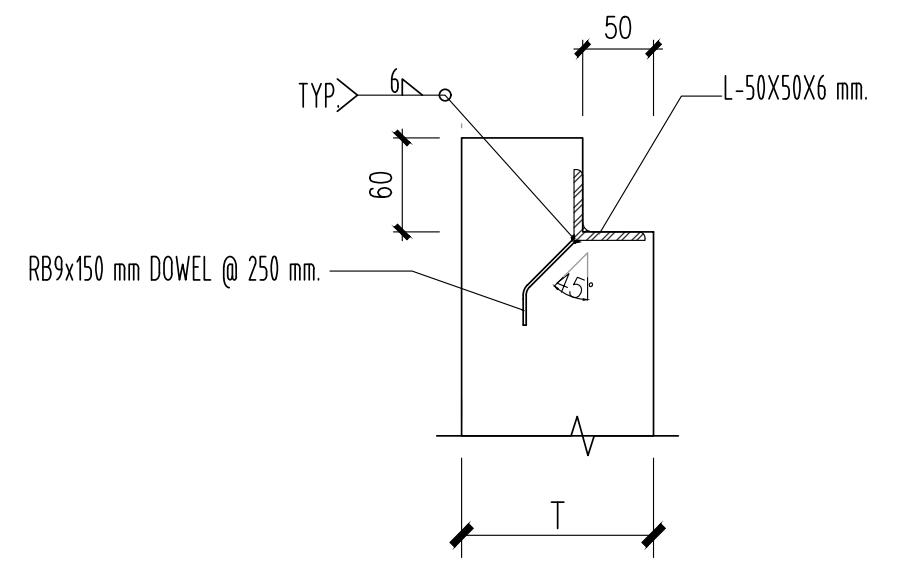

DETAIL 2

N.T.S.

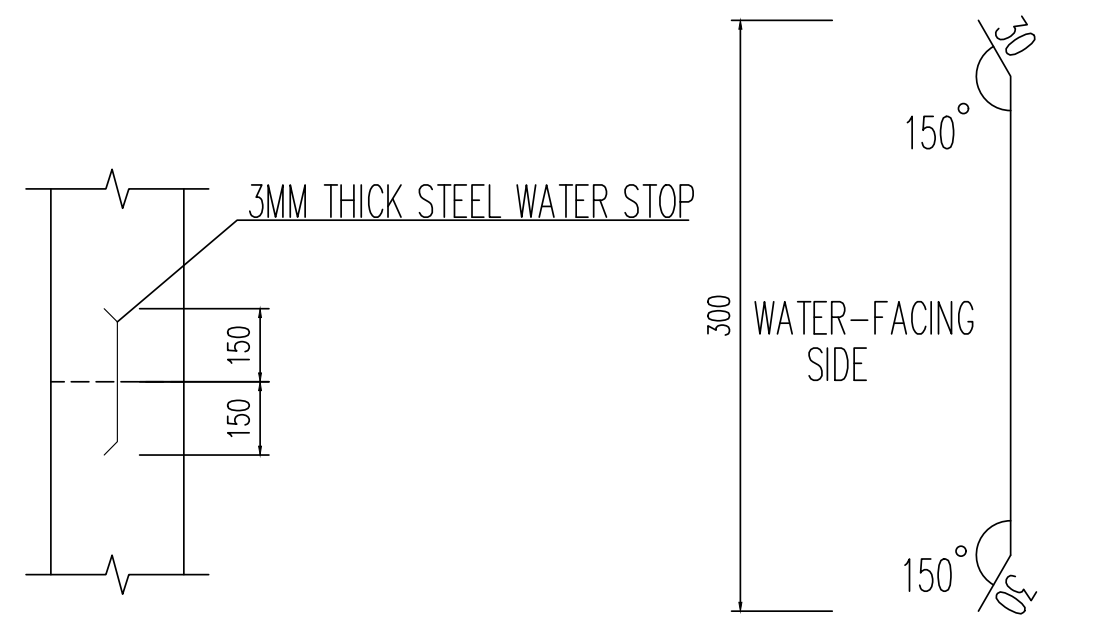

STEEL WATER STOP DETAIL

NOTES: (UNLESS OTHERWISE STATED)

1. ALL ADDITIONAL REINFORCEMENT SHALL REFER TO FOUNDATION LAYOUT PLAN
2. BACKFILL WITH CHIPPING STONE AS PER M&E REQUIREMENTS.
3. H=HEIGHT OF TANK.

CLIENT :

GULF EDGE DC 01

87 Wireless Road, M Thai Tower 11th. Floor, All Seasons Place, Lumpini,
Pathumwan, Bangkok 10330, Thailand

CONTRACTOR :

华西发展(泰国)有限公司
บริษัท หัวซือ ดีเวลลอปเม้นต์ (ประเทศไทย) จำกัด
HUASHI DEVELOPMENT CO.,LTD
No. 202, Room No. 1403, 14/F, Le Concorde Building,
Ratchadapisek Road, Huaykhwang Sub-District,
Huaykhwang District, Bangkok Metropolitan 10310.

CONSULTANT :

ARbay
บริษัท เอ อาร์ เบย์ จำกัด
ARbay Company Limited
31 st Floor Bangkok Insurance Building
25 South Sathorn road Thungmahamek
Sathorn Bangkok 10120 THAILAND
T +66 (0) 2286 8199
F +66 (0) 2286 2863
info@arbay.co.th

CONSULTANT :

Qbic Engineers & Architects Co.,Ltd.
8 Soi KALONG 4 SANAMBINNAM ROAD,
THASAI SUB-DISTRICT, MUANG NONTHABURI DISTRICT
, NONTHABURI.
Tel 662-950-4374
Fax 662-580-3231
E-Mail : qbic@qbic.co.th, www.qbic.co.th
QBIC ENGINEERS AND ARCHITECTS CO.,LTD.

CONSULTANT :

MITR
MITR TECHNICAL CONSULTANT CO.,LTD.
1168/8 12th FLOOR, LUMPINI TOWER BUILDING,
RAMA IV RD., THUNGMAHAMEK, SATHORN, BANGKOK 10120, THAILAND
TEL : 0-2679-9079-84
FAX : 0-2679-9085 E-mail: mitr_dd@mitr.com

Architect : SIGNATURE

ประกิต พนานุรัตน์ วสถ. 580
ที่อยู่
251/1 ถ.จารุเมือง แขวงรองเมือง เขตปทุมวัน
กรุงเทพมหานคร โทรศัพท์ 02-286-8199

Structural Engineer : SIGNATURE

วิศวกรผู้ออกแบบโครงสร้าง
ณัฐสม สงวนวงษ์ วย 1423
ที่อยู่
2/1 ซ.รามคำแหง 150 ถ.รามคำแหง
แขวง สะพานสูง เขต สะพานสูง กทม. 10240

Structural Inspector : SIGNATURE

วิศวกรผู้ตรวจสอบโครงสร้าง
โกมล จุฑาภัทร วย 964
ที่อยู่
24/18 ซ.นวมินทร์ 129 ถ. นวมินทร์
แขวง นวลจันทร์ เขต บึงกุ่ม กทม. 10230

Electrical Engineer : SIGNATURE

วิศวกรผู้ออกแบบระบบไฟฟ้ากำลัง
นายสุภัทร บูรณวิทย์ วฟก.1265
ที่อยู่
21 ซอยทานสัมฤทธิ์ 13
ตำบลท่าทราย อ.เมืองนนทบุรี จ.นนทบุรี 11000

Mechanical Engineer : SIGNATURE

วิศวกรผู้ออกแบบระบบเครื่องกลและปรับอากาศ
นายประสิทธิ์ เกียวสุนทร วก.1221
ที่อยู่
44/372 ซอยบางกระดี 35/1 แขวงแสมดำ
เขตบางขุนเทียน กทม. 10150
ประสิทธิ์

Sanitary Engineer : SIGNATURE

วิศวกรผู้ออกแบบระบบสุขาภิบาล และดับเพลิง
นายทศวรรษ สนันฤทธิ์ วส. 215
ที่อยู่
บ้านเลขที่ 99/107 หมู่ที่ 3 ต.ศีรษะจรเข้น้อย
อ.บางเสาธง จ.สมุทรปราการ 10540
ทศวรรษ

ISSUE/REVISION

REV.	DESCRIPTION	DATE
A	IFC	07/04/2026
B	IFC	27/04/2026

PROJECT NAME :

GEDC 01

LOCATION:
Nikhom Phattana district, Rayong ,industrial estate,CPGC

BUILDING :
FUEL TANK

IFC

TITLE :

UNDERGROUND FUEL TANK FLOOR DETAILS

JOB NO.	SCALE
DRAWN	REF.
CHECKED YC	DWG.NO.
APPROVED ZJ	MPK00-IFC-F-GN-008
DATE 2026.04.27	

NOTE : THIS PRINT IS OF A CONFIDENTIAL NATURE, IT SHALL NOT BE TRACED,PHOTOGRAPHED,PHOTOSTATED OR REPRODUCED IN ANY MANER,NOR USED FOR ANY PURPOSE WHATSOEVER EXCEPT BY WRITTEN PERMISSION